


**SEISMIC HAZARD ZONE REPORT FOR THE
NEWHALL 7.5-MINUTE QUADRANGLE,
LOS ANGELES COUNTY, CALIFORNIA**

1997

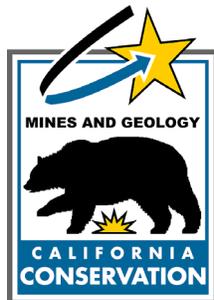

DEPARTMENT OF CONSERVATION
Division of Mines and Geology

THE RESOURCES AGENCY
MARY D. NICHOLS
SECRETARY FOR RESOURCES

STATE OF CALIFORNIA
GRAY DAVIS
GOVERNOR

DEPARTMENT OF CONSERVATION
DARRYL YOUNG
DIRECTOR



DIVISION OF MINES AND GEOLOGY
JAMES F. DAVIS, *STATE GEOLOGIST*

Copyright © 2001 by the California Department of Conservation. All rights reserved. No part of this publication may be reproduced without written consent of the Department of Conservation.

"The Department of Conservation makes no warranties as to the suitability of this product for any particular purpose."

SEISMIC HAZARD ZONE REPORT 04

**SEISMIC HAZARD ZONE REPORT FOR THE
NEWHALL 7.5-MINUTE QUADRANGLE,
LOS ANGELES COUNTY, CALIFORNIA**

CALIFORNIA GEOLOGICAL SURVEY'S PUBLICATION SALES OFFICES:

Southern California Regional Office
888 South Figueroa Street, Suite 475
Los Angeles, CA 90017
(213) 239-0878

Publications and Information Office
801 K Street, MS 14-31
Sacramento, CA 95814-3531
(916) 445-5716

Bay Area Regional Office
345 Middlefield Road, MS 520
Menlo Park, CA 94025
(650) 688-6327

CONTENTS

EXECUTIVE SUMMARY	vii
INTRODUCTION	3
SECTION 1 LIQUEFACTION EVALUATION REPORT Liquefaction Zones in the Newhall 7.5-Minute Quadrangle, Los Angeles County, California	3
PURPOSE	3
BACKGROUND	4
METHODS SUMMARY	4
SCOPE AND LIMITATIONS	5
PART I	5
PHYSIOGRAPHY	5
GEOLOGY	6
ENGINEERING GEOLOGY	8
GROUND-WATER CONDITIONS	12
PART II	15
LIQUEFACTION POTENTIAL	15
LIQUEFACTION SUSCEPTIBILITY	16
LIQUEFACTION OPPORTUNITY	17
LIQUEFACTION ZONES	19
ACKNOWLEDGMENTS	24
REFERENCES	25

SECTION 2 EARTHQUAKE-INDUCED LANDSLIDE EVALUATION REPORT Earthquake-Induced Landslide Zones in the Newhall 7.5-Minute Quadrangle, Los Angeles County, California	29
PURPOSE.....	29
BACKGROUND	30
METHODS SUMMARY.....	30
SCOPE AND LIMITATIONS.....	31
PART I.....	31
PHYSIOGRAPHY.....	31
GEOLOGY	33
ENGINEERING GEOLOGY	34
PART II.....	38
EARTHQUAKE-INDUCED LANDSLIDE HAZARD POTENTIAL.....	38
EARTHQUAKE-INDUCED LANDSLIDE HAZARD ZONE	41
ACKNOWLEDGMENTS	43
REFERENCES	43
AIR PHOTOS.....	45
APPENDIX A Source of Rock Strength Data.....	45
SECTION 3 GROUND SHAKING EVALUATION REPORT Potential Ground Shaking in the Newhall 7.5-Minute Quadrangle, Los Angeles County, California	47
PURPOSE.....	47
EARTHQUAKE HAZARD MODEL	48
APPLICATIONS FOR LIQUEFACTION AND LANDSLIDE HAZARD ASSESSMENTS	52
USE AND LIMITATIONS.....	55
REFERENCES	56

ILLUSTRATIONS

Figure 2.1. Yield Acceleration vs. Newmark Displacement for the USC Station # 14 Strong-Motion Record From the 17 January 1994 Northridge, California Earthquake.	39
Figure 3.1. Newhall 7.5-Minute Quadrangle and portions of adjacent quadrangles, 10% exceedance in 50 years peak ground acceleration (g)—Firm rock conditions.	49
Figure 3.2. Newhall 7.5-Minute Quadrangle and portions of adjacent quadrangles, 10% exceedance in 50 years peak ground acceleration (g)—Soft rock conditions.	50
Figure 3.3. Newhall 7.5-Minute Quadrangle and portions of adjacent quadrangles, 10% exceedance in 50 years peak ground acceleration (g)—Alluvium conditions.	51
Figure 3.4. Newhall 7.5-Minute Quadrangle and portions of adjacent quadrangles, 10% exceedance in 50 years peak ground acceleration—Predominant earthquake.	53
Figure 3.5. Newhall 7.5-Minute Quadrangle and portions of adjacent quadrangles, 10% exceedance in 50 years magnitude-weighted pseudo-peak acceleration for alluvium - Liquefaction opportunity	54
Table 2.1. Summary of the Shear Strength Statistics for the Newhall Quadrangle.	36
Table 2.2. Summary of the Shear Strength Groups for the Newhall Quadrangle.	37
Table 2.3. Hazard Potential Matrix for Earthquake-Induced Landslides in the Newhall Quadrangle.	41
Plate 1.1. Map depicting the portion of the Newhall quadrangle underlain by Quaternary alluvial and young fluvial sedimentary (flatland) deposits and artificial fill that are interpreted as being generally susceptible to liquefaction and were evaluated in this investigation	58
Plate 1.2. Historically Highest Ground Water and Borehole Log Data, Newhall Quadrangle.	59
Plate 2.1. Landslide Inventory, Shear Test Sample Locations, and Areas of Significant Grading, Newhall Quadrangle	60

EXECUTIVE SUMMARY

This report summarizes the methods and sources of information used to prepare the Seismic Hazard Zone Map for the Newhall 7.5-minute Quadrangle, Los Angeles County, California. The map displays the boundaries of Zones of Required Investigation for liquefaction and earthquake-induced landslides over an area of approximately 62 square miles at a scale of 1 inch = 2,000 feet.

The center of the Newhall Quadrangle lies about 30 miles northwest of the Los Angeles Civic Center. The City of Santa Clarita, including the communities of Newhall, Saugus, Valencia, and Canyon Country, covers the southeastern and east-central parts of the quadrangle. The remainder is unincorporated county land and a small part of the northeastern corner is within the Angeles National Forest. The physiography of the quadrangle includes a variety of mountainous and lowland terrains. The Santa Clara River flows across the center of the quadrangle. Residential and commercial development has replaced agricultural and grazing land uses within the area in recent decades. Modern development is characterized by mass grading of the hillside areas at a large scale, especially north of the Santa Clara River and west of Interstate 5.

The map is prepared by employing geographic information system (GIS) technology, which allows the manipulation of three-dimensional data. Information considered includes topography, surface and subsurface geology, borehole data, historical ground-water levels, existing landslide features, slope gradient, rock-strength measurements, geologic structure, and probabilistic earthquake shaking estimates. The shaking inputs are based upon probabilistic seismic hazard maps that depict peak ground acceleration, mode magnitude, and mode distance with a 10% probability of exceedance in 50 years.

Liquefaction zones in the Newhall Quadrangle cover 30-40 % of the area. Zones coincide with areas of shallow ground water such as the Santa Clara River floodplain, Castaic Creek valley and both the major and lesser canyon bottoms. Much of the deeply dissected upland terrain lies within an earthquake-induced landslide zone. Existing landslides are very abundant in the Tertiary Mint Canyon, Castaic, Towsley and Pico formations. Roughly 26% of the land in the Newhall Quadrangle lies within the landslide hazard zone.

How to view or obtain the map

Seismic Hazard Zone Maps, Seismic Hazard Zone Reports and additional information on seismic hazard zone mapping in California are available on the Division of Mines and Geology's Internet page: <http://www.conservation.ca.gov/CGS/index.htm>

Paper copies of Official Seismic Hazard Zone Maps, released by DMG, which depict zones of required investigation for liquefaction and/or earthquake-induced landslides, are available for purchase from:

BPS Reprographic Services
945 Bryant Street
San Francisco, California 94105
(415) 512-6550

Seismic Hazard Zone Reports (SHZR) summarize the development of the hazard zone map for each area and contain background documentation for use by site investigators and local government reviewers. These reports are available for reference at DMG offices in Sacramento, San Francisco, and Los Angeles. **NOTE: The reports are not available through BPS Reprographic Services.**

INTRODUCTION

The Seismic Hazards Mapping Act (the Act) of 1990 (Public Resources Code, Chapter 7.8, Division 2) directs the California Department of Conservation (DOC), Division of Mines and Geology (DMG) to delineate seismic hazard zones. The purpose of the Act is to reduce the threat to public health and safety and to minimize the loss of life and property by identifying and mitigating seismic hazards. Cities, counties, and state agencies are directed to use the seismic hazard zone maps in their land-use planning and permitting processes. They must withhold development permits for a site within a zone until the geologic and soil conditions of the project site are investigated and appropriate mitigation measures, if any, are incorporated into development plans. The Act also requires sellers (and their agents) of real property within a mapped hazard zone to disclose at the time of sale that the property lies within such a zone. Evaluation and mitigation of seismic hazards are to be conducted under guidelines established by the California State Mining and Geology Board (DOC, 1997; also available on the Internet at <http://gmw.consrv.ca.gov/shmp/webdocs/sp117.pdf>).

The Act also directs SMGB to appoint and consult with the Seismic Hazards Mapping Act Advisory Committee (SHMAAC) in developing criteria for the preparation of the seismic hazard zone maps. SHMAAC consists of geologists, seismologists, civil and structural engineers, representatives of city and county governments, the state insurance commissioner and the insurance industry. In 1991 SMGB adopted initial criteria for delineating seismic hazard zones to promote uniform and effective statewide implementation of the Act. These initial criteria provide detailed standards for mapping regional liquefaction hazards. They also directed DMG to develop a set of probabilistic seismic maps for California and to research methods that might be appropriate for mapping earthquake-induced landslide hazards.

In 1996, working groups established by SHMAAC reviewed the prototype maps and the techniques used to create them. The reviews resulted in recommendations that 1) the process for zoning liquefaction hazards remain unchanged and 2) earthquake-induced landslide zones be delineated using a modified Newmark analysis.

This Seismic Hazard Zone Report summarizes the development of the hazard zone map. The process of zoning for liquefaction uses a combination of Quaternary geologic mapping, historical ground-water information, and subsurface geotechnical data. The process for zoning earthquake-induced landslides incorporates earthquake loading, existing landslide features, slope gradient, rock strength, and geologic structure. Probabilistic seismic hazard maps, which are the underpinning for delineating seismic hazard zones, have been prepared for peak ground acceleration, mode magnitude, and mode distance with a 10% probability of exceedance in 50 years (Petersen and others, 1996) in accordance with the mapping criteria.

This report summarizes seismic hazard zone mapping for potentially liquefiable soils and earthquake-induced landslides in the Newhall 7.5-minute Quadrangle.

SECTION 1

LIQUEFACTION EVALUATION REPORT

Liquefaction Zones in the Newhall 7.5-Minute Quadrangle, Los Angeles County, California

By
Wayne D. Haydon and Allan G. Barrows

**California Department of Conservation
Division of Mines and Geology**

PURPOSE

The Seismic Hazards Mapping Act (the Act) of 1990 (Public Resources Code, Chapter 7.8, Division 2) directs the California Department of Conservation (DOC), Division of Mines and Geology (DMG) to delineate Seismic Hazard Zones. The purpose of the Act is to reduce the threat to public health and safety and to minimize the loss of life and property by identifying and mitigating seismic hazards. Cities, counties, and state agencies are directed to use seismic hazard zone maps developed by DMG in their land-use planning and permitting processes. The Act requires that site-specific geotechnical investigations be performed prior to permitting most urban development projects within seismic hazard zones. Evaluation and mitigation of seismic hazards are to be conducted under guidelines adopted by the California State Mining and Geology Board (DOC, 1997; also available on the Internet at <http://gmw.consrv.ca.gov/shmp/webdocs/sp117.pdf>).

This section of the evaluation report summarizes seismic hazard zone mapping for potentially liquefiable soils in the Newhall 7.5-minute Quadrangle. This section, along with Section 2 (addressing earthquake-induced landslides), and Section 3 (addressing potential ground shaking), form a report that is one of a series that summarizes production of similar seismic hazard zone maps within the state (Smith, 1996).

Additional information on seismic hazards zone mapping in California is on DMG's Internet web page: <http://www.conservation.ca.gov/CGS/index.htm>

BACKGROUND

Liquefaction-induced ground failure has historically been a major cause of earthquake damage in southern California. During the 1971 San Fernando and 1994 Northridge earthquakes, significant damage to roads, utility pipelines, buildings, and other structures in the Los Angeles area was caused by liquefaction-induced ground displacement.

Localities most susceptible to liquefaction-induced damage are underlain by loose, water-saturated, granular sediment within 40 feet of the ground surface. These geological and ground-water conditions exist in parts of southern California, most notably in some densely populated valley regions and alluviated floodplains. In addition, the potential for strong earthquake ground shaking is high because of the many nearby active faults. The combination of these factors constitutes a significant seismic hazard in the southern California region in general, as well as in the Newhall Quadrangle.

METHODS SUMMARY

Characterization of liquefaction hazard presented in this report requires preparation of maps that delineate areas underlain by potentially liquefiable sediment. The following were collected or generated for this evaluation:

- Existing geologic maps were used to provide an accurate representation of the spatial distribution of Quaternary deposits in the study area. Geologic units that generally are susceptible to liquefaction include late Quaternary alluvial and fluvial sedimentary deposits and artificial fill
- Construction of shallow ground-water maps showing the historically highest known ground-water levels
- Quantitative analysis of geotechnical data to evaluate liquefaction potential of deposits
- Information on potential ground shaking intensity based on DMG probabilistic shaking maps

The data collected for this evaluation were processed into a series of geographic information system (GIS) layers using commercially available software. The liquefaction zone map was derived from a synthesis of these data and according to criteria adopted by the State Mining and Geology Board (DOC, 2000).

SCOPE AND LIMITATIONS

Evaluation for potentially liquefiable soils generally is confined to areas covered by Quaternary (less than about 1.6 million years) sedimentary deposits. Such areas within the Newhall Quadrangle consist mainly of alluviated valleys, floodplains, and canyon regions. DMG's liquefaction hazard evaluations are based on information on earthquake ground shaking, surface and subsurface lithology, geotechnical soil properties, and ground-water depth, which is gathered from various sources. Although selection of data used in this evaluation was rigorous, the quality of the data used varies. The State of California and the Department of Conservation make no representations or warranties regarding the accuracy of the data obtained from outside sources.

Liquefaction zone maps are intended to prompt more detailed, site-specific geotechnical investigations, as required by the Act. As such, liquefaction zone maps identify areas where the potential for liquefaction is relatively high. They do not predict the amount or direction of liquefaction-related ground displacements, or the amount of damage to facilities that may result from liquefaction. Factors that control liquefaction-induced ground failure are the extent, depth, density, and thickness of liquefiable materials, depth to ground water, rate of drainage, slope gradient, proximity to free faces, and intensity and duration of ground shaking. These factors must be evaluated on a site-specific basis to assess the potential for ground failure at any given project site.

Information developed in the study is presented in two parts: physiographic, geologic, and hydrologic conditions in PART I, and liquefaction and zoning evaluations in PART II.

PART I

PHYSIOGRAPHY

Study Area Location and Physiography

The Newhall Quadrangle covers approximately 62 square miles of land in west-central Los Angeles County. The center of the quadrangle lies about 30 miles northwest of the Los Angeles Civic Center. The City of Santa Clarita, which incorporates the communities of Newhall, Saugus, Valencia, and Canyon Country, covers the southeastern and east central parts of the quadrangle. The remainder of the area is comprised of unincorporated county land. A small part of the northeastern corner of the map lies within the Angeles National Forest. The primary transportation routes follow the valleys of the Santa Clara River and its tributaries. Access is provided from the north and the south via Interstate Highway 5, from the east via Soledad Canyon Road and Bouquet Canyon Road, and from the west via State Highway 126.

A variety of mountainous and lowland terrains characterizes the physiography of the quadrangle. The deeply dissected, mountainous topography that separates the major canyons includes: in the southwest quarter, portions of the northern Santa Susana Mountains; in the southeastern corner, a small northwesternmost extension of the San Gabriel Mountains; and, north of the Santa Clara River Valley is a region of rugged, chaparral-covered rocky terrain.

The Santa Clara River flows across the center of the quadrangle from east to west. Major tributaries include: the South Fork of the Santa Clara River along with its branches, Newhall Creek and Placerita Creek, which joins the main stream near Bouquet Junction; Castaic Creek, which joins the river near Castaic Junction; and the unnamed streams that flow southward into the Santa Clara River from Bouquet, Dry, and San Francisquito canyons.

Residential and commercial development has replaced agricultural and grazing land uses within the area in recent decades. Modern development is characterized by mass grading of the hillside areas at a large scale, especially north of the Santa Clara River and west of Interstate 5. The remainder of the area is largely unoccupied, although oil fields, agricultural activities, small ranches, and parklands are scattered across the quadrangle.

GEOLOGY

Surficial Geology

Geologic units that generally are susceptible to liquefaction include late Quaternary alluvial and fluvial sedimentary deposits and artificial fill. The digital geologic map of Yerkes and Campbell (1995) was used to evaluate the geologic units of the study area for liquefaction. Other geologic maps reviewed for this project include Winterer and Durham (1962), Weber (1982), Smith (1984), and Treiman (1986; 1987). Only the types of geologic units that are generally susceptible to liquefaction were evaluated. Such units include the Quaternary alluvial and young fluvial sedimentary (flatland) deposits and artificial fill. The geologic map of Yerkes and Campbell (1995) provided the most detail in the mapping of the Quaternary fluvial and alluvial flatland sedimentary deposits. However, the mapping of the Quaternary deposits was inconsistent across the map and was not considered detailed or accurate enough to use for evaluating the liquefaction susceptibility of the different Quaternary units exposed in the Newhall Quadrangle. Therefore, a reconnaissance geologic map for use in this project was prepared that focused upon differentiating the Quaternary fluvial and alluvial flatland sedimentary deposits. The mapping was based on the evaluation of flatland geomorphology, aerial photograph interpretation, examination of soil survey maps (Woodruff and others, 1966), review of subsurface borehole logs and field reconnaissance. The reconnaissance geologic map differs from the map of Yerkes and Campbell (1995), in that the entire bedrock-alluvium contact was remapped in greater detail and some of the unit designations were reassigned, based upon a reevaluation of the age of each unit or its geomorphic expression. The geologic units were also grouped more consistently. Plate 1.1 presents a map depicting the portion of the Newhall Quadrangle underlain by

Quaternary alluvial and young fluvial sedimentary (flatland) deposits and artificial fill that are interpreted as being generally susceptible to liquefaction and were evaluated in this investigation.

Quaternary fluvial and alluvial flatland sedimentary deposits were mapped in the main and tributary valleys and canyons of the Santa Clara River, Castaic Creek, South Fork Santa Clara River, Soledad Canyon, Bouquet Canyon, Pico Canyon, San Francisquito Canyon, Dry Canyon, Haskell Canyon, Gavin Canyon, the unnamed valley east of Gavin Canyon, Placerita Canyon, Quigley Canyon, Newhall Creek, and Potrero Canyon and other unnamed canyons. Most of the soil series developed on the deposits, interpreted in the mapping for this project as late Holocene fluvial and alluvial units, are those generally considered to overlie Holocene geologic units (Tinsley and Fumal, 1985).

Active washes were mapped along the incised channels in the main and tributary canyons and valleys. The washes are partially filled with sand and gravel deposited as bedload by wet-season stream flow. These washes are incised into the late Holocene fluvial deposits of the valley floors. Active fluvial and fan deposits were mapped as small, planar or convex-outward, fan shaped, non-incised or slightly incised deposits, generally in the smaller tributary drainages. Included with the fans are small areas of slope wash and colluvium, which were not mapped separately for this project. On the Yerkes and Campbell (1995) map, both active washes and fluvial and fan deposits were generally mapped as "undifferentiated Quaternary alluvium" (Qal), except in the northeast quarter of the quadrangle where slope wash (Qsw) was differentiated.

Late Holocene fluvial deposits were mapped along the planar, slightly to moderately incised, gently downstream-sloping floors of all the main and many of the tributary canyons and valleys. Late Holocene alluvial terraces were mapped between the Santa Clara River and the South Fork Santa Clara River just upstream of the confluence of the Santa Clara River with the South Fork of the Santa Clara River and on the western margin of Castaic Valley in the alluvial flat north of Hasley Canyon. Late Holocene alluvial fans were mapped as the convex-outward, fan-shaped deposits that slope toward the main trunk stream and valley floor. These deposits form individual fans or coalesce to form alluvial aprons along the margins of the main canyons and valleys and emanate from some of the tributary canyons. The alluviated flatlands upslope from the fans in the tributary valleys were mapped as active or late Holocene fluvial deposits. These deposits were identified: in Castaic Valley near Castaic and emanating from Villa Canyon and Wayside Canyon; on the northern and southern margins of the Santa Clara River Valley emanating from the tributary canyons between San Francisquito Canyon and Castaic Valley; alternately on the west and east margins of San Francisquito Canyon; along the eastern margin of Dry Canyon; and along the southern margin of Pico Canyon west of Highway 5. On the Yerkes and Campbell (1995) map the late Holocene fluvial deposits and young alluvial terrace deposits and fans were generally mapped as undifferentiated Quaternary alluvium (Qal), except in Castaic Valley where the terrace deposits and fans were assigned to Holocene to Pleistocene aged older alluvium (Qao) and in the northeast quarter of the study area where the alluvium in the main valley was differentiated from alluvium in the upland tributary valleys (Qal1; Qal2), and the fans and aprons were not differentiated.

Where water levels are high, younger Holocene fluvial and alluvial deposits are generally considered to have moderate to high liquefaction susceptibility (Youd and Perkins, 1987).

Terrace deposits (Qto) and older alluvium (Qao) were mapped on erosional surfaces in the upland areas on the map of Yerkes and Campbell (1995) and during the detailed mapping for this project.

Artificial fill was mapped, both by Yerkes and Campbell (1995) and during the mapping for this project, in Bouquet Canyon, Dry Canyon and Haskell Canyon. The fill is generally thin and was placed during the grading for relatively recent, large residential and commercial developments.

The late Miocene to Pliocene marine and continental sedimentary rocks, which were deposited within the Ventura Basin, are exposed throughout the upland terrain in the Newhall Quadrangle. Terrace deposits (Winterer and Durham, 1962; Yerkes and Campbell, 1995) or “older dissected surficial sediments” (Dibblee, 1996) covers substantial portions of the southern half of the quadrangle. See the Earthquake Induced Landslide portion (Section 2) of this report for further details.

Structural Geology

The Newhall Quadrangle lies within the Transverse Ranges geomorphic province of southern California. This province is characterized by a complex series of mountain ranges and valleys with dominant east-west trends. The features are related to an underlying structural framework of aligned anticlines, synclines, and reverse fault systems. A major structural element of the western Transverse Ranges, the easternmost extent of the Ventura Basin, lies within the Newhall Quadrangle. An immense thickness of marine sedimentary rocks accumulated within the Ventura Basin in late Cenozoic time. The axis of the Ventura Basin trends east-west and coincides approximately with the trend of the Santa Clara River (Winterer and Durham, 1962).

ENGINEERING GEOLOGY

Information on subsurface geology and engineering characteristics of the flatland deposits was obtained from borehole logs collected from reports on work done in the study area. About 400 borehole logs were collected from the files of the Los Angeles County Department of Public Works; California Regional Water Quality Control Board, Los Angeles Region; and private consultants. Evaluation of borehole logs and reconnaissance mapping of the younger deposits indicate that the fluvial and alluvial deposits consist primarily of coarse-grained sediments, mostly sand, silty sand and gravel, with interbeds of silt and clay. These deposits are discussed below, grouped into three locales or physiographic environments, based on the relative proportions of the coarser-grained sediment types (sand, silty sand, and gravel) to the finer-grained material (silt and clay).

Data from borehole logs were entered into the DMG GIS database. Locations of all exploratory boreholes considered in this investigation are shown on Plate 1.2.

Construction of cross sections from the borehole logs, using the GIS, enabled the correlation of soil types from one borehole to another and outlining of areas of similar soils.

Standard Penetration Test (SPT) data provide a standardized measure of the penetration resistance of a geologic deposit and commonly are used as an index of density. Many geotechnical investigations record SPT data, including the number of blows by a 140-pound drop weight required to drive a sampler of specific dimension one foot into the soil. Recorded blow counts for non-SPT geotechnical sampling, where the sampler diameter, hammer weight or drop distance differ from those specified for an SPT (ASTM D1586), were converted to SPT-equivalent blow count values and entered into the DMG GIS. The actual and converted SPT blow counts were normalized to a common reference effective overburden pressure of 1 atmosphere (approximately 1 ton per square foot) and a hammer efficiency of 60% using a method described by Seed and Idriss (1982) and Seed and others (1985). This normalized blow count is referred to as $(N_1)_{60}$.

Geotechnical borehole logs provided information on lithologic and engineering characteristics of Quaternary deposits within the study area. Geotechnical characteristics of the Quaternary map units are generalized below.

Castaic Valley and Placerita Canyon

Along the main trunk of Castaic Creek in the Castaic Valley, from the northern boundary of the quadrangle to just north of Castaic Junction (Highway 5/126 interchange), and in Placerita Canyon, the fluvial deposits consist primarily of brown, gray and gray-brown poorly graded medium to coarse sand and well-graded fine to coarse sand, both with gravel and cobbles. In the Castaic Valley, this material also contains discontinuous interbeds of: brown or gray, silty sand with fine and/or fine to medium sand, occasionally with gravel and cobbles; and brown, fine to coarse gravel with sand or silt, and gray-brown or brown sandy silt.

The sand deposits, with incorporated gravel and cobbles, in the Castaic Valley are generally described as medium dense to very dense with SPT field N values commonly from about 40 to over 100, although some are as low as 10 to 30. However, as described in the section on Quantitative Liquefaction Analysis, the gravel clasts probably cause many of the SPT field N values to be too high. The density of the sand deposits in Placerita Canyon was not described in the logs and no SPT N values for these deposits were identified. In both Castaic Valley and Placerita Canyon, moisture contents are generally less than 15%. Locally, moisture contents are as high as 20%. Dry unit weights are generally 100 to 120 pounds per cubic foot (pcf) with a range in values from about 90 pcf to about 130 pcf. No geotechnical data were found for the gravel interbeds.

The silty sands were generally described as medium dense to dense with SPT field N values ranging from about 10 to 30. Moisture contents are generally less than 15%, with some values as high as nearly 30%. Dry unit weights are generally about 90 to 110 pcf although values range from about 65 pcf to about 135 pcf.

Based on the age and depositional environment of this deposit the sand, silty sand and gravel are interpreted as being loose to medium dense.

The silts are generally described as dense, firm or medium stiff with practically no SPT N values recorded. The few moisture contents found are generally about 15 to 20% and the few dry unit weights are generally between 85 and 90 pcf with one value as high as about 120 pcf.

Santa Clara River Valley, South Fork Santa Clara River Valley and associated larger alluvial canyons and valleys

Along the Santa Clara River Valley south of Castaic Junction, the South Fork Santa Clara River Valley, Bouquet Canyon, Soledad Canyon, the mouth of Dry Canyon, Pico Canyon, Gavin Canyon and the south half of San Francisquito Canyon, the fluvial and alluvial fan deposits consist of complexly interbedded: brown, gray-brown and red-brown silty and, occasionally, clayey, fine to medium and fine to coarse sand with little to some gravel; less brown and gray-brown poorly graded fine to medium and medium to very coarse sand and well-graded fine to very coarse sand, both with no to some gravel and cobbles; and brown sandy silt, silty clay and, occasionally, clay, both with no to little fine to medium sand. The presence and amount of sand lenses in the silt-sand strata and the gravel content in the sand units generally increases with depth. Within 30 to 40 feet of the surface, the fluvial deposits consist primarily of silty sand and the gravel content is generally described as none to few. At depths below 30 to 40 feet, the fluvial deposits consist primarily of sand and the gravel content is described as no to some gravel with cobbles. The two primary types of coarse-grained deposits, silty sand and sand, and deposits with similar gravel content are discontinuous and show little correlation between boreholes. The fine-grained deposits are more laterally continuous over various distances and can sometimes be traced for up to a mile. These fluvial deposits along the Santa Clara River Valley have significantly less gravel, more silty sand, and a greater percentage of and more continuous silt and silty clay interbeds than the fluvial deposits in Castaic Valley.

The silty sands and sands with no to few gravel clasts that are shallower than about 30 to 40 feet are generally described as medium dense to dense. The SPT field N values in these deposits are generally less than 30, however, locally SPT field N values greater than 50 blows do occur in these deposits. The silty sands and sands with no to some gravel deeper than 30 to 40 feet are generally described as dense with SPT field N values generally greater than 30, with a significant number showing values greater than 50 blows. In both the shallow and deep deposits, the silty sands and sands with gravel are more often described as dense or very dense, whereas the deposits without gravel are more often described as medium dense to dense, often regardless of the SPT N value measured. This suggests that the presence of gravel in a deposit results in a density description on the logs that often overestimates the density of the deposit, making these descriptions in units without measured SPT N values suspect. Additionally, the higher SPT N values in some of the soils are likely to be due to the gravel content. However, silty sands and sand deposits without gravel and with high SPT field N values were identified. This unit is interpreted to consist of interbedded moderately dense to dense

silty sands and sands with a greater proportion of moderately dense deposits above 30 to 40 feet and a greater proportion of dense deposits below 30 to 40 feet.

Moisture contents in the silty sands and sands are generally less than 30%. Dry unit weights are generally about 80 to 110 pcf in the silty sands and about 95 to 130 pcf in the sands. The silts and silty clays are generally described as firm, medium stiff or stiff. SPT field N values generally range between 9 and 30, with SPT field N values as low as 3 and as high as 100 blows recorded. Moisture contents are generally about 10 to 30%.

Upland alluvial valleys and alluvial fans flanking the larger and smaller alluvial canyons

In Potrero Canyon, the alluvial terraces, alluvial fans and tributary upland alluvial valleys, which are within or flank the larger canyons, the fluvial and alluvial deposits generally consist of complexly interbedded: light-brown, brown and gray-brown, silty fine to medium and fine to coarse sand, generally with no to little gravel and/or cobbles; light-brown, brown and gray-brown poorly graded fine to medium sand or well-graded fine to coarse sand with little to some gravel or cobbles; and thick to thin, discontinuous interbeds of brown sandy silt with no to few gravel.

These deposits are generally similar to the shallow deposits of the Santa Clara River Valley and associated larger alluvial canyons and valleys. However, they do contain more gravel, more silty sand, and a smaller percentage of and less continuous silt and clay interbeds than the shallow fluvial deposits in the Santa Clara River Valley.

The nature of the fluvial and alluvial deposits varies throughout the study area. The alluvial fans that flank the margins of Castaic Valley consist primarily of nearly equal amounts of sand and silty sand and contain less gravel, more fine sand and more silty sand than the fluvial deposits of the main trunk of the valley. The upland alluvial valleys, upstream of the alluvial fans flanking Castaic Valley, contain more gravel, and more silty sand than the fan deposits. In the alluvial terrace mapped on the western margin of Castaic Valley, in the alluvial flat north of Hasley Canyon, the gravel content appears to increase with depth in the sands. These deposits contain more silt beds and a similar gravel content in the deeper sands compared to the fluvial deposits along the main trunk of Castaic Valley. In the upland alluviated valleys southwest of the Santa Clara River Valley the alluvial deposits also include red-brown, silty sand and clay interbeds.

In the alluvial fans that flank Castaic Valley the sands and silty sands are generally described as medium dense and, rarely, dense with SPT field N values of less than 10 in the sands. In the silty sands, SPT field N values range from about 10 to 30, with a few values ranging from as low as 5 to as high as about 80 blows. Despite the gravel clasts, the N values appear reasonable for the age and depositional environment of this unit.

In the alluvial terrace mapped on the western margin of Castaic Valley, the density of the sands and silty sands was not described in the logs. SPT field N values in the sands range from 18 to 40 in the shallow deposits, which have lower gravel contents, and up to over 100 blows in the deeper deposits, which have a higher gravel content. The SPT field N

values in the deeper deposits are probably too high due to the gravel. No SPT N values were identified in the silty sands. The SPT field N values in the shallower deposits appear reasonable for the age and depositional environment of this unit.

The density of the sands and silty sands in the upland alluvial valleys, upstream of the alluvial fans flanking Castaic Valley, was not described and the limited number of SPT field N values obtained from the silty sands yield results where about half are less than 30 and half are greater than 30, with values as high as 75 blows with only one SPT field N value of 42 identified in sand deposits. The SPT field N values greater than 30 are interpreted as being too high due to the gravel. The SPT field N values of less than 30 in the shallower deposits appear reasonable for the age and depositional environment of this unit.

In the upland alluviated valleys southwest of the Santa Clara River Valley, the silty sands and sands are generally described mostly as medium dense and dense. No SPT field N values for these units were identified. However, the gravel content of these deposits has likely resulted in descriptions that overestimate the density of the deposits, making these descriptions suspect. Based on the age and depositional environment of these deposits, the unit is interpreted as being loose to medium dense.

Moisture contents in the sands and silty sands are generally less than 10%, with a few values as high about 15%. Dry unit weights are generally 110 to 125 pcf with values ranging from about 95 pcf to about 130 pcf. In the alluvial terrace mapped on the western margin of Castaic Valley, dry unit weights are generally about 95 to 115 pcf in the shallow deposits and between 120 and 125 pcf in the deeper deposits.

The moisture content, dry unit weight and density of the silt and clays were not described and no SPT field N values were identified for the units in the Santa Clara River Valley, Bouquet Canyon, and Soledad Canyon. In the upland alluvial valleys, upstream of the alluvial fans flanking Castaic Valley, the alluvial terrace mapped on the western margin of Castaic Valley, and the tributary upland alluvial valleys of Soledad Canyon, the density of the silts is generally described as stiff or firm with SPT field N values generally less than 8 with a few values of up to 15 identified. Moisture contents are generally less than 15% with a few values up to 25%. Dry unit weights are generally about 106 to 115 pcf with some values that are as high as about 130 pcf.

GROUND-WATER CONDITIONS

Liquefaction hazard may exist in areas where depth to ground water is 40 feet or less. DMG uses the highest known ground-water levels because water levels during an earthquake cannot be anticipated because of the unpredictable fluctuations caused by natural processes and human activities. A historical-high ground-water map differs from most ground-water maps, which show the actual water table at a particular time. Plate 1.2 depicts a hypothetical ground-water table within alluviated areas.

Ground-water conditions were investigated in the Newhall Quadrangle to evaluate the depth to saturated materials. Saturated conditions reduce the effective normal stress, thereby increasing the likelihood of earthquake-induced liquefaction (Youd, 1973). Ground-water depth data were obtained from published ground-water investigations (Robson, 1972) that summarized ground-water conditions in the study area for the years 1945 to 1967, annual maps of the ground-water elevation contour in the alluvial valley deposits prepared by the Los Angeles County Department of Public Works, Hydraulic/Water Conservation Division (LACDPW) for the years 1945 through 1995 (LACDPW, 1995), and from the collected geotechnical and environmental borehole logs. The evaluation was based on first-encountered water levels encountered in the boreholes and selected water wells. Water depths from boreholes known to penetrate confined aquifers were not utilized.

Interpretation of data from Robson (1972) and LACDPW (1995) indicates that the 1945 ground-water elevation contour map of the alluvial valley aquifer represents the shallowest recorded ground-water levels for most, but not all, of the study area. In some parts of the study area the shallowest recorded ground-water levels occurred in other years. A ground-water elevation contour map of the shallowest recorded water levels for the study area was compiled from the 1945 ground-water elevation contour map of Robson (1972) and LACDPW ground-water contour maps from various years that represented the shallowest ground-water identified in parts of the study area. The regions of the study area and the year of the ground-water elevation contour map used to compile the ground-water map are as follows: in Haskell Canyon and Bouquet Canyon from Haskell Canyon to the eastern edge of the study area, 1983; in San Francisquito Canyon, 1993; in Pico Canyon, 1947; in Gavin Canyon, 1948; in the unnamed canyon east of Gavin Canyon, 1973; in Placerita Canyon, 1995; along Newhall Creek, 1952; and in the canyon west of Newhall Creek, 1955. The depth to the shallowest recorded ground-water map is presented on Plate 1.2.

The depth-to-ground water contour map (Plate 1.2) was prepared by comparing the compiled shallowest ground-water elevations with the ground surface elevations. However, several modifications had to be made to the depth-to-ground water contour map to fill gaps and correct generalizations in the data and to make this map more accurately reflect the most likely ground-water conditions. Although flowing artesian ground-water conditions were identified in Castaic Valley and the Santa Clara River Valley, the depth to ground water in these areas was taken as 0 feet. Comparison of the Quaternary geologic map (Plate 1.1) and ground-water contour map (Plate 1.2) indicates that the monitored wells are mostly in the planar and nearly level fluvial valley deposits underlying the central valley floor and not in the sloping alluvial fans that flank the fluvial deposits, yet the ground-water contours have been drawn in the past across the entire valley, across both the fluvial and the fan deposits. Therefore, the wells accurately represent ground-water conditions in the fluvial deposits but not the fans. This makes it appear that the cross-valley ground-water surface is level under both the fluvial and the fan deposits and does not rise to follow the topography of the sloping fan surfaces. This implies that the fans and upstream smaller alluvial valleys are not contributing ground water to the larger valleys and that ground-water levels under the fans are considerably

deeper than under the adjacent fluvial deposits. Such a ground-water condition is considered very unlikely.

Accordingly, the ground-water contours that cross the valley from the fluvial valley floor to the flanking fans are considered suspect where they cross the fans. To alleviate this problem, the depth to ground water underlying the fans flanking the valleys was interpreted uniformly as the depth to ground water identified at the distal edge of the fan, along the geologic contact between the fluvial and fan deposits. This condition was identified along Castaic Valley, San Francisquito Canyon, Dry Canyon and the Santa Clara River Valley. The applicability of this method of accommodating the special aspects of ground-water levels in fans was evaluated by noting the depth to ground water in boreholes identified on the fans, adjusting the depths for the relative approximate differences in ground-water depth between the year the borehole was drilled and the year of data used to compile the depth-to-ground water map (Plate 1.2), and then comparing the adjusted ground-water level in the borehole to depth-to-ground water map. The analysis indicates that this method does a generally good job of approximating the actual depth to ground water within the alluvial fans flanking the valley floors.

Inspection of the ground-water contour map indicates that in Dry Canyon the depth to ground water approaches 65 feet about half the way up the canyon north of the Santa Clara River Valley. This deep ground-water figure is peculiar, because similar canyons to the west, San Francisquito Canyon, and to the east, Haskell Canyon, have relatively shallow ground water. This deep measurement to ground water may be the result of the monitored well having been partially completed into the Saugus Formation, identified as having deeper ground water (Robson, 1972), underlying the valley alluvium and the flow of ground water in the well from the alluvium to the Saugus, and the subsequent drawdown in the well. Therefore, the depth to ground water in the liquefaction analysis for Dry Canyon was taken as 30 feet, a depth similar to that in Haskell Canyon.

Ground-water information was generally lacking in the many small alluvial valleys that are tributary to the main valleys of Castaic Valley, Santa Clara River, South Fork Santa Clara River, Soledad Canyon, Bouquet Canyon, and Pico Canyon. These tributary canyons merge with the trunk valleys either directly onto the fluvial deposits of the valley floor or onto the alluvial fans that flank the valleys. Ground-water information is also generally lacking in the northern halves of San Francisquito Canyon, Dry Canyon and Haskell Canyon. The depth to ground water for the northern half of San Francisquito Canyon, Dry Canyon, and Haskell Canyon was taken as the northernmost depth-to-ground-water contour identified in each of the valleys, except, as noted above, for Dry Canyon. The depth to ground water for the small tributary canyons was taken as the depth to ground water identified or interpreted at the mouth of the tributary canyon where the canyon merges with either the main valley or the alluvial fans. In the southern portion of the Newhall Quadrangle, where ground water in the main valleys is generally deep, the depth to ground water in the tributary canyons and the western end of Pico Canyon was taken as 20 or 30 feet instead of the deeper value in the main valley. A shallower ground-water depth was assigned because the alluvial portion of these canyons are not areally extensive, yet they drain moderately large watersheds, and, therefore, it seems likely that some of the alluvium of these canyon can become saturated temporarily

following extended precipitation. The depth to ground water in Potrero Canyon and the unnamed canyon just to the north was taken as 25 feet based on ground-water data identified in geotechnical boreholes drilled to the west of the study area.

The historically shallowest ground-water level ranges from very shallow to deep across the study area with the shallowest water occurring in the north and the deepest water occurring in the south. In Castaic Valley, Santa Clara River, San Francisquito Canyon, Bouquet Canyon and Soledad Canyon the depth to ground water is generally less than 15 feet, with extensive areas of less than 5 feet to ground water and limited areas of 20 feet. In Bouquet Canyon the depth to ground water deepens to 20 feet at the mouth of Haskell Canyon. Water levels then deepen to 25 feet from Haskell Canyon to the eastern edge of the study area. In Haskell Canyon, the depth to ground water at the canyon mouth is 25 feet. The ground-water levels deepen to the north to a maximum of 40 feet, then shallow to 25 feet.

Ground-water levels south of the Santa Clara River, in the South Fork Santa Clara River, deepen toward the south, reaching a depth of 70 feet in Pico Canyon. In Gavin Canyon (not labeled on the map, although it extends into the Newhall Quadrangle from the Oat Mountain Quadrangle) the depth to ground water at the southern edge of the study area is less than 40 feet but to the north it deepens to 50 feet at the canyon mouth. In the unnamed valley east of Gavin Canyon, the depth to ground water is 75 feet at the southern edge of the study area and, to the north, at the canyon mouth it deepens to 100 feet. The depth to ground water in the Newhall Creek Valley is 75 feet at the southern edge of the study area and, to the north, ground water is at 85 feet. In Placerita Canyon, the depth to ground water is between 50 and 60 feet west of the tributary Quigley Canyon, whereas to the east of Quigley Canyon the depth to ground water shallows to 30 feet at the eastern edge of the study area. In Quigley Canyon the depth is interpreted to be 40 feet or less. The depth to ground water in the tributary canyons and the western end of Pico Canyon was taken as 20 or 30 feet. The depth to ground water in Potrero Canyon and the unnamed canyon just to the north was taken as 25 feet. The depth to ground water in Dry Canyon was taken as 30 feet, as stated above.

PART II

LIQUEFACTION POTENTIAL

Liquefaction may occur in water-saturated sediment during moderate to great earthquakes. Liquefied sediment loses strength and may fail, causing damage to buildings, bridges, and other structures. Many methods for mapping liquefaction hazard have been proposed. Youd (1991) highlights the principal developments and notes some of the widely used criteria. Youd and Perkins (1978) demonstrate the use of geologic criteria as a qualitative characterization of liquefaction susceptibility and introduce the mapping technique of combining a liquefaction susceptibility map and a liquefaction opportunity map to produce a liquefaction potential map. Liquefaction susceptibility is a

function of the capacity of sediment to resist liquefaction. Liquefaction opportunity is a function of the potential seismic ground shaking intensity.

The method applied in this study for evaluating liquefaction potential is similar to that of Tinsley and others (1985). Tinsley and others (1985) applied a combination of the techniques used by Seed and others (1983) and Youd and Perkins (1978) for their mapping of liquefaction hazards in the Los Angeles region. This method combines geotechnical analyses, geologic and hydrologic mapping, and probabilistic earthquake shaking estimates, but follows criteria adopted by the State Mining and Geology Board (DOC, 2000).

LIQUEFACTION SUSCEPTIBILITY

Liquefaction susceptibility reflects the relative resistance of a soil to loss of strength when subjected to ground shaking. Physical properties of soil such as sediment grain-size distribution, compaction, cementation, saturation, and depth govern the degree of resistance to liquefaction. Some of these properties can be correlated to a sediment's geologic age and environment of deposition. With increasing age, relative density may increase through cementation of the particles or compaction caused by the weight of the overlying sediment. Grain-size characteristics of a soil also influence susceptibility to liquefaction. Sand is more susceptible than silt or gravel, although silt of low plasticity is treated as liquefiable in this investigation. Cohesive soils generally are not considered susceptible to liquefaction. Such soils may be vulnerable to strength loss with remolding and represent a hazard that is not addressed in this investigation. Soil characteristics and processes that result in higher measured penetration resistances generally indicate lower liquefaction susceptibility. Thus, blow count and cone penetrometer values are useful indicators of liquefaction susceptibility.

Saturation is required for liquefaction, and the liquefaction susceptibility of a soil varies with the depth to ground water. Very shallow ground water increases the susceptibility to liquefaction (soil is more likely to liquefy). Soils that lack resistance (susceptible soils) typically are saturated, loose and sandy. Soils resistant to liquefaction include all soil types that are dry, cohesive, or sufficiently dense.

DMG's map inventory of areas containing soils susceptible to liquefaction begins with evaluation of geologic maps and historical occurrences, cross-sections, geotechnical test data, geomorphology, and ground-water hydrology. Soil properties and soil conditions such as type, age, texture, color, and consistency, along with historical depths to ground water are used to identify, characterize, and correlate susceptible soils. Because Quaternary geologic mapping is based on similar soil observations, liquefaction susceptibility maps typically are similar to Quaternary geologic maps. DMG's qualitative susceptible soil inventory is summarized below.

The susceptibility of a deposit to liquefaction during future earthquakes was characterized by grouping deposits into high, moderate, low, and very low susceptibility categories based on depth to ground water, type of sediment, texture, consistency, and the

quantitative liquefaction analyses. Pre-Quaternary, bedrock geologic units are considered to have very low susceptibility.

The liquefaction analyses identified liquefiable strata in greater than 90% of the boreholes analyzed in areas underlain by late Holocene fluvial and alluvial deposits that did not contain gravel. On the basis of the liquefaction analysis and re-analysis of the subsurface soils encountered in the boreholes and the interpreted Quaternary geology, the fluvial and alluvial flatland valley and fan deposits in the Newhall Quadrangle with an historic shallow ground-water depth of less than 40 feet are considered to meet the liquefaction susceptibility zoning criteria under the applied ground motion. All the geologic units either were shown to contain liquefiable sediments by the liquefaction analysis, or were judged to potentially contain liquefiable sediments by correlation with adjacent units or similar units in other portions of the study area or because such units were of similar age and mode of deposition. Sufficient geotechnical data to fully analyze all the units in all portions of the study area were simply not available.

The Quaternary terrace deposits mapped in the uplands of the study area are considered to be too consolidated and be above the regional ground-water table to meet the liquefaction susceptibility zoning criteria under the applied ground motion.

LIQUEFACTION OPPORTUNITY

Liquefaction opportunity is a measure, expressed in probabilistic terms, of the potential for strong ground shaking. Analyses of in-situ liquefaction resistance require assessment of liquefaction opportunity. The minimum level of seismic excitation to be used for such purposes is the level of peak ground acceleration (PGA) with a 10% probability of exceedance over a 50-year period (DOC, 2000). The earthquake magnitude used in DMG's analysis is the magnitude that contributes most to the calculated PGA for an area.

For the Newhall Quadrangle, a peak acceleration of 0.60 g resulting from an earthquake of magnitude 7.0 was used for liquefaction analyses. The PGA and magnitude values were based on de-aggregation of the probabilistic hazard at the 10% in 50-year hazard level (Petersen and others, 1996; Cramer and Petersen, 1996). See the ground motion section (3) of this report for further details.

Quantitative Liquefaction Analysis

DMG performs quantitative analysis of geotechnical data to evaluate liquefaction potential using the Seed Simplified Procedure (Seed and Idriss, 1971; Seed and others, 1983; Seed and others, 1985; National Research Council, 1985; Seed and Harder, 1990; Youd and Idriss, 1997). This procedure calculates soil resistance to liquefaction, expressed in terms of cyclic resistance ratio (CRR) based on standard penetration test (SPT) results, ground-water level, soil density, moisture content, soil type, and sample depth. CRR values are then compared to calculated earthquake-generated shear stresses expressed in terms of cyclic stress ratio (CSR). The factor of safety (FS) relative to liquefaction is: $FS = CRR/CSR$. FS, therefore, is a quantitative measure of liquefaction

potential. DMG uses a factor of safety of 1.0 or less, where CSR equals or exceeds CRR, to indicate the presence of potentially liquefiable soil. While an FS of 1.0 is considered the “trigger” for liquefaction, for a site specific analysis an FS of as much as 1.5 may be appropriate depending on the vulnerability of the site related structures. For a regional assessment DMG normally has a range of FS that results from the liquefaction analyses. The DMG liquefaction analysis program calculates an FS at each sample that has blow counts. The lowest FS in each borehole is used for that location. These FS vary in reliability according to the quality of the geotechnical data. These FS as well as other considerations such as slope, free face conditions, and thickness and depth of potentially liquefiable soil are evaluated in order to construct liquefaction potential maps, which then directly translate to zones of required investigation.

Of the approximately 400 geotechnical borehole logs reviewed in this study (Plate 1.2), fewer than 85 include blow-count data from SPT's or from penetration tests that allow reasonable blow count translations to SPT-equivalent values. Non-SPT values, such as those resulting from the use of 2-inch or 2 1/2-inch inside diameter ring samplers, were translated to SPT-equivalent values if reasonable factors could be used in conversion calculations. The reliability of the SPT-equivalent values varies. Therefore, they are weighted and used in a more qualitative manner. Few borehole logs, however, include all of the information (soil density, moisture content, sieve analysis, etc) required for an ideal Seed Simplified Analysis. For boreholes having acceptable penetration tests, liquefaction analysis is performed using logged density, moisture, and sieve test values or using average test values of similar materials.

The liquefaction evaluation procedures were developed primarily for clean sands and silty sands. Results depend greatly on the accurate evaluation of the in-situ density of soils as measured by the number (N) of soil penetration blow counts using a soil penetration test (SPT) sampler or a cone-penetrometer test (CPT). However, many of the Holocene fluvial and alluvial deposits in the Newhall Quadrangle contain a significant gravel component. In the past, gravelly soils were considered not to be susceptible to liquefaction because the high permeability of such soils would allow the dissipation of pore water pressures before liquefaction could occur. However, liquefaction in gravelly soils has been observed during many earthquakes and recent laboratory studies have shown that certain gravelly soils are susceptible to liquefaction.

Field and laboratory studies regarding the liquefaction susceptibility of gravelly sands (Sy and others, 1996; Budiman and Mohammadi, 1996; Harder and Seed, 1986; Ishihara, 1995; and Evans and Zhou, 1995) indicate that *sandy* and *silty* gravels have significantly lower permeabilities than *clean* gravels and, therefore, do not dissipate excess pore pressures quickly enough to prevent liquefaction. Boundary drainage conditions were found to be important. For example, the presence of an impervious surface layer can impede drainage leading to liquefaction of underlying gravelly soils.

Liquefaction susceptibility is dependent on the gravel content of the soil, the presence of a liquefiable sand lens in the gravelly unit, and, in matrix supported gravels, on the density of the matrix sand. The liquefaction susceptibility of sand and gravel composites may decrease considerably with increasing gravel content. Gravel contents of less than 20

to 25% were found not to decrease liquefaction susceptibility and may increase susceptibility, whereas deposits with 40 to 60% gravel and a moderately dense sand matrix had the liquefaction susceptibility of dense sand. In general, loose to medium dense gravelly sands, with equivalent sand SPT N values less than about 20 are susceptible to liquefaction.

SPT- or CPT-derived density measurements in gravelly soils are unreliable and generally too high because the gravel clasts are too large to fit into the sampler or they bridge the opening of the sampler. The sampler tends to bounce on the clasts in such gravels. Field methods developed to evaluate the liquefaction susceptibility of gravelly soils include:

- using the lowest recorded N value as a representative of the gravelly soil status;
- recording N values for small-depth increments to assess the effect of gravel clasts as a basis for rejection or acceptance of the N value or to infer the N value for the finer-grained matrix of the gravelly deposit;
- or to use a large-scale penetration test such as the Becker Hammer Drill, adjust the N values from the Becker test using established relationships to the SPT N values, and then using the adjusted N values in the liquefaction evaluation as for sand.

The quantitative liquefaction analysis performed for this study was complicated by the gravel component of many of the soils. Many of the N values from the gravelly sand strata are suspected of being too high, for the reasons discussed above. They are likely to lead to overestimation of the density of the soil and, therefore, result in an underestimation of the liquefaction susceptibility. To overcome this problem, the computerized analysis was reinterpreted to account for the gravel content. The log of each borehole was compared to the liquefaction analysis to evaluate if the results of the analysis appeared to have been affected by N values that are too high due to the presence of gravel. Correlations were made between boreholes to identify potentially liquefiable units where the N values appeared to have been affected by gravel content with areas where the N values do not appear to have been affected by the soil gravel content and areas where the boreholes lacked N values, and, accordingly, where no liquefaction analyses were conducted.

LIQUEFACTION ZONES

Criteria for Zoning

Areas underlain by materials susceptible to liquefaction during an earthquake were included in liquefaction zones using criteria developed by the Seismic Hazards Mapping Act Advisory Committee and adopted by the California State Mining and Geology Board (DOC, 2000). Under those guideline criteria, liquefaction zones are areas meeting one or more of the following:

1. Areas known to have experienced liquefaction during historical earthquakes

2. All areas of uncompacted artificial fill containing liquefaction-susceptible material that are saturated, nearly saturated, or may be expected to become saturated
3. Areas where sufficient existing geotechnical data and analyses indicate that the soils are potentially liquefiable
4. Areas where existing geotechnical data are insufficient

In areas of limited or no geotechnical data, susceptibility zones may be identified by geologic criteria as follows:

- a) Areas containing soil deposits of late Holocene age (current river channels and their historic floodplains, marshes and estuaries), where the M7.5-weighted peak acceleration that has a 10% probability of being exceeded in 50 years is greater than or equal to 0.10 g and the water table is less than 40 feet below the ground surface; or
- b) Areas containing soil deposits of Holocene age (less than 11,000 years), where the M7.5-weighted peak acceleration that has a 10% probability of being exceeded in 50 years is greater than or equal to 0.20 g and the historical high water table is less than or equal to 30 feet below the ground surface; or
- c) Areas containing soil deposits of latest Pleistocene age (11,000 to 15,000 years), where the M7.5-weighted peak acceleration that has a 10% probability of being exceeded in 50 years is greater than or equal to 0.30 g and the historical high water table is less than or equal to 20 feet below the ground surface.

Application of SMGB criteria to liquefaction zoning in the Newhall Quadrangle is summarized below.

Areas of Past Liquefaction

Liquefaction resulting from the San Fernando earthquake of February 9, 1971 was not specifically identified in the study area, although damage was reported in the towns of Newhall and Saugus resulting from ground shaking on graded alluvium (Evans, 1975). Liquefaction-related ground settlement, abundant ground fractures, and sandblows resulting from the Northridge earthquake of January 17, 1994 were identified in Potrero Canyon in the Val Verde Quadrangle to the west of the study area (Rymer and others, 1995). Ground ruptures and other speculated liquefaction effects were also identified at numerous localities along the Santa Clara River (Stewart and others, 1994).

The Northridge earthquake also caused concentrations of structural and pipeline damage in Pico Canyon and the Newhall area which have been speculated to be potentially caused by liquefaction (Stewart and others, 1994) and (Hodgkinson and others, 1996). Although no conclusive evidence of liquefaction, such as sand boils, was identified in the areas where structural or pipeline damage occurred, pipe break descriptions do suggest that lateral ground movement had occurred. It is important to note, however, that the subsurface data collected for this investigation indicate the depth to ground water in Pico Canyon and the Newhall area is greater than 60 feet and, there, no significant confining

beds to create shallow perched ground water were identified in this investigation. The areal extent of damage appears to be too large to represent an area temporarily saturated by a flowing stream and, as the Los Angeles area had received less than 1 inch of rain since the beginning of the 1994-1995 water year prior to the earthquake (LACDPW, 1995), it is unlikely that enough water was available to saturate soils in the area damaged. Therefore, it appears the damage in these areas was not the result of liquefaction. These areas were not included in the liquefaction zones.

Artificial Fills

Large artificial fills are judged to be recent enough to have been placed using modern grading codes and, therefore, are assumed to have low liquefaction susceptibility. The liquefaction susceptibility for areas underlain by artificial fill was based on the liquefaction susceptibility of the underlying natural geological unit.

Areas with Sufficient Existing Geotechnical Data

An area of the Santa Clara River between Castaic Junction and Bouquet Canyon and south to Magic Mountain Parkway (Highway 126) contains the largest number and highest concentration of boreholes with SPT field N values and liquefaction analyses in the study area. Late Holocene fluvial and alluvial deposits that are considered to have high liquefaction susceptibility based on their age and mode of deposition underlie this area. The ground-water table has been encountered at a depth of generally less than 20 feet in the main canyon and is inferred to be at a depth of less than 20 feet in the tributary canyons. Practically all of the analyses identify liquefiable sediments. The Santa Clara River and small tributary canyons between Castaic Junction and Bouquet Canyon were, therefore, included in the liquefaction zone.

Areas with Insufficient Existing Geotechnical Data

The small tributary canyons flanking the Santa Clara River between Castaic Junction and Dry Canyon and south to Magic Mountain Parkway (Highway 126) contained very few, unevenly distributed boreholes with SPT field N values and liquefaction analyses. Late Holocene fluvial and alluvial deposits that are considered to have high liquefaction susceptibility based on their age and mode of deposition underlie this area. It is presumed that these sediments become saturated during periods of heavy precipitation and the ground-water table is inferred to be at a depth of less than 20 feet in the tributary canyons. Also, the anticipated PGA having a 10% probability of being exceeded in 50 years is greater than 0.1g. As a result, the small tributary canyons flanking the Santa Clara River Valley between Castaic Valley and Dry Canyon fall under Criteria item 4a (see above) and are, therefore, included within liquefaction zones.

Bouquet Canyon and Soledad Canyon both had only a few boreholes with SPT field N values and liquefaction analyses. The small tributary canyons in this area contain even fewer scattered boreholes with SPT field N values and liquefaction analyses. Late Holocene fluvial and alluvial geologic deposits that are considered to have high liquefaction susceptibility based on their age and mode of deposition underlie these

canyons. The water table has been measured at a depth of generally less than 20 feet in the main canyons and it is inferred to be at a depth of less than 20 feet in the tributary canyons. All of the available analyses identify liquefiable sediments. Also, the anticipated PGA having a 10% probability of being exceeded in 50 years is greater than 0.1g. As a result, Bouquet Canyon, Soledad Canyon and associated small tributaries fall under Criteria item 4a (see above) and were included in the liquefaction zone based primarily on the shallow ground water and on the overall liquefaction susceptibility of the near-surface geologic units, supplemented by the limited subsurface data.

Haskell Canyon and Dry Canyon both had no boreholes with SPT field N values and liquefaction analyses. Late Holocene fluvial and alluvial deposits that are considered to have high liquefaction susceptibility based on their age and mode of deposition underlie these canyons. The measured depth to ground water in the southern half of the canyons is generally less than 30 or 40 feet. The inferred depth-to-ground water in the northern half of the canyons of 30 to 40 feet is based on correlation with the southern half of the canyons. Also, the anticipated PGA having a 10% probability of being exceeded in 50 years is greater than 0.1g. As a result, Haskell Canyon, Dry Canyon and associated small tributary canyons fall under Criteria item 4a (see above) and were included in the liquefaction zone based primarily on the measured and inferred shallow ground water and on the overall liquefaction susceptibility of the underlying geologic units.

San Francisquito Canyon had only a few boreholes with SPT field N values and liquefaction analyses in the southern portion of the canyon. The small tributary canyons in this area contain even fewer, scattered boreholes with SPT field N values and liquefaction analyses. Late Holocene fluvial and alluvial deposits that are considered to have high liquefaction susceptibility based on their age and mode of deposition underlie these canyons. The measured depth to ground water in the southern half of the canyon is generally less than 20 feet. The inferred depth to ground water in the northern half of the canyon is 20 feet and is based on correlation with southern half of the canyon. All of the analyses identify liquefiable sediments. Also, the anticipated PGA having a 10% probability of being exceeded in 50 years is greater than 0.1g. As a result, San Francisquito Canyon and small tributary canyons fall under Criteria item 4a (see above) and were included in the liquefaction zone based primarily on the measured and inferred shallow ground water and on the overall liquefaction susceptibility.

Castaic Valley contains a moderate number of boreholes with SPT field N values and liquefaction analyses. The small tributary canyons in this area also contain a moderate number of unevenly distributed boreholes with SPT field N values and liquefaction analyses. Late Holocene fluvial and alluvial fan deposits that are considered to have high liquefaction susceptibility based on their age and mode of deposition underlie this area. The ground-water table has been measured at a depth of generally less than 20 feet in the main canyon and inferred to be at a depth of less than 20 feet in the tributary canyons. Practically all of the analyses in the fan deposits along the margin of the valley floor identified liquefiable sediments; whereas, none of the analyses in the fluvial deposits underlying the valley floor identified liquefiable sediments. However, this situation is attributed to the high gravel content of the deposits beneath the valley floor, which has resulted in SPT field N values from the gravelly sand strata that are likely to be too high

and lead to overestimation of the density of the soil and, therefore, underestimation of the liquefaction susceptibility of the deposit. Also, the anticipated PGA having a 10% probability of being exceeded in 50 years is greater than 0.1g. As a result, the portions of Castaic Valley and the small tributary canyons underlain by both the fluvial and fan deposits fall under Criteria item 4a (see above) and were included in the liquefaction zone based primarily on the measured and inferred shallow ground water, the overall liquefaction susceptibility of the underlying geologic units, the reevaluation of the liquefaction analyses to account for the gravel content, and supplemented by the limited subsurface data in the small tributary canyons.

South Fork Santa Clara River, south of the Magic Mountain Parkway (Highway 126 or Saugus-Ventura Road on the base map), contains only a few boreholes with SPT field N values and liquefaction analyses. The small tributary canyons in this area contain no boreholes with SPT field N values and liquefaction analyses. Late Holocene fluvial and alluvial deposits that are considered to have high liquefaction susceptibility based on their age and mode of deposition underlie this area. The measured depth to ground water at the west end of Magic Mountain Parkway in the valley is about 15 feet and deepens toward the east to about 30 feet at the east end of that road at the eastern valley margin. Ground water deepens toward the south, reaching depths of about 70 to 100 feet at the confluence of Pico Canyon, Gavin Canyon, Newhall Creek Valley, and Placerita Canyon. Also, the anticipated PGA having a 10% probability of being exceeded in 50 years is greater than 0.1g. As a result, the portions of the South Fork Santa Clara River with depths to ground water of less than 40 feet and the small tributary canyons fall under Criteria item 4a (see above) and were included in the liquefaction zone based primarily on the measured shallow ground-water depth and on the overall liquefaction susceptibility of the underlying geologic units, supplemented by the limited subsurface data.

Pico Canyon contains only a few boreholes with SPT field N values and liquefaction analyses. The small tributary canyons in this area contain no boreholes with SPT field N values and liquefaction analyses. Late Holocene fluvial and alluvial deposits that are considered to have high liquefaction susceptibility based on their age and mode of deposition underlie this area. Ground water in most of Pico Canyon is 55 to 75 feet deep; in the tributary canyons and the western end of the canyon ground water is interpreted to be at 20 or 30 feet. Also, the anticipated PGA having a 10% probability of being exceeded in 50 years is greater than 0.1g. As a result, the western end and tributary canyons of Pico Canyon fall under Criteria item 4a (see above) and were included in the liquefaction zone based primarily on the interpreted shallow ground water and on the overall liquefaction susceptibility of the underlying geologic units, supplemented by the limited subsurface data.

Placerita Canyon or its small tributary canyons contains no borehole data with SPT field N values or liquefaction analyses. Ground water in Placerita Canyon is deeper than 50 feet west of the mouth of Quigley Canyon. To the east of the junction with Quigley Canyon ground water shallows to 30 feet at the eastern edge of the Newhall Quadrangle and in Quigley Canyon, the depth is interpreted to be 40 feet or less. Also, the anticipated PGA having a 10% probability of being exceeded in 50 years is greater than

0.1g. As a result, an approximately 1,800-foot stretch of Placerita Canyon near the eastern boundary of the Newhall Quadrangle, where the depth to ground water is less than 40 feet, and Quigley Canyon both fall under Criteria item 4a (see above) and were included in the liquefaction zone based primarily on the interpreted shallow ground water and on the overall liquefaction susceptibility of the underlying geologic units. Placerita Canyon west of Quigley Canyon was not included in the liquefaction zone based primarily on the measured depths of the ground water.

Gavin Canyon (not labeled on the map), through which Interstate Highway 5 enters the Newhall area from the south and Newhall Creek Valley contain only a few boreholes with SPT field N values and liquefaction analyses. The small tributary canyons in this area and the unnamed valley east of Gavin Canyon contain no boreholes with SPT field N values and liquefaction analyses. The ground-water table in Gavin Canyon is less than 40 feet deep at the southern edge of the study area and deepens toward the north to 50 feet at the canyon mouth. The depth to ground water in the Newhall Creek Valley is greater than 75 feet. Also, the anticipated PGA having a 10% probability of being exceeded in 50 years is greater than 0.1g. As a result, that portion of Gavin Canyon with a depth to ground water of less than 40 feet falls under Criteria item 4a (see above) and was included in the liquefaction zone based primarily on the interpreted shallow ground water and on the overall liquefaction susceptibility of the underlying geologic units. Newhall Creek Valley and the unnamed valley east of Gavin Canyon was not included in the liquefaction zone based primarily on the measured deep ground water.

Potrero Canyon and the unnamed canyon just to the north contain no boreholes with SPT field N values and liquefaction analyses. The depth to ground water in Potrero Canyon and the unnamed canyon just to the north was interpreted as 25 feet. Liquefaction-related ground deformation, ground fracturing, and sandblows resulting from Northridge earthquake of January 17, 1994 occurred in Potrero Canyon (Rymer and others, 1995). Also, the anticipated PGA having a 10% probability of being exceeded in 50 years is greater than 0.1g. As a result, Potrero Canyon and the unnamed canyon just to the north were included in the liquefaction zone based primarily on the occurrence of surface manifestations of liquefaction in Potrero Canyon triggered by the Northridge earthquake, the shallowness of the ground water, and on the overall liquefaction susceptibility of the underlying geologic units.

ACKNOWLEDGMENTS

The authors would like to thank the staff at the Los Angeles County Department of Public Works, Materials Engineering Division and Hydraulic/Water Conservation Division, and the California Regional Water Quality Control Board, Los Angeles Region, for their assistance in the collection of subsurface borehole data. Marshall Lew of Law-Crandall, Inc., Mark Frankian of R.T Frankian & Associates, and Bruce Clark of Leighton and Associates generously provided access to pertinent report files at their firms and assistance in the collection of ground-water and borehole data. At DMG, special thanks to Bob Moskovitz, Teri McGuire, Scott Shepherd, and Barbara Wanish for their

GIS operations support, and to Joy Arthur for designing and plotting the graphic displays associated with the liquefaction zone map and this report.

REFERENCES

- American Society for Testing and Materials, 1999, Standard test method for penetration test and split-barrel sampling of soils, Test Method D1586-99, *in* Annual Book of ASTM Standards, v. 4.08.
- Budiman, J.S. and Mohammadi, Jamshid, 1995, Effect of large inclusions on liquefaction of sands, *in* Evans, M.D. and Frigaszy, R.J., *editors*, Static and Dynamic properties of Gravelly Soils: American Society of Civil Engineers Geotechnical Special Publication no. 56, p. 48-63.
- California Department of Conservation, Division of Mines and Geology, 1997, Guidelines for evaluating and mitigating seismic hazards in California, Special Publication 117, 74 p.
- California Department of Conservation, Division of Mines and Geology, 2000, Recommended criteria for delineating seismic hazard zones in California, Special Publication 118, 12 p.
- Cramer, C.H. and Petersen, M.D., 1996, Predominant seismic source distance and magnitude maps for Los Angeles, Orange, and Ventura counties, California: Bulletin of Seismological Society of America, v. 86, no. 5, p. 1,645-1,649.
- Dibblee, T.W., Jr., 1996, Geologic map of the Newhall Quadrangle, Los Angeles County, California: Dibblee Geological Foundation Map DF # 56, scale 1:24,000.
- Evans, J.R., 1975, Geologic Effects of the San Fernando earthquake in the Newhall-Saugus-Valencia-Solemint Area, *in* Oakeshott, G.B., *editor*, San Fernando earthquake of 9 February, 1971: California Division of Mines and Geology Bulletin 196, p. 137-144.
- Evans, M.D. and Zhou, Shengping, 1995, Liquefaction Behaviour of Sand-Gravel Composites: American Society of Civil Engineers, Journal of Geotechnical Engineering, v. 121, no. 3, p. 287-298.
- Harder, L.F. and Seed, H.B., 1986, Determination of penetration resistance for coarse-grained soils using the Becker Hammer Drill: University of California at Berkeley, College of Engineering, Earthquake Engineering Research Center, Report No. UCB/EERC-86/06, p. 126.
- Hodgkinson, K.M., Stein, R.S., Hudnut, K.W., Satalich, Jay and Richards, H.H., 1996, Damage and restoration of geodetic infrastructure caused by the 1994 Northridge, California, earthquake: U.S. Geological Survey Open-File Report 96-517.

- Ishihara, Kenji, 1995, Stability of Natural Deposits During Earthquakes: *in* Proceedings International Conference of Soil Mechanics and Foundation Engineers, San Francisco, v. 1.
- LACDPW, 1995, Santa Clarita Ground-Water Contours, separate maps for the fall of each year from 1945 through 1995: Los Angeles County Department of Public Works.
- Moehle, J.P., *editor*, 1994, Preliminary report on the seismological and engineering aspects of the January 17, 1994 Northridge earthquake: University of California at Berkeley, College of Engineering, Earthquake Engineering Research Center, Report No. UCB/EERC-94/01, 66 p.
- National Research Council, 1985, Liquefaction of soils during earthquakes: National Research Council Special Publication, Committee on Earthquake Engineering, National Academy Press, Washington, D.C., 240 p.
- Petersen, M.D., Bryant, W.A., Cramer, C.H., Cao, T., Reichle, M.S., Frankel, A.D., Lienkaemper, J.J., McCrory, P.A. and Schwartz, D.P., 1996, Probabilistic seismic hazard assessment for the State of California: California Department of Conservation, Division of Mines and Geology Open-File Report 96-08; also U.S. Geological Survey Open-File Report 96-706, 33 p.
- Robson, S.G., 1972, Water-Resources Investigation using analog model techniques in the Saugus-Newhall Area, Los Angeles County, California: U.S. Geological Survey Open-File Report, 58 p.
- Rymer, M.J., Fumal, T.E., Schwartz, D.P., Powers, T.J. and Cinti, F.R., 1995, Distribution and recurrence of surface fractures in Potrero Canyon associated with the 1994 Northridge, California, earthquake, *in* Woods, Mary C. and Seiple, W. Ray, *editors*, The Northridge, California, earthquake of 17 January 1994: California Department of Conservation, Division of Mines and Geology Special Publication 116, p. 133-146.
- Seed, H.B. and Idriss, I.M., 1971, Simplified procedure for evaluating soil liquefaction potential: Journal of the Soil Mechanics and Foundations Division of ASCE, v. 97: SM9, p. 1,249-1,273.
- Seed, H.B. and Idriss, I.M., 1982, Ground motions and soil liquefaction during earthquakes: Monograph Series, Earthquake Engineering Research Institute, Berkeley, California, 134 p.
- Seed, H.B., Idriss, I.M. and Arango, Ignacio, 1983, Evaluation of liquefaction potential using field performance data: Journal of Geotechnical Engineering, v. 109, no. 3, p. 458-482.

- Seed, H.B., Tokimatsu, Kohji, Harder, L.F., and Chung, R.M., 1985, Influence of SPT procedures in soil liquefaction resistance evaluations: *Journal of Geotechnical Engineering*, ASCE, v. 111, no. 12, p. 1,425-1,445.
- Seed, R.B. and Harder, L.F., 1990, SPT-based analysis of cyclic pore pressure generation and undrained residual strength: *Proceedings of the H. Bolton Seed Memorial Symposium*, v. 2, p. 351-376.
- Smith, D.P., 1984, *Geology of the northeast quarter of the Newhall Quadrangle, Los Angeles County, California*: California Department of Conservation, Division of Mines and Geology Open-File Report 84-49, 42 p., map scale 1:24,000.
- Smith, T.C., 1996, Preliminary maps of seismic hazard zones and draft guidelines for evaluating and mitigating seismic hazards: *California Geology*, v. 49, no. 6, p. 147-150.
- Stewart, J.P., Bray, J.D., Seed, R.B. and Sitar, Nicholas, *editors*, 1994, Preliminary report on the principal geotechnical aspects of the January 17, 1994 Northridge earthquake: University of California at Berkeley, College of Engineering, Earthquake Engineering Research Center, Report No. UCB/EERC-94/08, 245 p.
- Sy, Alex, Campanella, R.G. and Stewart, R.A., 1995, BPT-SPT correlations for evaluations of liquefaction resistance in gravelly soils, *in* Evans, M.D. and Frigaszy, R.J., *editors*, *Static and Dynamic Properties of Gravelly Soils*: American Society of Civil Engineers Geotechnical Special Publication no. 56, p. 1-19.
- Tinsley, J.C. and Fumal, T.E., 1985, Mapping Quaternary sedimentary deposits for areal variations in shaking response, *in* Ziony, J. I., *editor*, *Evaluating earthquake hazards in the Los Angeles Region -- An earth-science perspective*: U.S. Geological Survey Professional Paper 1360, p. 101-125.
- Tinsley, J.C., Youd, T.L., Perkins, D.M. and Chen, A.T.F., 1985, Evaluating liquefaction potential, *in* Ziony, J.I., *editor*, *Evaluating earthquake hazards in the Los Angeles region — An earth science perspective*: U.S. Geological Survey Professional Paper 1360, p. 263-316.
- Treiman, J.A., 1986, *Landslide hazards in the west half of the Newhall Quadrangle, Los Angeles County, California*: California Department of Conservation, Division of Mines and Geology Open-File Report 86-6, scale 1:24,000.
- Treiman, J.A., 1987, *Landslide hazards in the east half of the Newhall Quadrangle, Los Angeles County, California*: California Department of Conservation, Division of Mines and Geology Open-File Report 86-16, scale 1:24,000.
- Weber, F.H. Jr., 1982, *Geology and geomorphology along the San Gabriel Fault Zone, Los Angeles and Ventura Counties, California*: California Department of Conservation, Division of Mines and Geology Open-File Report 82-2, 157 p., map scale 1:24,000.

- Winterer, E.L. and Durham, D.L., 1962, Geology of southeastern Ventura Basin, Los Angeles County, California: U.S. Geological Survey Professional Paper 334-H, p. 275-366.
- Woodruff, G.A., McCoy, W.J., Sheldon, W.B., Kover, R.W. and Taniguchi, Masao, 1966, Soil and rural fringe interpretations, and interim report of the Saugus-Newhall Area, A portion of the Northern Los Angeles County Soil Survey, California: U.S. Department of Agriculture, Soil Conservation Service, 58 p., map scale 1:24,000.
- Yerkes, R.F. and Campbell, R.H., 1995, Preliminary geologic map of the Newhall 7.5' Quadrangle, southern California: U.S. Geological Survey Open File Report 95-503, scale 1:24,000.
- Youd, T.L., 1973, Liquefaction, flow and associated ground failure: U.S. Geological Survey Circular 688, 12 p.
- Youd, T.L., 1991, Mapping of earthquake-induced liquefaction for seismic zonation: Earthquake Engineering Research Institute, Proceedings, Fourth International Conference on Seismic Zonation, v. 1, p. 111-138.
- Youd, T.L. and Idriss, I.M., 1997, *editors*, Proceedings of the NCEER workshop on evaluation of liquefaction resistance of soils: National Center for Earthquake Engineering Research Technical Report NCEER-97-0022, 276 p.
- Youd, T.L. and Perkins, D.M., 1978, Mapping liquefaction-induced ground failure potential: Journal of Geotechnical Engineering, v. 104, p. 433-446.

SECTION 2 EARTHQUAKE-INDUCED LANDSLIDE EVALUATION REPORT

Earthquake-Induced Landslide Zones in the Newhall 7.5-Minute Quadrangle, Los Angeles County, California

By

**Rick I. Wilson, Timothy P. McCrink, Pamela J. Irvine, Michael A.
Silva, and John P. Schlosser**

**California Department of Conservation
Division of Mines and Geology**

PURPOSE

The Seismic Hazards Mapping Act (the Act) of 1990 (Public Resources Code, Chapter 7.8, Division 2) directs the California Department of Conservation (DOC), Division of Mines and Geology (DMG) to delineate Seismic Hazard Zones. The purpose of the Act is to reduce the threat to public health and safety and to minimize the loss of life and property by identifying and mitigating seismic hazards. Cities, counties, and state agencies are directed to use seismic hazard zone maps prepared by DMG in their land-use planning and permitting processes. The Act requires that site-specific geotechnical investigations be performed prior to permitting most urban development projects within the hazard zones. Evaluation and mitigation of seismic hazards are to be conducted under guidelines established by the California State Mining and Geology Board (DOC, 1997; also available on the Internet at <http://gmw.consrv.ca.gov/shmp/webdocs/sp117.pdf>).

This section of the evaluation report summarizes seismic hazard zone mapping for earthquake-induced landslides in the Newhall 7.5-minute Quadrangle. This section, along with Section 1 (addressing liquefaction), and Section 3 (addressing earthquake shaking), form a report that is one of a series that summarizes the preparation of seismic hazard zone maps within the state (Smith, 1996). Additional information on seismic hazard zone mapping in California can be accessed on DMG's Internet web page: <http://www.conservation.ca.gov/CGS/index.htm>

BACKGROUND

Landslides triggered by earthquakes historically have been a significant cause of earthquake damage. In California, large earthquakes such as the 1971 San Fernando, 1989 Loma Prieta, and 1994 Northridge earthquakes triggered landslides that were responsible for destroying or damaging numerous structures, blocking major transportation corridors, and damaging life-line infrastructure. Areas that are most susceptible to earthquake-induced landslides are steep slopes in poorly cemented or highly fractured rocks, areas underlain by loose, weak soils, and areas on or adjacent to existing landslide deposits. These geologic and terrain conditions exist in many parts of California, including numerous hillside areas that have already been developed or are likely to be developed in the future. The opportunity for strong earthquake ground shaking is high in many parts of California because of the presence of numerous active faults. The combination of these factors constitutes a significant seismic hazard throughout much of California, including the hillside areas of the Newhall Quadrangle.

METHODS SUMMARY

The mapping of earthquake-induced landslide hazard zones presented in this report is based on the best available terrain, geologic, geotechnical, and seismological data. If unavailable or significantly outdated, new forms of these data were compiled or generated specifically for this project. The following were collected or generated for this evaluation:

- Digital terrain data were used to provide an up-to-date representation of slope gradient and slope aspect in the study area
- Geologic mapping was used to provide an accurate representation of the spatial distribution of geologic materials in the study area. In addition, a map of existing landslides, whether triggered by earthquakes or not, was prepared
- Geotechnical laboratory test data were collected and statistically analyzed to quantitatively characterize the strength properties and dynamic slope stability of geologic materials in the study area
- Seismological data in the form of DMG probabilistic shaking maps and catalogs of strong-motion records were used to characterize future earthquake shaking within the mapped area

The data collected for this evaluation were processed into a series of GIS layers using commercially available software. A slope stability analysis was performed using the Newmark method of analysis (Newmark, 1965), resulting in a map of landslide hazard potential. The earthquake-induced landslide hazard zone was derived from the landslide hazard potential map according to criteria developed in a DMG pilot study (McCrink and Real, 1996) and adopted by the State Mining and Geology Board (DOC, 2000).

SCOPE AND LIMITATIONS

The methodology used to make this map is based on earthquake ground-shaking estimates, geologic material-strength characteristics and slope gradient. These data are gathered from a variety of outside sources. Although the selection of data used in this evaluation was rigorous, the quality of the data is variable. The State of California and the Department of Conservation make no representations or warranties regarding the accuracy of the data gathered from outside sources.

Earthquake-induced landslide zone maps are intended to prompt more detailed, site-specific geotechnical investigations as required by the Act. As such, these zone maps identify areas where the potential for earthquake-induced landslides is relatively high. Due to limitations in methodology, it should be noted that these zone maps do not necessarily capture all potential earthquake-induced landslide hazards. Earthquake-induced ground failures that are not addressed by this map include those associated with ridge-top spreading and shattered ridges. It should also be noted that no attempt has been made to map potential run-out areas of triggered landslides. It is possible that such run-out areas may extend beyond the zone boundaries. The potential for ground failure resulting from liquefaction-induced lateral spreading of alluvial materials, considered by some to be a form of landsliding, is not specifically addressed by the earthquake-induced landslide zone or this report. See Section 1, Liquefaction Evaluation Report for the Newhall Quadrangle, for more information on the delineation of liquefaction zones.

The remainder of this report describes in more detail the mapping data and processes used to prepare the earthquake-induced landslide zone map for the Newhall Quadrangle. The information is presented in two parts. Part I covers physiographic, geologic and engineering geologic conditions in the study area. Part II covers the preparation of landslide hazard potential and landslide zone maps.

PART I

PHYSIOGRAPHY

Study Area Location and Physiography

The Newhall Quadrangle covers approximately 62 square miles of land in west-central Los Angeles County. The center of the quadrangle lies about 30 miles northwest of the

Los Angeles Civic Center. The City of Santa Clarita, which incorporates the communities of Newhall, Saugus, Valencia, and Canyon Country, covers the southeastern and east central parts of the quadrangle. The remainder of the area is comprised of unincorporated county land. A small part of the northeastern corner of the map lies within the Angeles National Forest. The primary transportation routes follow the valleys of the Santa Clara River and its tributaries. Access is provided from the north and the south via Interstate Highway 5, from the east via Soledad Canyon Road and Bouquet Canyon Road, and from the west via State Highway 126.

A variety of mountainous and lowland terrains characterizes the physiography of the quadrangle. The deeply dissected, mountainous topography that separates the major canyons includes: in the southwest quarter, portions of the northern Santa Susana Mountains; in the southeastern corner, a small northwesternmost extension of the San Gabriel Mountains; and, north of the Santa Clara River Valley is a region of rugged, chaparral-covered rocky terrain.

The Santa Clara River flows across the center of the quadrangle from east to west. Major tributaries include: the South Fork of the Santa Clara River along with its branches, Newhall Creek and Placerita Creek, which joins the main stream near Bouquet Junction; Castaic Creek, which joins the river near Castaic Junction; and the unnamed streams that flow southward into the Santa Clara River from Bouquet, Dry, and San Francisquito canyons.

Residential and commercial development has replaced agricultural and grazing land uses within the area in recent decades. Modern development is characterized by mass grading of the hillside areas at a large scale, especially north of the Santa Clara River and west of Interstate 5. The remainder of the area is largely unoccupied, although oil fields, agricultural activities, small ranches, and parklands are scattered across the quadrangle.

Digital Terrain Data

The calculation of slope gradient is an essential part of the evaluation of slope stability under earthquake conditions. An accurate slope gradient calculation begins with an up-to-date map representation of the earth's surface. Within the Newhall Quadrangle, a Level 2 digital elevation model (DEM) was obtained from the USGS (U.S. Geological Survey, 1993). This DEM, which was prepared from the topographic contours constructed in 1952 for the 7.5-minute quadrangle map, has a 10-m horizontal resolution and a 7.5-m vertical accuracy.

To update the terrain data, areas that have recently undergone large-scale grading in the hilly portions of the Newhall Quadrangle were identified on aerial photography flown in the winter and spring of 1994 (see Plate 2.1). Terrain data for these areas were obtained from an airborne interferometric radar (TOPSAR) DEM flown and processed in August 1994 by NASA's Jet Propulsion Laboratory (JPL), and reprocessed by Calgis, Inc. (GeoSAR Consortium, 1995 and 1996). These terrain data were also smoothed prior to analysis. This corrected terrain data was digitally merged with the USGS DEM.

A slope map was made from the corrected DEM using a third-order, finite difference, center-weighted algorithm (Horn, 1981). The original USGS DEM was then used to make a slope-aspect map. The manner in which the slope and aspect maps were used to prepare the zone map will be described in subsequent sections of this report.

GEOLOGY

Bedrock and Surficial Geology

For the Newhall Quadrangle, a recently compiled geologic map was obtained from the U.S. Geological Survey (USGS) in digital form (Yerkes and Campbell, 1995). This map was modified to reflect the most recent mapping in the area and landslide deposits were deleted from the map so that the distribution of bedrock formations and the landslide inventory would exist on separate layers for the hazard analysis. In the field, observations were made of exposures, aspects of weathering, and general surface expression of the geologic units. In addition, the relation of the various geologic units to development and abundance of slope failures was noted.

The oldest geologic unit mapped is the upper Miocene Mint Canyon Formation (map symbol Tmc, Yerkes and Campbell, 1995), which crops out mainly in the northeastern corner of the map area. The nonmarine Mint Canyon Formation consists of well-bedded interlayered conglomeratic sandstone, claystone, and siltstone of fluvial and lacustrine (Tmcl) origin. Overlying the Mint Canyon Formation in the northeast corner of the map area is the upper Miocene Castaic Formation (Tcs), which consists of shallow marine sandstone and shale distinguishable by the large variety of mollusk species from the upper Miocene. Coevally deposited with the Castaic Formation, the upper Miocene to lower Pliocene Towsley Formation (Tws and Twc), consisting of interbedded marine siltstone, sandstone, and conglomerate, crops out in the southwestern corner of the map area.

Plio-Pleistocene rock units in the Newhall Quadrangle include the Pico and Saugus formations. The Pico Formation consists of marine siltstone, sandstone, and pebbly sandstone (Qtp, Qtps, and Qtpc), and is exposed in the southwest corner of the map area. The Saugus Formation, which is the dominant rock unit exposed in the area, overlies the Pico Formation and is composed of interbedded nonmarine sandstone, siltstone, and pebble-cobble conglomerate (Qs). In the northern half of the map area, the Saugus Formation has been divided into subunits wherein conglomerate beds contain either clasts of Mesozoic-age (?) Pelona Schist (Qsp) or clasts of shale from the Paleocene San Francisquito Formation (Qss).

Older Quaternary deposits such as older fan conglomerate (Qfo), older terrace deposits (Qto), Pacoima Formation (Qpa), and terrace deposits (Qt) consist of poorly consolidated interbeds of sand, silt, and gravel. Terrace deposits unconformably overlie the Saugus Formation in the southern half of the map, and are the second most widespread unit (excluding younger alluvium) in the quadrangle.

Younger Quaternary surficial deposits cover the floor and margins of the valley formed by the Santa Clara River and extend up into the canyons in the surrounding hills and mountains. They consist of slope wash (Qsw), landslide deposits (Qls), older alluvium (Qao), pond deposits (Ql), and younger alluvium (Qal, Qal1, and Qal2). Modern man-made fill (af) is also mapped in some areas. A more detailed discussion of the Quaternary deposits in the Newhall Quadrangle can be found in Section 1.

Structural Geology

The San Gabriel Fault, which transects the Newhall Quadrangle from northwest to southeast, is the dominant regional structure in the area. Most faults and fold axes, as well as the strike of bedding of the pre-Quaternary rock units, trend subparallel to the strike of the San Gabriel Fault. Steeply dipping bedrock ($> 45^\circ$) exists primarily in the southwest corner of the map and adjacent to the San Gabriel Fault zone.

Landslide Inventory

As a part of the geologic data compilation, an inventory of existing landslides in the Newhall Quadrangle was prepared by field reconnaissance, analysis of stereo-paired aerial photographs (see Air Photos in References) and from previous work (Treiman, 1986; 1987). All landslides shown on the digital geologic map (Yerkes and Campbell, 1995) were verified or re-mapped during preparation of the inventory maps. Landslides were mapped and digitized at a scale of 1:24,000. For each landslide included on the map a number of characteristics (attributes) were compiled. These characteristics include the confidence of interpretation (definite, probable and questionable) and other properties, such as activity, thickness, and associated geologic unit(s). Landslides rated as definite and probable were carried into the slope stability analysis. Landslides rated as questionable were not carried into the slope stability analysis due to the uncertainty of their existence. The completed hand-drawn landslide map was scanned, digitized, and the attributes were compiled in a database. A version of this landslide inventory is included with Plate 2.1.

ENGINEERING GEOLOGY

Geologic Material Strength

To evaluate the stability of geologic materials under earthquake conditions, the geologic map units described above were ranked and grouped on the basis of their shear strength. Generally, the primary source for rock shear-strength measurements is geotechnical reports prepared by consultants on file with local government permitting departments. Geotechnical and engineering geologic reports contained in Environmental Impact Reports and Hospital Review Project files at DMG are additional sources. Shear-strength data for the rock units identified on the Newhall Quadrangle geologic map were obtained from a variety of sources (see Appendix A). Where shear strength information was lacking for certain rock units within the Newhall Quadrangle itself, it was collected from adjacent areas. The locations of rock and soil samples taken for shear testing are shown on Plate 2.1.

Shear strength data gathered from the above sources were compiled for each geologic map unit. Geologic units were grouped on the basis of average angle of internal friction (average phi) and lithologic character. Average (mean and median) phi values for each geologic map unit and corresponding strength group are summarized in Table 2.1. For most of the geologic strength groups in the map area, a single shear strength value was assigned and used in our slope stability analysis. A geologic material strength map was made based on the groupings presented in Tables 2.1 and 2.2, and this map provides a spatial representation of material strength for use in the slope stability analysis.

Adverse Bedding Conditions

Adverse bedding conditions are an important consideration in slope stability analyses. Adverse bedding conditions occur where the dip direction of bedded sedimentary rocks is roughly the same as the slope aspect, and where the dip magnitude is less than the slope gradient. Under these conditions, landslides can slip along bedding surfaces due to a lack of lateral support.

To account for adverse bedding in our slope stability evaluation, we used geologic structural data in combination with digital terrain data to identify areas with potentially adverse bedding, using methods similar to those of Brabb (1983). The structural data were used in combination with digital terrain data to identify areas with potentially adverse bedding, using methods similar to those of Brabb (1983). The structural data, derived from the geologic map database, was used to categorize areas of common bedding dip direction and magnitude. The dip direction was then compared to the slope aspect and, if the same, the dip magnitude and slope gradient categories were compared. If the dip magnitude was less than or equal to the slope gradient category but greater than 25% (4:1 slope), the area was marked as a potential adverse bedding area.

The formations, which contain interbedded sandstone and shale, were subdivided based on shear strength differences between coarse-grained (higher strength) and fine-grained (lower strength) lithologies. Shear strength values for the fine- and coarse-grained lithologies were then applied to areas of favorable and adverse bedding orientation, which were determined from structural and terrain data as discussed above. It was assumed that coarse-grained material (higher strength) dominates where bedding dips into a slope (favorable bedding) while fine-grained (lower strength) material dominates where bedding dips out of a slope (adverse bedding). The geologic material strength map was modified by assigning the lower, fine-grained shear strength values to areas where potential adverse bedding conditions were identified. The favorable and adverse bedding shear strength parameters for the formations are included in Table 2.1.

Existing Landslides

The strength characteristics of existing landslides (QIs) must be based on tests of the materials along the landslide slip surface. Ideally, shear tests of slip surfaces formed in each mapped geologic unit would be used. However, this amount of information is rarely available, and for the preparation of the earthquake-induced landslide zone map it has been assumed that all landslides within the quadrangle have the same slip surface

strength parameters. We collect and use primarily “residual” strength parameters from laboratory tests of slip surface materials tested in direct shear or ring shear test equipment. Back-calculated strength parameters, if the calculations appear to have been performed appropriately, have also been used.

NEWHALL QUADRANGLE SHEAR STRENGTH GROUPS							
	Formation Name	Number Tests	Mean/Median Phi (deg)	Mean/Median Group Phi (deg)	Mean/Median Group C (psf)	No Data: Similar Lithology	Phi Values Used in Stability Analyses
GROUP 1	Tm c(fbc)*	8	34/34	36/37	360/310	Tws (fbc)* Tm cl(fbc) Tw c(fbc)	36
	Tcs(fbc)	7	39/40				
GROUP 2	QTp(fbc)*	4	32/33	31/31	360/300	QTps (fbc) QTpc(fbc) Qsp(fbc) Qss(fbc) Qfo, Qto Qpa, Qsw Qal1, Qal2	31
	Qs(fbc)*	61	31/32				
	Qt	25	32/34				
	Qao	9	30/31				
	Qal	56	30/30				
	af	9	31/28				
GROUP 3	Tm c(abc)*	13	27/28	28/28	680/600	Tm cl(abc) Tw c(abc) QTps(abc) Qsp(abc) Qss(abc)	28
	Tcs(abc)	6	30/31				
	Tws(abc)*	1	29/29				
	QTp(abc)*	3	28/28				
	Qs(abc)*	6	30/29				
GROUP 4	Qls	7	25/25	25/25	250/250		18**
<p>abc = adverse bedding condition, fine-grained material strength fbc = favorable bedding condition, coarse-grained material strength * subunits of these formations have been combined ** lowest calculated phi value was accepted as representative phi value for landslides</p>							

Table 2.1. Summary of the Shear Strength Statistics for the Newhall Quadrangle.

SHEAR STRENGTH GROUPS FOR THE NEWHALL QUADRANGLE			
GROUP 1	GROUP 2	GROUP 3	GROUP 4
Tcs(fbc)	QTp(fbc)	Tcs(abc)	Qls
Tmc(fbc)	QTps(fbc)	Tmc(abc)	
Tmcl(fbc)	QTpc(fbc)	Tmcl(abc)	
Tws(fbc)	Qs(fbc)	Tws(abc)	
Twc(fbc)	Qsp(fbc)	Twc(abc)	
	Qss(fbc)	QTp(abc)	
	Qfo	QTps(abc)	
	Qto	QTpc(abc)	
	Qpa	Qs(abc)	
	Qt	Qsp(abc)	
	Qao	Qss(abc)	
	Qsw		
	Qal		
	Qal1		
	Qal2		
	af		

Table 2.2. Summary of the Shear Strength Groups for the Newhall Quadrangle.

PART II

EARTHQUAKE-INDUCED LANDSLIDE HAZARD POTENTIAL

Design Strong-Motion Record

To evaluate earthquake-induced landslide hazard potential in the study area, a method of dynamic slope stability analysis developed by Newmark (1965) was used. The Newmark method analyzes dynamic slope stability by calculating the cumulative down-slope displacement for a given earthquake strong-motion time history. As implemented for the preparation of earthquake-induced landslide zones, the Newmark method necessitates the selection of a design earthquake strong-motion record to provide the “ground shaking opportunity.” For the Newhall Quadrangle, selection of a strong motion record was based on an estimation of probabilistic ground motion parameters for modal magnitude, modal distance, and peak ground acceleration (PGA). The parameters were estimated from maps prepared by DMG for a 10% probability of being exceeded in 50 years (Petersen and others, 1996). The parameters used in the record selection are:

Modal Magnitude:	6.6 to 7.7
Modal Distance:	2.5 to 22.0 km
PGA:	0.5 to 1.0 g

The strong-motion record selected for the slope stability analysis in the Newhall Quadrangle was the USC-14 record (Trifunac and others, 1994) from the magnitude 6.7 Northridge earthquake of January 17, 1994. This record had a source to recording site distance of 8.5 km and a peak ground acceleration (PGA) of 0.59g. The selected strong-motion record was not scaled or otherwise modified prior to its use in the analysis.

Displacement Calculation

The design strong-motion record was used to develop a relationship between landslide displacement and yield acceleration (a_y), defined as the earthquake horizontal ground acceleration above which landslide displacements take place. This relationship was prepared by integrating the design strong-motion record twice for a given acceleration value to find the corresponding displacement, and the process was repeated for a range of acceleration values (Jibson, 1993). The resulting curve in Figure 2.1 represents the full spectrum of displacements that can be expected for the design strong-motion record. This curve provides the required link between anticipated earthquake shaking and

estimates of displacement for different combinations of geologic materials and slope gradient, as described in the Slope Stability Analysis section below.

The amount of displacement predicted by the Newmark analysis provides an indication of the relative amount of damage that could be caused by earthquake-induced landsliding. Displacements of 30, 15 and 5 cm were used as criteria for rating levels of earthquake-induced landslide hazard potential based on the work of Youd (1980), Wilson and Keefer (1983), and a DMG pilot study for earthquake-induced landslides (McCrink and Real, 1996). Applied to the curve in Figure 2.1, these displacements correspond to yield accelerations of 0.076, 0.129 and 0.232 g. Because these yield acceleration values are derived from the design strong-motion record, they represent the ground shaking opportunity thresholds that are significant in the Newhall Quadrangle.

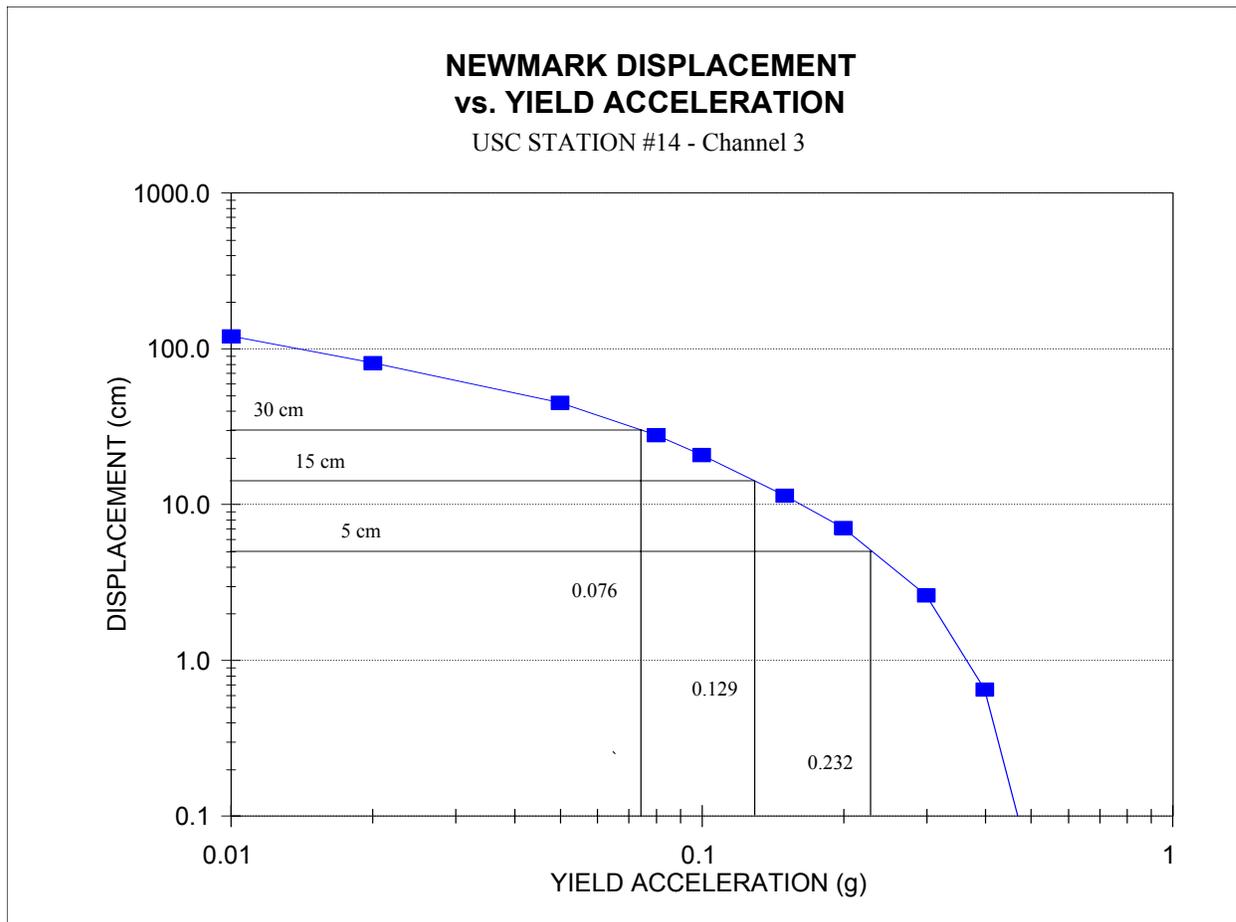


Figure 2.1. Yield Acceleration vs. Newmark Displacement for the USC Station # 14 Strong-Motion Record From the 17 January 1994 Northridge, California Earthquake.

Slope Stability Analysis

A slope stability analysis was performed for each geologic material strength group at slope increments of 1 degree. An infinite-slope failure model under unsaturated slope conditions was assumed. A factor of safety was calculated first, followed by the calculation of yield acceleration from Newmark's equation:

$$a_y = (FS - 1)g \sin \alpha$$

where FS is the Factor of Safety, g is the acceleration due to gravity, and α is the direction of movement of the slide mass, in degrees measured from the horizontal, when displacement is initiated (Newmark, 1965). For an infinite slope failure α is the same as the slope angle.

The yield accelerations resulting from Newmark's equations represent the susceptibility to earthquake-induced failure of each geologic material strength group for a range of slope gradients. Based on the relationship between yield acceleration and Newmark displacement shown in Figure 2.1, hazard potentials were assigned as follows:

1. If the calculated yield acceleration was less than 0.076g, Newmark displacement greater than 30 cm is indicated, and a HIGH hazard potential was assigned (H on Table 2.3)
2. If the calculated yield acceleration fell between 0.076g and 0.129g, Newmark displacement between 15 cm and 30 cm is indicated, and a MODERATE hazard potential was assigned (M on Table 2.3)
3. If the calculated yield acceleration fell between 0.129g and 0.232g, Newmark displacement between 5 cm and 15 cm is indicated, and a LOW hazard potential was assigned (L on Table 2.3)
4. If the calculated yield acceleration was greater than 0.232g, Newmark displacement of less than 5 cm is indicated, and a VERY LOW potential was assigned (VL on Table 2.3)

Table 2.3 summarizes the results of the stability analyses. The earthquake-induced landslide hazard potential map was prepared by combining the geologic material-strength map and the slope map according to this table.

NEWHALL QUADRANGLE HAZARD POTENTIAL MATRIX									
SLOPE CATEGORY									
Geologic Material Group	MEAN PHI	I	II	III	IV	V	VI	VII	percent
		0-18	19-29	30-35	36-45	46-51	52-63	> 63	
1	36	VL	VL	VL	VL	L	M	H	
2	31	VL	VL	VL	L	M	H	H	
3	28	VL	VL	L	M	H	H	H	
4	18	L	H	H	H	H	H	H	

Table 2.3. Hazard Potential Matrix for Earthquake-Induced Landslides in the Newhall Quadrangle. Shaded area indicates hazard potential levels included within the hazard zone. H = High, M = Moderate, L = Low, VL = Very Low.

EARTHQUAKE-INDUCED LANDSLIDE HAZARD ZONE

Criteria for Zoning

Earthquake-induced landslide zones were delineated using criteria adopted by the California State Mining and Geology Board (DOC, 2000). Under these criteria, earthquake-induced landslide hazard zones are defined as areas that meet one or both of the following conditions:

1. Areas that have been identified as having experienced landslide movement in the past, including all mappable landslide deposits and source areas as well as any landslide that is known to have been triggered by historic earthquake activity.
2. Areas where the geologic and geotechnical data and analyses indicate that the earth materials may be susceptible to earthquake-induced slope failure.

These conditions are discussed in further detail in the following sections.

Existing Landslides

Existing landslides typically consist of disrupted soils and rock materials that are generally weaker than adjacent undisturbed rock and soil materials. Previous studies

indicate that existing landslides can be reactivated by earthquake movements (Keefer, 1984). Earthquake-triggered movement of existing landslides is most pronounced in steep head scarp areas and at the toe of existing landslide deposits. Although reactivation of deep-seated landslide deposits is less common (Keefer, 1984), a significant number of deep-seated landslide movements have occurred during, or soon after, several recent earthquakes. Based on these observations, all existing landslides with a definite or probable confidence rating are included within the earthquake-induced landslide hazard zone.

The February 9, 1971 San Fernando earthquake likely triggered numerous rockfalls and debris falls in the portion of the San Gabriel Mountains that extends into the southeastern corner of the Newhall Quadrangle (Evans, 1975). These shallow failures were only referred to in general descriptions of the effects of the event and have not been delineated on any maps. The 1994 Northridge earthquake also caused a number of relatively small, shallow slope failures in the Newhall Quadrangle (Harp and Jibson, 1995). Landslides attributed to the Northridge earthquake covered approximately 135 acres of land in the quadrangle, which is less than 1/2 of 1 percent of the total area covered by the map. Of the area covered by these Northridge earthquake landslides, 90% falls within the area of the hazard zone based on a computer comparison of the zone map and the Harp and Jibson (1995) inventory.

Geologic and Geotechnical Analysis

Based on the conclusions of a pilot study performed by DMG (McCrink and Real, 1996), it has been concluded that earthquake-induced landslide hazard zones should encompass all areas that have a High, Moderate or Low level of hazard potential (see Table 2.3). This would include all areas where the analyses indicate earthquake displacements of 5 centimeters or greater. Areas with a Very Low hazard potential, indicating less than 5 centimeters displacement, are excluded from the zone.

As summarized in Table 2.3, all areas characterized by the following geologic strength group and slope gradient conditions are included in the earthquake-induced landslide hazard zone:

1. Geologic Strength Group 4 is included for all slope gradient categories. (Note: Geologic Strength Group 4 includes all mappable landslides with a definite or probable confidence rating).
2. Geologic Strength Group 3 is included for all slopes steeper than 29 percent.
3. Geologic Strength Group 2 is included for all slopes steeper than 35 percent.
4. Geologic Strength Group 1 is included for all slopes steeper than 45 percent.

This results in 26 percent of the quadrangle lying within the earthquake-induced landslide hazard zone for the Newhall Quadrangle.

ACKNOWLEDGMENTS

The authors would like to thank the following individuals and organizations for their assistance in obtaining the data necessary to complete this project. Geologic material strength data were collected at the Los Angeles County Department of Public Works with the assistance of Robert Larsen, James Shuttleworth, Charles Nestle, and Dave Poplar. Digital terrain data and assistance were provided by Randy Jibson of the U.S. Geological Survey (USGS DEM), and Scott Hensley of JPL and Gerald Dildine and Chris Bohain of Calgis, Inc. (Radar DEM). Technical review of the methodology was provided by Bruce Clark, Randy Jibson, Robert Larsen, Scott Lindvall, and J. David Rogers, who are members of the State Mining and Geology Board's Seismic Hazards Mapping Act Advisory Committee Landslides Working Group. At DMG, special thanks to Bob Moskovitz, Teri McGuire, Scott Shepherd, and Barbara Wanish for their Geographic Information System operations support, and to Joy Arthur for designing and plotting the graphic displays associated with the hazard zone map and this report.

REFERENCES

- Brabb, E.E., 1983, Map showing direction and amount of bedding dip of sedimentary rocks in San Mateo County, California: U.S. Geological Survey Miscellaneous Investigations Series Map I-1257C, 1 sheet, scale 1:62,500.
- California Department of Conservation, Division of Mines and Geology, 1997, Guidelines for evaluating and mitigating seismic hazards in California: California Department of Conservation, Division of Mines and Geology, Special Publication 117, 74 p.
- California Department of Conservation, Division of Mines and Geology, 2000, Recommended criteria for delineating seismic hazard zones: California Department of Conservation, Division of Mines and Geology, Special Publication 118, 12 p.
- Evans, J.R., 1975, Geologic Effects of the San Fernando earthquake in the Newhall-Saugus-Valencia-Solemint Area, *in* Oakeshott, G.B., *editor*, San Fernando earthquake of 9 February, 1971: California Division of Mines and Geology Bulletin 196, p. 137-144.
- GeoSAR Consortium, 1995, Year 1: Research and development status report for GeoSAR, a radar-based terrain mapping project: U.S. Government's Advanced Research Projects Agency Contract Order No. B335/00, 135 p.
- GeoSAR Consortium, 1996, Year 2: Research and development status report for GeoSAR, a radar-based terrain mapping project: U.S. Government's Advanced Research Projects Agency Contract Order No. B378/00, 70 p.

- Harp, E.L. and Jibson, R.W., 1995, Landslides triggered by the January 17, 1994 Northridge, California earthquake: U.S. Geological Survey Open-File Report 95-213, 17 p., Plate 1 scale 1:100,000; Plate 2 scale 1:50,000.
- Horn, B.K.P., 1981, Hill shading and the reflectance map: Proceedings of the IEEE, v. 69, no. 1, p. 14-47.
- Jibson, R.W., 1993, Predicting earthquake-induced landslide displacements using Newmark's sliding block analysis: Transportation Research Board, National Research Council, Transportation Research Record 1411, 17 p.
- Keefer, D.K., 1984, Landslides caused by earthquakes: Geological Society of America Bulletin, v. 95, no. 4, p. 406-421.
- McCrink, T.P. and Real, C.R., 1996, Evaluation of the Newmark method for mapping earthquake-induced landslide hazards in the Laurel 7-1/2 minute Quadrangle, Santa Cruz County, California: California Division of Mines and Geology Final Technical Report for U.S. Geological Survey Contract 143-93-G-2334, U.S. Geological Survey, Reston, Virginia, 31 p.
- Newmark, N.M., 1965, Effects of earthquakes on dams and embankments: Geotechnique, v. 15, no. 2, p. 139-160.
- Petersen, M.D., Bryant, W.A., Cramer, C.H., Cao, T., Reichle, M.S., Frankel, A.D., Lienkaemper, J.J., McCrory, P.A. and Schwartz, D.P., 1996, Probabilistic seismic hazard assessment for the State of California: California Department of Conservation, Division of Mines and Geology, Open File Report 96-08; U.S. Geological Survey Open File Report 96-706, 33 p.
- Smith, T.C., 1996, Preliminary maps of seismic hazard zones and draft guidelines for evaluating and mitigating seismic hazards: California Geology, v. 49, no. 6, p. 147-150.
- Treiman, J.A., 1986, Landslide hazards in the west half of the Newhall Quadrangle, Los Angeles County, California: California Department of Conservation, Division of Mines and Geology Open-File Report 86-6, scale 1:24,000.
- Treiman, J.A., 1987, Landslide hazards in the east half of the Newhall Quadrangle, Los Angeles County, California: California Department of Conservation, Division of Mines and Geology Open-File Report 86-16, scale 1:24,000.
- Trifunac, M.D., Todorovska, M.I. and Ivanovic, S.S., 1994, A note on distribution of uncorrected peak ground accelerations during the Northridge, California earthquake of 17 January 1994: Soil Dynamics and Earthquake Engineering, v. 13, no. 3, p. 187-196.
- U.S. Geological Survey, 1993, Digital Elevation Models: National Mapping Program, Technical Instructions, Data Users Guide 5, 48 p.

- Wilson, R.C. and Keefer, D.K., 1983, Dynamic analysis of a slope failure from the 1979 Coyote Lake, California, earthquake: Bulletin of the Seismological Society of America, v. 73, p. 863-877.
- Yerkes, R.F. and Campbell, R.H., 1995, Preliminary geologic map of the Newhall 7.5' Quadrangle, Southern California: U.S. Geological Survey Open File Report 95-503. Scale 1:24,000.
- Youd, T.L., 1980, Ground failure displacement and earthquake damage to buildings: American Society of Civil Engineers Conference on Civil Engineering and Nuclear Power, 2d, Knoxville, Tennessee, 1980, v. 2, p. 7-6-2 to 7-6-26.

AIR PHOTOS

- National Aeronautics and Space Administration (NASA) 04689, Flight 94-002-02, January 22, 1994, Frames 795-807, 793-785, 692-704, 674-686, 586-598, 497-509, 388-490, and 394-406, black and white, vertical, approx. scale 1:15,000.
- United States Department of Agriculture (USDA), dated 11-4-52, Flight or Serial number AXJ, Photo numbers 3K-96-102, 3K-24-28, 2K-135-145, 2K-81-82, 2K-91-95, 3K-148-155, 2K-83-90.
- United States Department of Agriculture (USDA), dated 6-19-80, Flight or Serial number 80136, Photo numbers 36-51, 58-60, 61-86, 87-102, 103-113, 117-135, 146-156, 136-144, 157-177, 178-191, 198-216, scale 1:18,000.

APPENDIX A SOURCE OF ROCK STRENGTH DATA

SOURCE	NUMBER OF TESTS SELECTED
Los Angeles County Department of Public Works	166
Geotechnical reports from environmental impact documents on file at DMG	49
Total Number of Shear Tests	215

SECTION 3

GROUND SHAKING EVALUATION REPORT

Potential Ground Shaking in the Newhall 7.5-Minute Quadrangle, Los Angeles County, California

By

**Mark D. Petersen*, Chris H. Cramer*, Geoffrey A. Faneros,
Charles R. Real, and Michael S. Reichle**

**California Department of Conservation
Division of Mines and Geology**

***Formerly with DMG, now with U.S. Geological Survey**

PURPOSE

The Seismic Hazards Mapping Act (the Act) of 1990 (Public Resources Code, Chapter 7.8, Division 2) directs the California Department of Conservation (DOC), Division of Mines and Geology (DMG) to delineate Seismic Hazard Zones. The purpose of the Act is to reduce the threat to public health and safety and to minimize the loss of life and property by identifying and mitigating seismic hazards. Cities, counties, and state agencies are directed to use the Seismic Hazard Zone Maps in their land-use planning and permitting processes. The Act requires that site-specific geotechnical investigations be performed prior to permitting most urban development projects within the hazard zones. Evaluation and mitigation of seismic hazards are to be conducted under guidelines established by the California State Mining and Geology Board (DOC, 1997; also available on the Internet at <http://gmw.consrv.ca.gov/shmp/webdocs/sp117.pdf>).

This section of the evaluation report summarizes the ground motions used to evaluate liquefaction and earthquake-induced landslide potential for zoning purposes. Included are ground motion and related maps, a brief overview on how these maps were prepared, precautionary notes concerning their use, and related references. The maps provided

herein are presented at a scale of approximately 1:150,000 (scale bar provided on maps), and show the full 7.5-minute quadrangle and portions of the adjacent eight quadrangles. They can be used to assist in the specification of earthquake loading conditions *for the analysis of ground failure* according to the "Simple Prescribed Parameter Value" method (SPPV) described in the site investigation guidelines (California Department of Conservation, 1997). Alternatively, they can be used as a basis for comparing levels of ground motion determined by other methods with the statewide standard.

This section and Sections 1 and 2 (addressing liquefaction and earthquake-induced landslide hazards) constitute a report series that summarizes development of seismic hazard zone maps in the state. Additional information on seismic hazard zone mapping in California can be accessed on DMG's Internet homepage:

<http://www.conservation.ca.gov/CGS/index.htm>

EARTHQUAKE HAZARD MODEL

The estimated ground shaking is derived from the statewide probabilistic seismic hazard evaluation released cooperatively by the California Department of Conservation, Division of Mines and Geology, and the U.S. Geological Survey (Petersen and others, 1996). That report documents an extensive 3-year effort to obtain consensus within the scientific community regarding fault parameters that characterize the seismic hazard in California. Fault sources included in the model were evaluated for long-term slip rate, maximum earthquake magnitude, and rupture geometry. These fault parameters, along with historical seismicity, were used to estimate return times of moderate to large earthquakes that contribute to the hazard.

The ground shaking levels are estimated for each of the sources included in the seismic source model using attenuation relations that relate earthquake shaking with magnitude, distance from the earthquake, and type of fault rupture (strike-slip, reverse, normal, or subduction). The published hazard evaluation of Petersen and others (1996) only considers uniform firm-rock site conditions. In this report, however, we extend the hazard analysis to include the hazard of exceeding peak horizontal ground acceleration (PGA) at 10% probability of exceedance in 50 years on spatially uniform conditions of rock, soft rock, and alluvium. These soil and rock conditions approximately correspond to site categories defined in Chapter 16 of the Uniform Building Code (ICBO, 1997), which are commonly found in California. We use the attenuation relations of Boore and others (1997), Campbell (1997), Sadigh and others (1997), and Youngs and others (1997) to calculate the ground motions.


The seismic hazard maps for ground shaking are produced by calculating the hazard at sites separated by about 5 km. Figures 3.1 through 3.3 show the hazard for PGA at 10% probability of exceedance in 50 years assuming the entire map area is firm rock, soft rock, or alluvial site conditions respectively. The sites where the hazard is calculated are represented as dots and ground motion contours as shaded regions. The quadrangle of interest is outlined by bold lines and centered on the map. Portions of the eight adjacent

NEWHALL 7.5 MINUTE QUADRANGLE AND PORTIONS OF ADJACENT QUADRANGLES

10% EXCEEDANCE IN 50 YEARS PEAK GROUND ACCELERATION (g)

1998

FIRM ROCK CONDITIONS

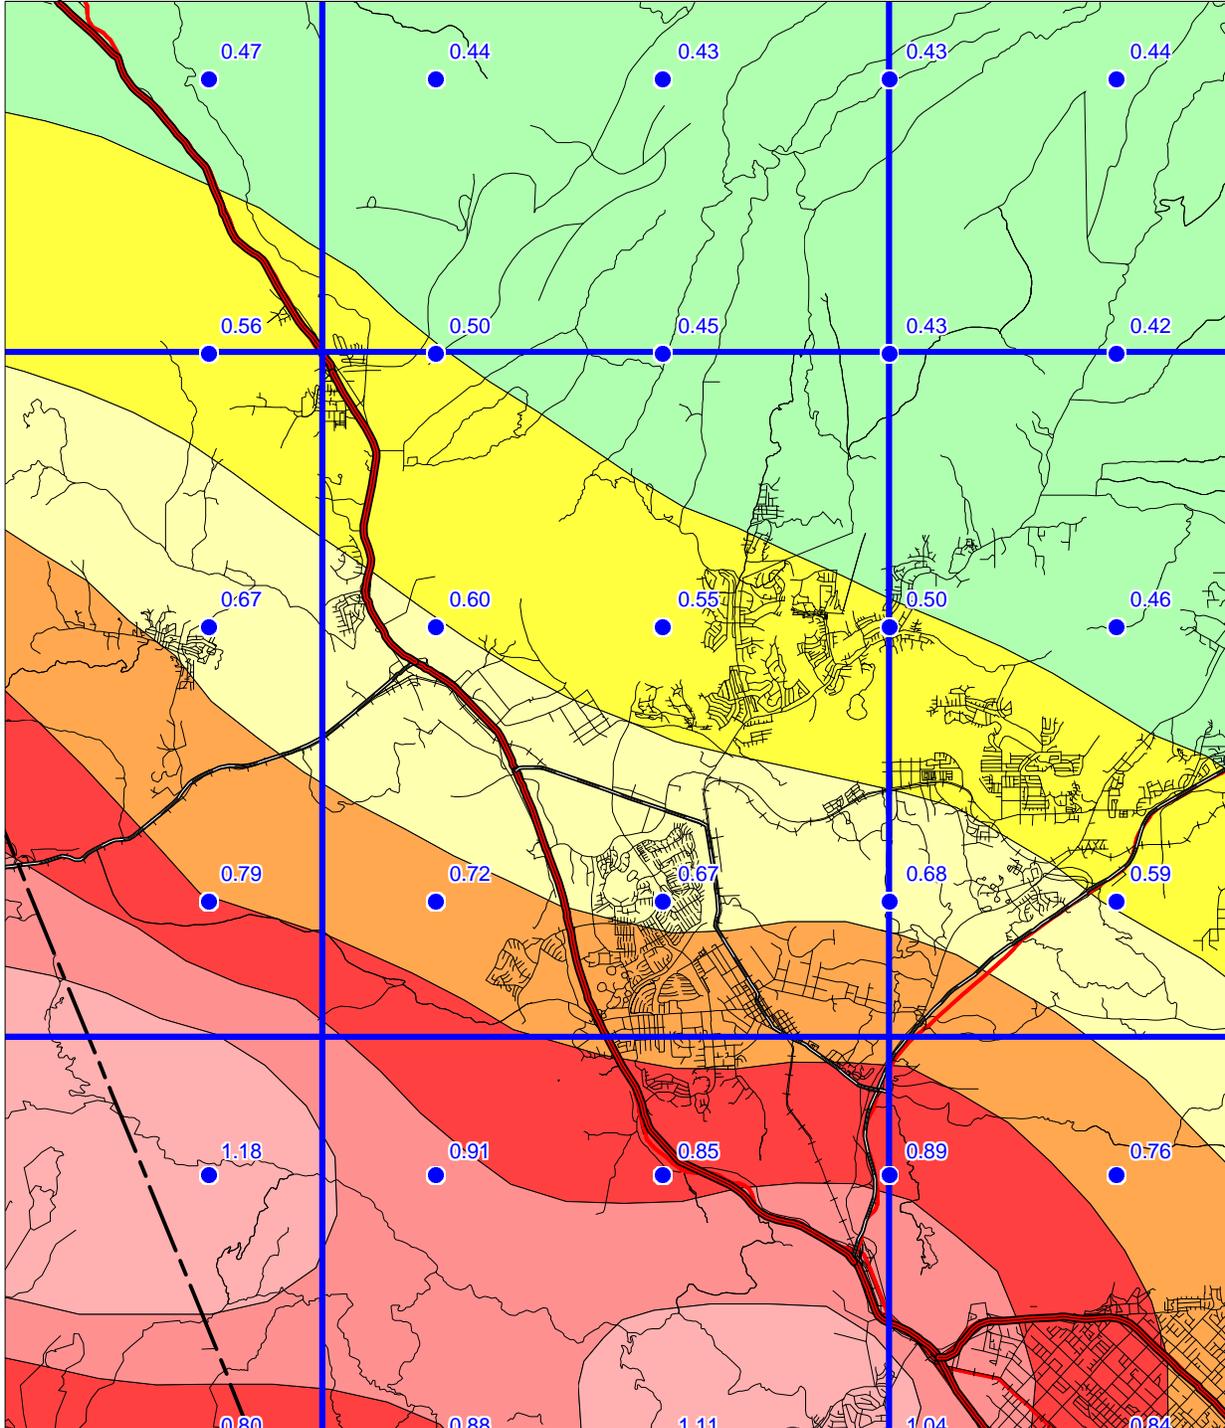

Base map modified from MapInfo StreetWorks ©1998 MapInfo Corporation



Department of Conservation
Division of Mines and Geology




Figure 3.1

NEWHALL 7.5 MINUTE QUADRANGLE AND PORTIONS OF ADJACENT QUADRANGLES


10% EXCEEDANCE IN 50 YEARS PEAK GROUND ACCELERATION (g)

1998

SOFT ROCK CONDITIONS

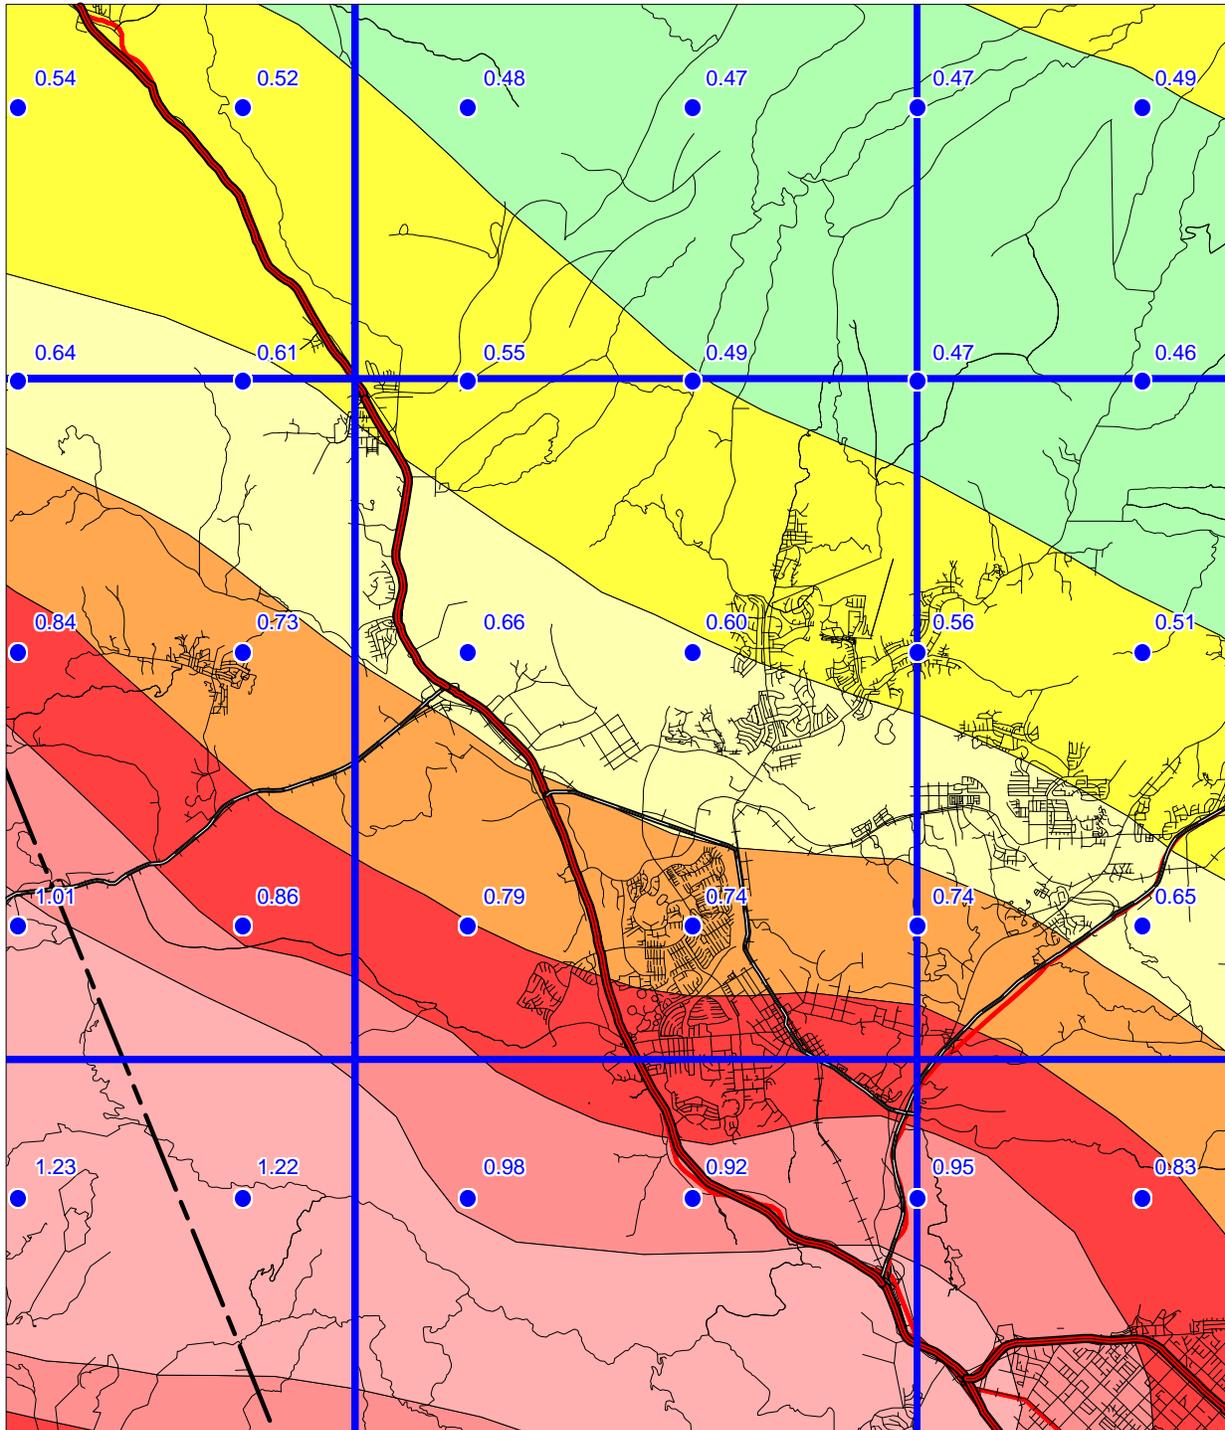

Base map modified from MapInfo StreetWorks © 1998 MapInfo Corporation



Department of Conservation
Division of Mines and Geology

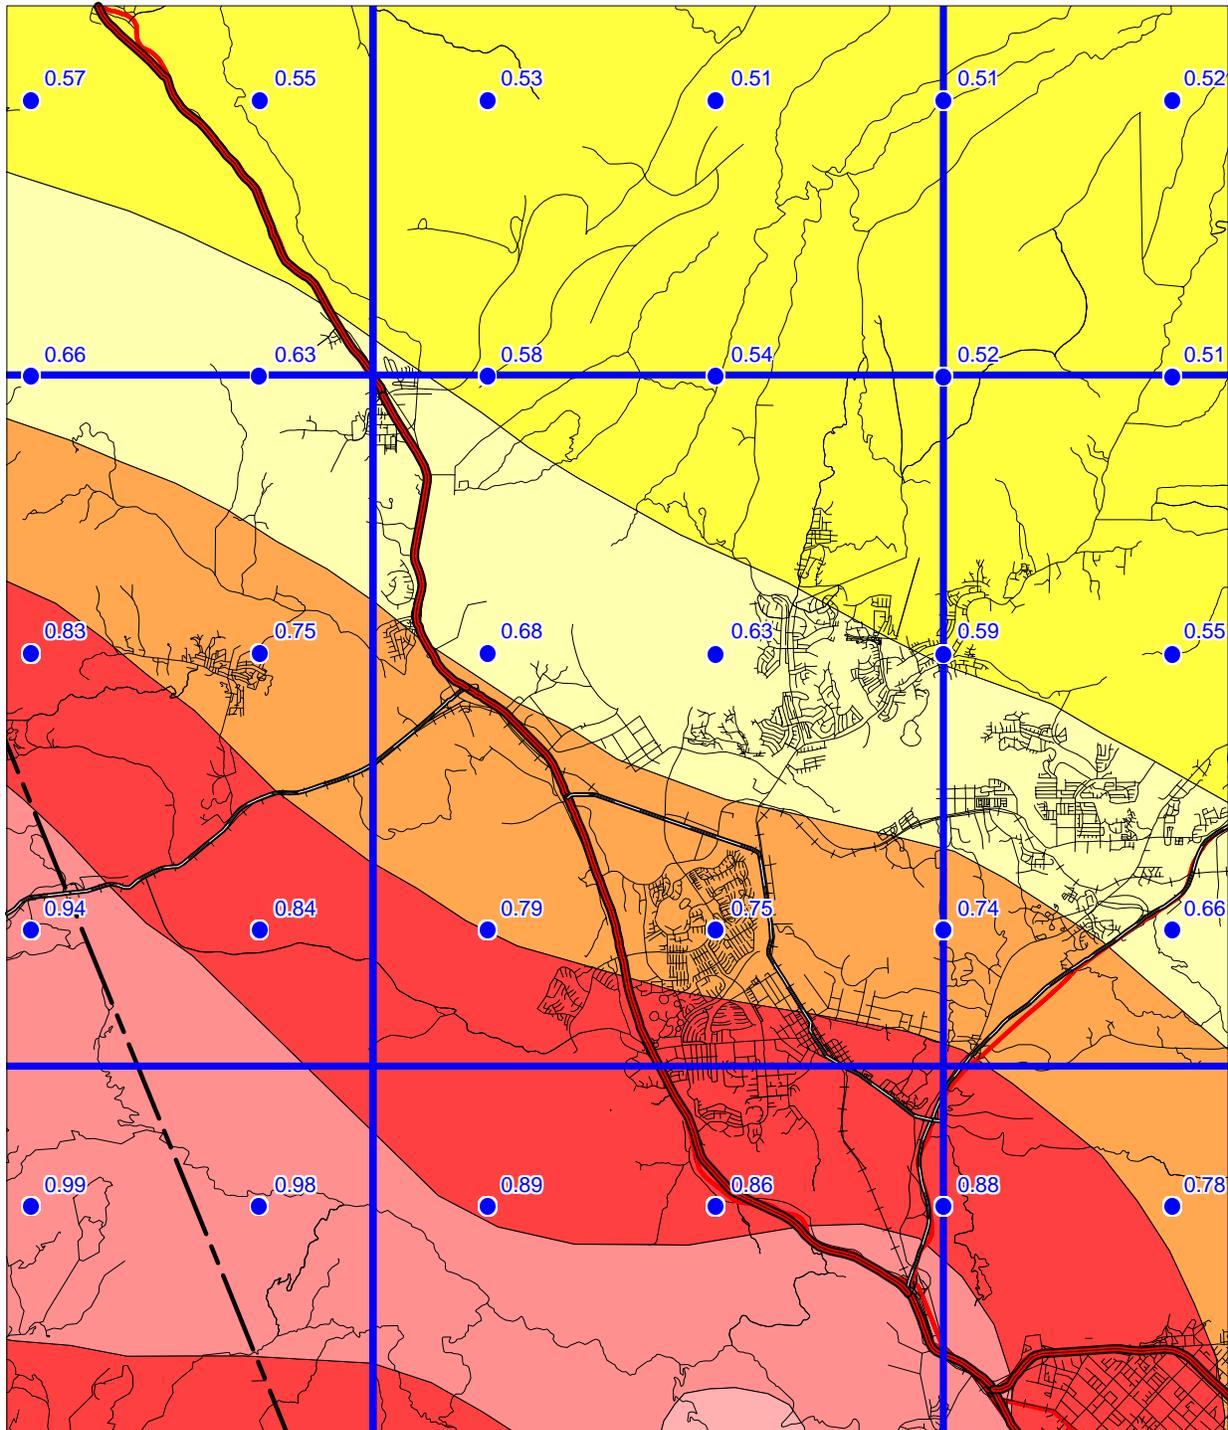


Figure 3.2

NEWHALL 7.5 MINUTE QUADRANGLE AND PORTIONS OF ADJACENT QUADRANGLES

10% EXCEEDANCE IN 50 YEARS PEAK GROUND ACCELERATION (g)
1998

ALLUVIUM CONDITIONS



Base map modified from MapInfo Street Works ©1998 MapInfo Corporation



Department of Conservation
Division of Mines and Geology



Figure 3.3

quadrangles are also shown so that the trends in the ground motion may be more apparent. We recommend estimating ground motion values by selecting the map that matches the actual site conditions, and interpolating from the calculated values of PGA rather than the contours, since the points are more accurate.

APPLICATIONS FOR LIQUEFACTION AND LANDSLIDE HAZARD ASSESSMENTS

Deaggregation of the seismic hazard identifies the contribution of each of the earthquakes (various magnitudes and distances) in the model to the ground motion hazard for a particular exposure period (see Cramer and Petersen, 1996). The map in Figure 3.4 identifies the magnitude and the distance (value in parentheses) of the earthquake that contributes most to the hazard at 10% probability of exceedance in 50 years on alluvial site conditions (*predominant earthquake*). This information gives a rationale for selecting a seismic record or ground motion level in evaluating ground failure. However, it is important to keep in mind that more than one earthquake may contribute significantly to the hazard at a site, and those events can have markedly different magnitudes and distances. For liquefaction hazard the predominant earthquake magnitude from Figure 3.4 and PGA from Figure 3.3 (alluvium conditions) can be used with the Youd and Idriss (1997) approach to estimate cyclic stress ratio demand. For landslide hazard the predominant earthquake magnitude and distance can be used to select a seismic record that is consistent with the hazard for calculating the Newmark displacement (Wilson and Keefer, 1983). When selecting the predominant earthquake magnitude and distance, it is advisable to consider the range of values in the vicinity of the site and perform the ground failure analysis accordingly. This would yield a range in ground failure hazard from which recommendations appropriate to the specific project can be made. Grid values for predominant earthquake magnitude and distance should **not** be interpolated at the site location, because these parameters are not continuous functions.

A preferred method of using the probabilistic seismic hazard model and the “simplified Seed-Idriss method” of assessing liquefaction hazard is to apply magnitude scaling probabilistically while calculating peak ground acceleration for alluvium. The result is a “magnitude-weighted” ground motion (liquefaction opportunity) map that can be used directly in the calculation of the cyclic stress ratio threshold for liquefaction and for estimating the factor of safety against liquefaction (Youd and Idriss, 1997). This can provide a better estimate of liquefaction hazard than use of predominate magnitude described above, because all magnitudes contributing to the estimate are used to weight the probabilistic calculation of peak ground acceleration (Real and others, 2000). Thus, large distant earthquakes that occur less frequently but contribute *more* to the liquefaction hazard are appropriately accounted for.

Figure 3.5 shows the magnitude-weighted alluvial PGA based on Idriss’ weighting function (Youd and Idriss, 1997). It is important to note that the values obtained from this map are pseudo-accelerations and should be used in the formula for factor of safety without any magnitude-scaling (a factor of 1) applied.


SEISMIC HAZARD EVALUATION OF THE NEWHALL QUADRANGLE NEWHALL 7.5-MINUTE QUADRANGLE AND PORTIONS OF ADJACENT QUADRANGLES

10% EXCEEDANCE IN 50 YEARS PEAK GROUND ACCELERATION

1998

PREDOMINANT EARTHQUAKE

Magnitude (M_w)
(Distance (km))

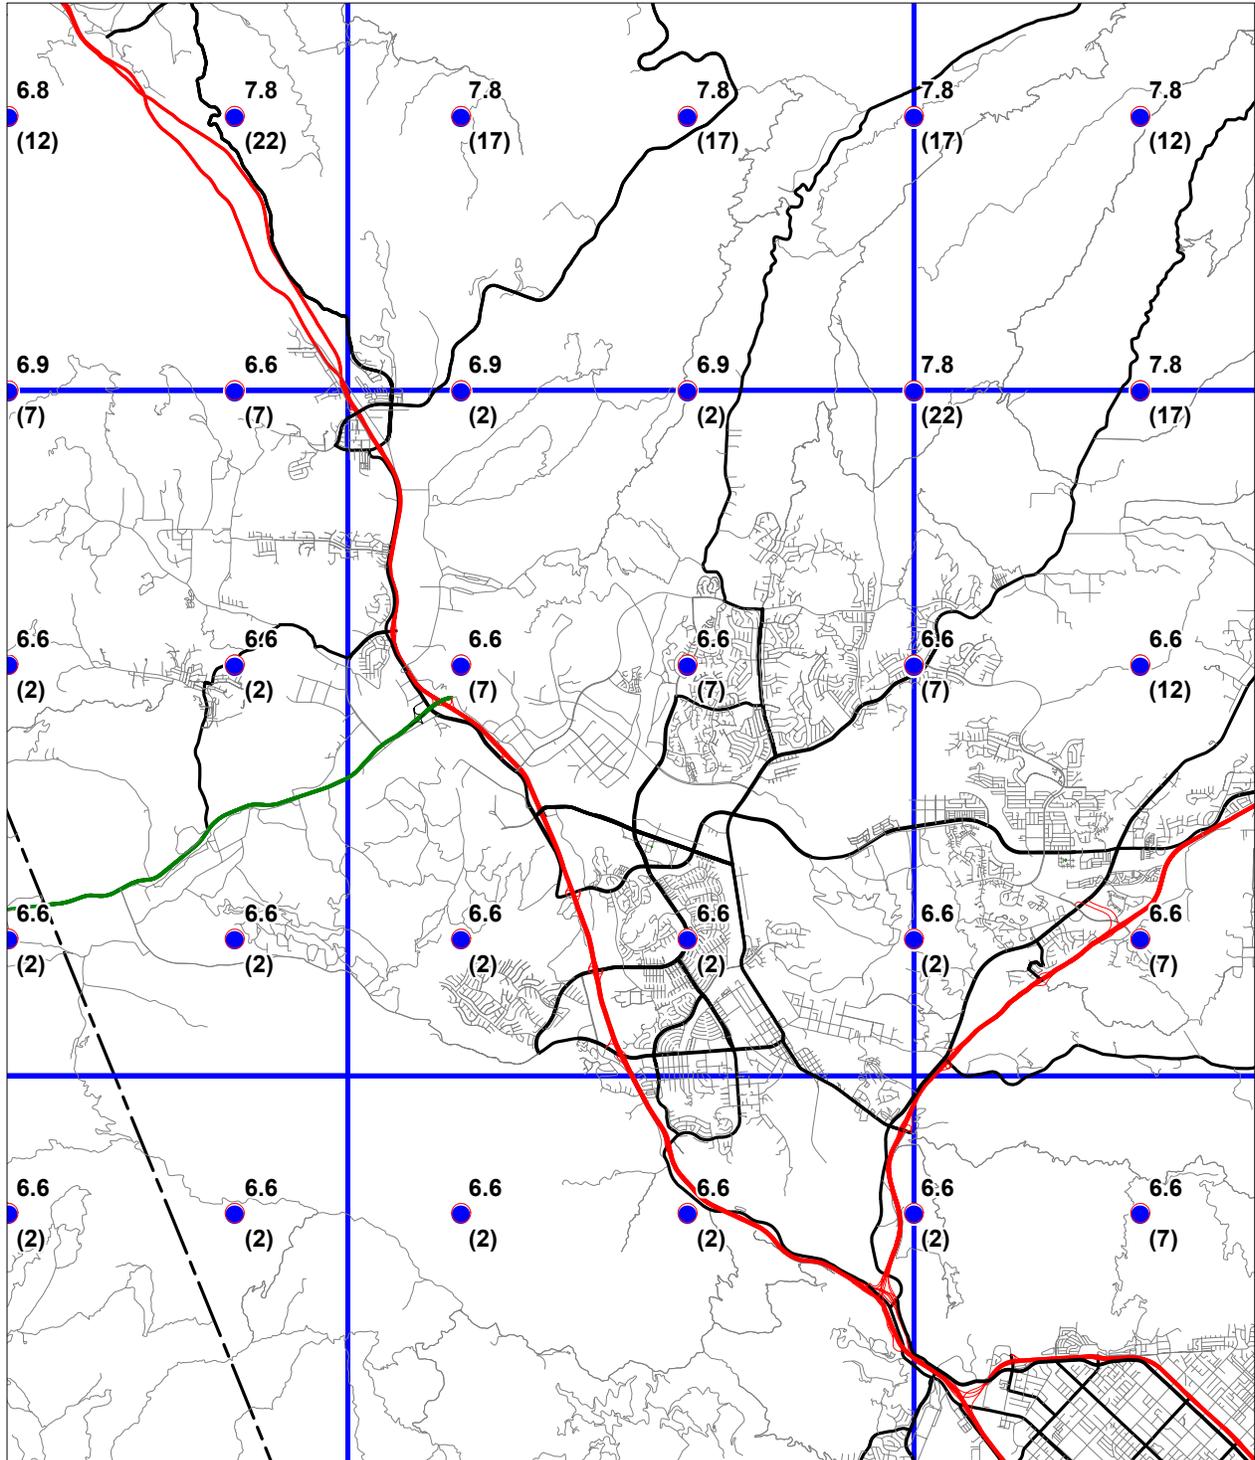

Base map from GDT



Department of Conservation
California Geological Survey

Figure 3.4




SEISMIC HAZARD EVALUATION OF THE NEWHALL QUADRANGLE
NEWHALL 7.5-MINUTE QUADRANGLE AND PORTIONS OF
ADJACENT QUADRANGLES

10% EXCEEDANCE IN 50 YEARS MAGNITUDE-WEIGHTED PSEUDO-PEAK ACCELERATION (g)
FOR ALLUVIUM

1998

LIQUEFACTION OPPORTUNITY

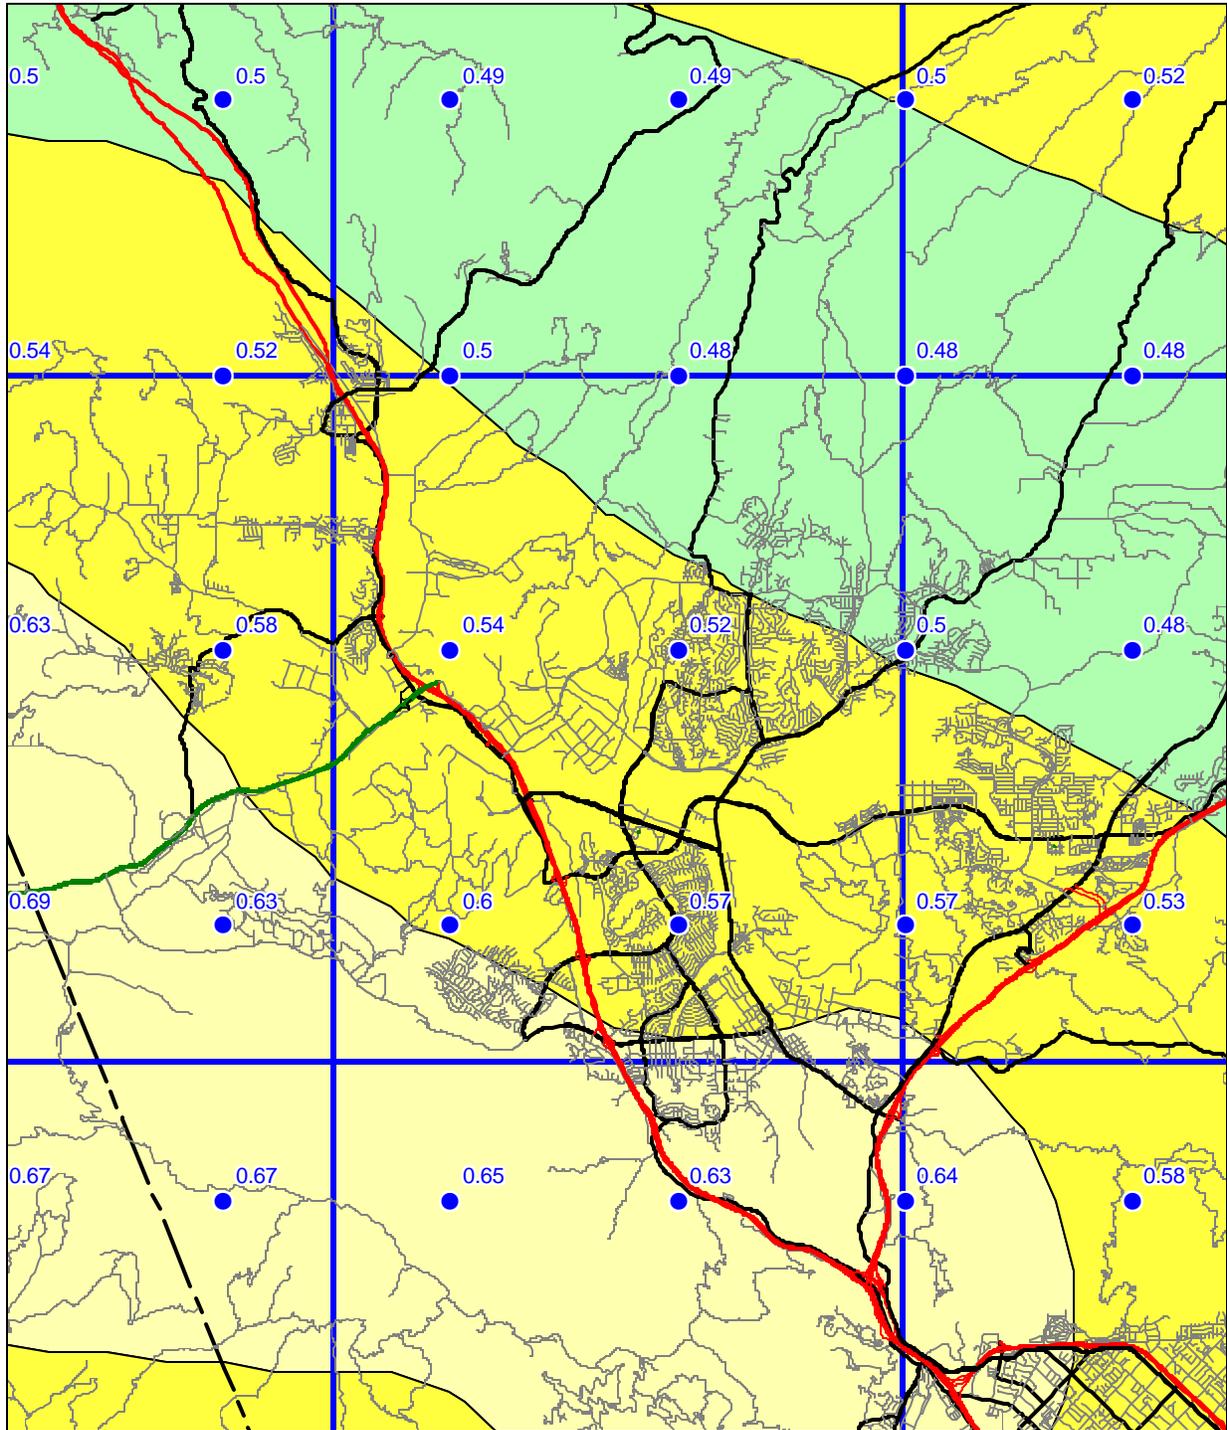

Base map from GDT



Department of Conservation
California Geological Survey



Figure 3.5

USE AND LIMITATIONS

The statewide map of seismic hazard has been developed using regional information and is *not appropriate for site specific structural design applications*. Use of the ground motion maps prepared at larger scale is limited to estimating earthquake loading conditions for preliminary assessment of ground failure at a specific location. We recommend consideration of site-specific analyses before deciding on the sole use of these maps for several reasons.

1. The seismogenic sources used to generate the peak ground accelerations were digitized from the 1:750,000-scale fault activity map of Jennings (1994). Uncertainties in fault location are estimated to be about 1 to 2 kilometers (Petersen and others, 1996). Therefore, differences in the location of calculated hazard values may also differ by a similar amount. At a specific location, however, the log-linear attenuation of ground motion with distance renders hazard estimates less sensitive to uncertainties in source location.
2. The hazard was calculated on a grid at sites separated by about 5 km (0.05 degrees). Therefore, the calculated hazard may be located a couple kilometers away from the site. We have provided shaded contours on the maps to indicate regional trends of the hazard model. However, the contours only show regional trends that may not be apparent from points on a single map. Differences of up to 2 km have been observed between contours and individual ground acceleration values. *We recommend that the user interpolate PGA between the grid point values rather than simply using the shaded contours.*
3. Uncertainties in the hazard values have been estimated to be about +/- 50% of the ground motion value at two standard deviations (Cramer and others, 1996).
4. Not all active faults in California are included in this model. For example, faults that do not have documented slip rates are not included in the source model. Scientific research may identify active faults that have not been previously recognized. Therefore, future versions of the hazard model may include other faults and omit faults that are currently considered.
5. A map of the predominant earthquake magnitude and distance is provided from the deaggregation of the probabilistic seismic hazard model. However, it is important to recognize that a site may have more than one earthquake that contributes significantly to the hazard. Therefore, in some cases earthquakes other than the predominant earthquake should also be considered.

Because of its simplicity, it is likely that the SPPV method (DOC, 1997) will be widely used to estimate earthquake shaking loading conditions for the evaluation of ground failure hazards. It should be kept in mind that ground motions at a given distance from an earthquake will vary depending on site-specific characteristics such as geology, soil properties, and topography, which may not have been adequately accounted for in the regional hazard analysis. Although this variance is represented to some degree by the

recorded ground motions that form the basis of the hazard model used to produce Figures 3.1, 3.2, and 3.3, extreme deviations can occur. More sophisticated methods that take into account other factors that may be present at the site (site amplification, basin effects, near source effects, etc.) should be employed as warranted. The decision to use the SPPV method with ground motions derived from Figures 3.1, 3.2, or 3.3 should be based on careful consideration of the above limitations, the geotechnical and seismological aspects of the project setting, and the “importance” or sensitivity of the proposed building with regard to occupant safety.

REFERENCES

- Boore, D.M., Joyner, W.B. and Fumal, T.E., 1997, Empirical near-source attenuation relationships for horizontal and vertical components of peak ground acceleration, peak ground velocity, and pseudo-absolute acceleration response spectra: *Seismological Research Letters*, v. 68, p. 154-179.
- California Department of Conservation, Division of Mines and Geology, 1997, *Guidelines for evaluating and mitigating seismic hazards in California: Special Publication 117*, 74 p.
- Campbell, K.W., 1997, Attenuation relationships for shallow crustal earthquakes based on California strong motion data: *Seismological Research Letters*, v. 68, p. 180-189.
- Cramer, C.H. and Petersen, M.D., 1996, Predominant seismic source distance and magnitude maps for Los Angeles, Orange and Ventura counties, California: *Bulletin of the Seismological Society of America*, v. 85, no. 5, p. 1645-1649.
- Cramer, C.H., Petersen, M.D. and Reichle, M.S., 1996, A Monte Carlo approach in estimating uncertainty for a seismic hazard assessment of Los Angeles, Ventura, and Orange counties, California: *Bulletin of the Seismological Society of America*, v. 86, p. 1681-1691.
- International Conference of Building Officials (ICBO), 1997, *Uniform Building Code: v. 2, Structural engineering and installation standards*, 492 p.
- Jennings, C.W., *compiler*, 1994, *Fault activity map of California and adjacent areas: California Department of Conservation, Division of Mines and Geology, California Geologic Data Map Series, map no. 8.*
- Petersen, M.D., Bryant, W.A., Cramer, C.H., Cao, T., Reichle, M.S., Frankel, A.D., Lienkaemper, J.J., McCrory, P.A. and Schwartz, D.P., 1996, Probabilistic seismic hazard assessment for the State of California: California Department of Conservation, Division of Mines and Geology Open-File Report 96-08; also U.S. Geological Survey Open-File Report 96-706, 33 p.


- Real, C.R., Petersen, M.D., McCrink, T.P. and Cramer, C.H., 2000, Seismic Hazard Deaggregation in zoning earthquake-induced ground failures in southern California: Proceedings of the Sixth International Conference on Seismic Zonation, November 12-15, Palm Springs, California, EERI, Oakland, CA.
- Sadigh, K., Chang, C.-Y., Egan, J.A., Makdisi, F. and Youngs, R.R., 1997, SEA96- A new predictive relation for earthquake ground motions in extensional tectonic regimes: *Seismological Research Letters*, v. 68, p. 190-198.
- Wilson, R.C. and Keefer, D.K., 1983, Dynamic analysis of a slope failure from the 1979 Coyote Lake, California, Earthquake: *Bulletin of the Seismological Society of America*, v. 73, p. 863-877.
- Youd, T.L. and Idriss I.M., 1997, Proceedings of the NCEER workshop on evaluation of liquefaction resistance of soils: Technical Report NCEER-97-0022, 40 p.
- Youngs, R.R., Chiou, S.-J., Silva, W.J. and Humphrey, J.R., 1997, Stochastic point-source modeling of ground motions in the Cascadia Region: *Seismological Research Letters*, v. 68, p. 74-85.



Base map enlarged from U.S.G.S. 30 x 60-minute series

Plate 1.1 Map depicting the portion of the Newhall quadrangle underlain by Quaternary alluvial and young fluvial sedimentary (flatland) deposits and artificial fill that are interpreted as being generally susceptible to liquefaction and were evaluated in this investigation.

ONE MILE
SCALE

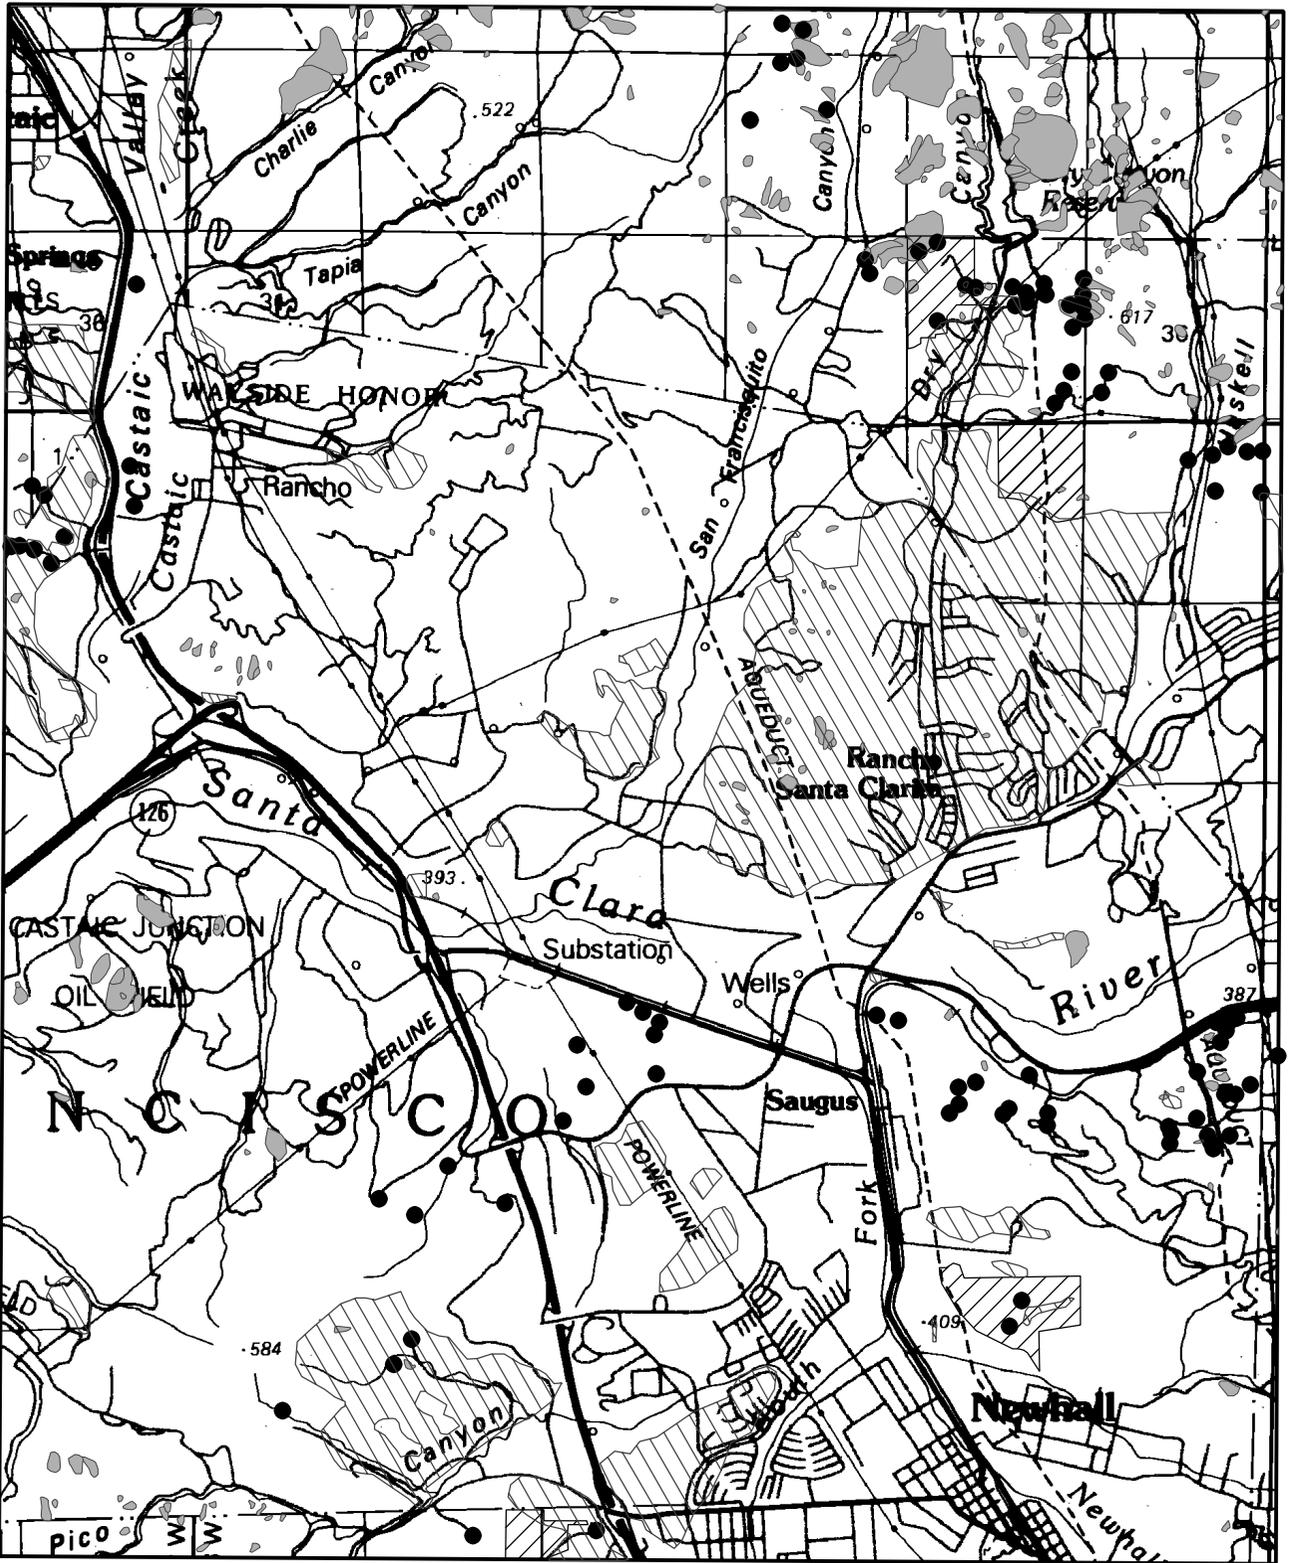

Base map enlarged from U.S.G.S. 30 x 60-minute series

Plate 2.1 Landslide Inventory, Shear Test Sample Locations, and Areas of Significant Grading, Newhall Quadrangle.

- Shear test sample location
- Landslide
- ▨ Area of significant grading
- ▧ Tract report with multiple shear tests

ONE MILE
SCALE