


**SEISMIC HAZARD ZONE REPORT FOR THE
INGLEWOOD 7.5-MINUTE QUADRANGLE,
LOS ANGELES COUNTY, CALIFORNIA**

1998

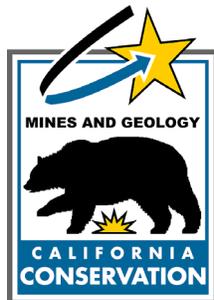

DEPARTMENT OF CONSERVATION
Division of Mines and Geology

THE RESOURCES AGENCY
MARY D. NICHOLS
SECRETARY FOR RESOURCES

STATE OF CALIFORNIA
GRAY DAVIS
GOVERNOR

DEPARTMENT OF CONSERVATION
DARRYL YOUNG
DIRECTOR



DIVISION OF MINES AND GEOLOGY
JAMES F. DAVIS, *STATE GEOLOGIST*

Copyright © 2001 by the California Department of Conservation. All rights reserved. No part of this publication may be reproduced without written consent of the Department of Conservation.

"The Department of Conservation makes no warranties as to the suitability of this product for any particular purpose."

SEISMIC HAZARD ZONE REPORT 027

**SEISMIC HAZARD ZONE REPORT FOR THE
INGLEWOOD 7.5-MINUTE QUADRANGLE,
LOS ANGELES COUNTY, CALIFORNIA**

CALIFORNIA GEOLOGICAL SURVEY'S PUBLICATION SALES OFFICES:

Southern California Regional Office
888 South Figueroa Street, Suite 475
Los Angeles, CA 90017
(213) 239-0878

Publications and Information Office
801 K Street, MS 14-31
Sacramento, CA 95814-3531
(916) 445-5716

Bay Area Regional Office
345 Middlefield Road, MS 520
Menlo Park, CA 94025
(650) 688-6327

CONTENTS

EXECUTIVE SUMMARY	viii
INTRODUCTION	1
SECTION 1 LIQUEFACTION EVALUATION REPORT Liquefaction Zones in the Inglewood 7.5-Minute Quadrangle, Los Angeles County, California.....	3
PURPOSE.....	3
BACKGROUND	4
METHODS SUMMARY.....	4
SCOPE AND LIMITATIONS.....	5
PART I.....	5
PHYSIOGRAPHY.....	5
GEOLOGY	6
ENGINEERING GEOLOGY	7
GROUND-WATER CONDITIONS	8
PART II.....	9
LIQUEFACTION POTENTIAL	9
LIQUEFACTION SUSCEPTIBILITY.....	9
LIQUEFACTION OPPORTUNITY	10
LIQUEFACTION ZONES	12
ACKNOWLEDGMENTS	13
REFERENCES	13
AIR PHOTOS.....	17

SECTION 2 EARTHQUAKE-INDUCED LANDSLIDE EVALUATION REPORT Earthquake-Induced Landslide Zones in the Inglewood 7.5-Minute Quadrangle, Los Angeles County, California.....	19
PURPOSE.....	19
BACKGROUND	20
METHODS SUMMARY.....	20
SCOPE AND LIMITATIONS.....	21
PART I.....	21
PHYSIOGRAPHY.....	21
GEOLOGY	22
ENGINEERING GEOLOGY.....	24
PART II.....	26
EARTHQUAKE-INDUCED LANDSLIDE HAZARD POTENTIAL.....	26
EARTHQUAKE-INDUCED LANDSLIDE HAZARD ZONE	29
ACKNOWLEDGMENTS	30
REFERENCES	31
AIR PHOTOS.....	33
APPENDIX A Source of Rock Strength Data.....	33
SECTION 3 GROUND SHAKING EVALUATION REPORT Potential Ground Shaking in the Inglewood 7.5-Minute Quadrangle, Los Angeles County, California.....	35
PURPOSE.....	35
EARTHQUAKE HAZARD MODEL	36
APPLICATIONS FOR LIQUEFACTION AND LANDSLIDE HAZARD ASSESSMENTS	40
USE AND LIMITATIONS.....	43
REFERENCES	44

ILLUSTRATIONS

Figure 2.1. Yield acceleration vs. Newmark displacement for the USC Station #14 strong-motion record from the 17 January 1994 Northridge, California Earthquake.....	27
Figure 3.1. Inglewood 7.5-Minute Quadrangle and portions of adjacent quadrangles, 10% exceedance in 50 years peak ground acceleration (g)—Firm rock conditions.	37
Figure 3.2. Inglewood 7.5-Minute Quadrangle and portions of adjacent quadrangles, 10% exceedance in 50 years peak ground acceleration (g)—Soft rock conditions.	38
Figure 3.3. Inglewood 7.5-Minute Quadrangle and portions of adjacent quadrangles, 10% exceedance in 50 years peak ground acceleration (g)—Alluvium conditions.....	39
Figure 3.4. Inglewood 7.5-Minute Quadrangle and portions of adjacent quadrangles, 10% exceedance in 50 years peak ground acceleration—Predominant earthquake.	41
Figure 3.5. Inglewood 7.5-Minute Quadrangle and portions of adjacent quadrangles, 10% exceedance in 50 years magnitude-weighted pseudo-peak acceleration for alluvium - Liquefaction opportunity	42
Table 2.1. Summary of the Shear Strength Statistics for the Inglewood Quadrangle.	25
Table 2.2. Summary of the Shear Strength Groups for the Inglewood Quadrangle.....	25
Table 2.3. Hazard Potential Matrix for Earthquake-Induced Landslides in the Inglewood Quadrangle.....	29
Plate 1.1. Quaternary Geologic Map of the Inglewood Quadrangle.....	46
Plate 1.2. Historically Highest Ground Water Contours and Borehole Log Data, Inglewood Quadrangle, California.....	47
Plate 2.1. Landslide Inventory, Shear Test Sample Locations, Inglewood Quadrangle.....	48

EXECUTIVE SUMMARY

This report summarizes the methods and sources of information used to prepare the Seismic Hazard Zone Map for the Inglewood 7.5-minute Quadrangle, Los Angeles County, California. The map displays the boundaries of Zones of Required Investigation for liquefaction and earthquake-induced landslides over an area of approximately 62 square miles at a scale of 1 inch = 2,000 feet.

The Inglewood Quadrangle is densely populated and includes all or parts of the cities of Carson, Compton, Gardena, Hawthorne, Inglewood, Lawndale, Los Angeles, Redondo Beach, and Torrance, as well as unincorporated areas of Los Angeles County. Major transportation routes traversing the Inglewood Quadrangle include the Century Freeway (I-105), the San Diego Freeway (I-405), and the Harbor Freeway (I-110). Within the quadrangle are the northwest-trending Baldwin Hills and the Rosecrans Hills, which resulted from uplift along the Newport – Inglewood structural zone. Elevations range from approximately 75 feet to over 400 feet. To the east of the hills is the regional coastal basin, known as the Downey Plain. The main drainage courses within the quadrangle are the Dominguez Channel, Compton Creek, and Centinela Creek.

The map is prepared by employing geographic information system (GIS) technology, which allows the manipulation of three-dimensional data. Information considered includes topography, surface and subsurface geology, borehole data, historical ground-water levels, existing landslide features, slope gradient, rock-strength measurements, geologic structure, and probabilistic earthquake shaking estimates. The shaking inputs are based upon probabilistic seismic hazard maps that depict peak ground acceleration, mode magnitude, and mode distance with a 10% probability of exceedance in 50 years.

In the Inglewood Quadrangle the liquefaction zone occurs primarily as a broad swath within the Downey Plain in the northeastern portion of the quadrangle. Segments of the liquefaction zone also coincide with Centinela Creek and the Dominguez Channel. Terrain that is susceptible to landsliding is limited to the Baldwin Hills where less than 0.1 percent of the quadrangle lies within the earthquake-induced landslide hazard zone for the Inglewood Quadrangle.

How to view or obtain the map

Seismic Hazard Zone Maps, Seismic Hazard Zone Reports and additional information on seismic hazard zone mapping in California are available on the Division of Mines and Geology's Internet page: <http://www.conservation.ca.gov/CGS/index.htm>

Paper copies of Official Seismic Hazard Zone Maps, released by DMG, which depict zones of required investigation for liquefaction and/or earthquake-induced landslides, are available for purchase from:

BPS Reprographic Services
945 Bryant Street
San Francisco, California 94105
(415) 512-6550

Seismic Hazard Zone Reports (SHZR) summarize the development of the hazard zone map for each area and contain background documentation for use by site investigators and local government reviewers. These reports are available for reference at DMG offices in Sacramento, San Francisco, and Los Angeles. **NOTE: The reports are not available through BPS Reprographic Services.**

INTRODUCTION

The Seismic Hazards Mapping Act (the Act) of 1990 (Public Resources Code, Chapter 7.8, Division 2) directs the California Department of Conservation (DOC), Division of Mines and Geology (DMG) to delineate seismic hazard zones. The purpose of the Act is to reduce the threat to public health and safety and to minimize the loss of life and property by identifying and mitigating seismic hazards. Cities, counties, and state agencies are directed to use the seismic hazard zone maps in their land-use planning and permitting processes. They must withhold development permits for a site within a zone until the geologic and soil conditions of the project site are investigated and appropriate mitigation measures, if any, are incorporated into development plans. The Act also requires sellers (and their agents) of real property within a mapped hazard zone to disclose at the time of sale that the property lies within such a zone. Evaluation and mitigation of seismic hazards are to be conducted under guidelines established by the California State Mining and Geology Board (DOC, 1997; also available on the Internet at <http://gmw.consrv.ca.gov/shmp/webdocs/sp117.pdf>).

The Act also directs SMGB to appoint and consult with the Seismic Hazards Mapping Act Advisory Committee (SHMAAC) in developing criteria for the preparation of the seismic hazard zone maps. SHMAAC consists of geologists, seismologists, civil and structural engineers, representatives of city and county governments, the state insurance commissioner and the insurance industry. In 1991 SMGB adopted initial criteria for delineating seismic hazard zones to promote uniform and effective statewide implementation of the Act. These initial criteria provide detailed standards for mapping regional liquefaction hazards. They also directed DMG to develop a set of probabilistic seismic maps for California and to research methods that might be appropriate for mapping earthquake-induced landslide hazards.

In 1996, working groups established by SHMAAC reviewed the prototype maps and the techniques used to create them. The reviews resulted in recommendations that 1) the process for zoning liquefaction hazards remain unchanged and 2) earthquake-induced landslide zones be delineated using a modified Newmark analysis.

This Seismic Hazard Zone Report summarizes the development of the hazard zone map. The process of zoning for liquefaction uses a combination of Quaternary geologic mapping, historical ground-water information, and subsurface geotechnical data. The process for zoning earthquake-induced landslides incorporates earthquake loading, existing landslide features, slope gradient, rock strength, and geologic structure. Probabilistic seismic hazard maps, which are the underpinning for delineating seismic hazard zones, have been prepared for peak ground acceleration, mode magnitude, and mode distance with a 10% probability of exceedance in 50 years (Petersen and others, 1996) in accordance with the mapping criteria.

This report summarizes seismic hazard zone mapping for potentially liquefiable soils and earthquake-induced landslides in the Inglewood 7.5-minute Quadrangle.

SECTION 1

LIQUEFACTION EVALUATION REPORT

Liquefaction Zones in the Inglewood 7.5-Minute Quadrangle, Los Angeles County, California

By
Cynthia L. Pridmore

**California Department of Conservation
Division of Mines and Geology**

PURPOSE

The Seismic Hazards Mapping Act (the Act) of 1990 (Public Resources Code, Chapter 7.8, Division 2) directs the California Department of Conservation (DOC), Division of Mines and Geology (DMG) to delineate Seismic Hazard Zones. The purpose of the Act is to reduce the threat to public health and safety and to minimize the loss of life and property by identifying and mitigating seismic hazards. Cities, counties, and state agencies are directed to use seismic hazard zone maps developed by DMG in their land-use planning and permitting processes. The Act requires that site-specific geotechnical investigations be performed prior to permitting most urban development projects within seismic hazard zones. Evaluation and mitigation of seismic hazards are to be conducted under guidelines adopted by the California State Mining and Geology Board (DOC, 1997; also available on the Internet at <http://gmw.consrv.ca.gov/shmp/webdocs/sp117.pdf>).

This section of the evaluation report summarizes seismic hazard zone mapping for potentially liquefiable soils in the Inglewood 7.5-minute Quadrangle. This section, along with Section 2 (addressing earthquake-induced landslides), and Section 3 (addressing potential ground shaking), form a report that is one of a series that summarizes production of similar seismic hazard zone maps within the state (Smith, 1996).

Additional information on seismic hazards zone mapping in California is on DMG's Internet web page: <http://www.conservation.ca.gov/CGS/index.htm>

BACKGROUND

Liquefaction-induced ground failure historically has been a major cause of earthquake damage in southern California. During the 1971 San Fernando and 1994 Northridge earthquakes, significant damage to roads, utility pipelines, buildings, and other structures in the Los Angeles area was caused by liquefaction-induced ground displacement.

Localities most susceptible to liquefaction-induced damage are underlain by loose, water-saturated, granular sediment within 40 feet of the ground surface. These geological and ground-water conditions exist in parts of southern California, most notably in some densely populated valley regions and alluviated floodplains. In addition, the potential for strong earthquake ground shaking is high because of the many nearby active faults. The combination of these factors constitutes a significant seismic hazard in the southern California region in general, as well as in the Inglewood Quadrangle.

METHODS SUMMARY

Characterization of liquefaction hazard presented in this report requires preparation of maps that delineate areas underlain by potentially liquefiable sediment. The following were collected or generated for this evaluation:

- Existing geologic maps were used to provide an accurate representation of the spatial distribution of Quaternary deposits in the study area. Geologic units that generally are susceptible to liquefaction include late Quaternary alluvial and fluvial sedimentary deposits and artificial fill
- Construction of shallow ground-water maps showing the historically highest known ground-water levels
- Quantitative analysis of geotechnical data to evaluate liquefaction potential of deposits
- Information on potential ground shaking intensity based on DMG probabilistic shaking maps

The data collected for this evaluation were processed into a series of geographic information system (GIS) layers using commercially available software. The liquefaction zone map was derived from a synthesis of these data and according to criteria adopted by the State Mining and Geology Board (DOC, 2000).

SCOPE AND LIMITATIONS

Evaluation for potentially liquefiable soils generally is confined to areas covered by Quaternary (less than about 1.6 million years) sedimentary deposits. Such areas within the Inglewood Quadrangle consist mainly of floodplains. DMG's liquefaction hazard evaluations are based on information on earthquake ground shaking, surface and subsurface lithology, geotechnical soil properties, and ground-water depth, which is gathered from various sources. Although selection of data used in this evaluation was rigorous, the quality of the data used varies. The State of California and the Department of Conservation make no representations or warranties regarding the accuracy of the data obtained from outside sources.

Liquefaction zone maps are intended to prompt more detailed, site-specific geotechnical investigations, as required by the Act. As such, liquefaction zone maps identify areas where the potential for liquefaction is relatively high. They do not predict the amount or direction of liquefaction-related ground displacements, or the amount of damage to facilities that may result from liquefaction. Factors that control liquefaction-induced ground failure are the extent, depth, density, and thickness of liquefiable materials, depth to ground water, rate of drainage, slope gradient, proximity to free faces, and intensity and duration of ground shaking. These factors must be evaluated on a site-specific basis to assess the potential for ground failure at any given project site.

Information developed in the study is presented in two parts: physiographic, geologic, and hydrologic conditions in PART I, and liquefaction and zoning evaluations in PART II.

PART I

PHYSIOGRAPHY

Study Area Location and Physiography

The Inglewood Quadrangle covers an area of about 62 square miles within the Los Angeles Basin. The study area is densely populated and includes all or parts of the cities of Carson, Compton, Gardena, Hawthorne, Inglewood, Lawndale, Los Angeles, Redondo Beach, and Torrance, as well as unincorporated areas of Los Angeles County. Major transportation routes traversing the Inglewood Quadrangle include the Century Freeway (I-105), the San Diego Freeway (I-405), and the Harbor Freeway (I-110).

The Inglewood Quadrangle, located at the northwestern end of the Peninsular Ranges geomorphic province, contains a northwest-trending uplifted area consisting of the Baldwin Hills and the Rosecrans Hills. The hills are geomorphic features associated with uplift along the Newport –Inglewood structural zone. Older Quaternary units are exposed in these strongly dissected hills, and elevations range from approximately 75 feet

to over 400 feet. To the east, Holocene alluvium lies upon the regional coastal basin, also known as the Downey Plain. The sediments overlie an erosional surface of late Pleistocene age. To the west of the Rosecrans Hills is an elevated plain underlain by older Quaternary alluvium. This area contains a drainage basin, with Holocene sediments, that narrows to the south into the Dominguez Channel. Within the southwestern corner of the quadrangle Pleistocene dune sand overlies older alluvial deposits.

The main drainage courses within the quadrangle are the Dominguez Channel, Compton Creek, and Centinela Creek.

GEOLOGY

Surficial Geology

Geologic units that generally are susceptible to liquefaction include late Quaternary alluvial and fluvial sedimentary deposits and artificial fill. To evaluate the areal and vertical distribution of shallow Quaternary deposits and to provide information on subsurface geologic, lithologic and engineering properties of the units a digital map obtained from the U.S. Geological Survey (Tinsley, unpublished) was used as a base to prepare a geologic map of the Inglewood Quadrangle. Other geologic maps reviewed include Castle (1960), Weber and others (1982), Poland and others (1959), CDWR (1961), and a digital map prepared by the Southern California Areal Mapping Project (SCAMP, unpublished). Geologic contacts were modified using the sources listed above, air photos (Fairchild, 1927), and older topographic maps (USGS, 1930, 1942, 1924a, and 1924b). Stratigraphic nomenclature was revised to follow the format developed by SCAMP (Morton and Kennedy, 1989). The revised geologic map that was used in this study of liquefaction susceptibility is included as Plate 1.1.

The oldest geologic units mapped in the Inglewood Quadrangle are the Pleistocene Inglewood Formation (Qi) and San Pedro Formation (Qsp) which are exposed in the Baldwin Hills. A reddish brown, well-cemented and resistant, locally pebbly or gravelly, silty sand caps some of the ridges in this area and is designated older alluvium (Qoa). A more detailed description of the geology of the Baldwin Hills is presented in Section 2.

Quaternary sediments covering the remainder of the Inglewood Quadrangle include older eolian deposits (Qoe), which form a portion of the El Segundo Sand Hills that extends into the southwestern corner of the map, older alluvium (Qoa) deposited around the margin of the Baldwin Hills and on the elevated plain and Rosecrans Hills to the south, younger alluvial-fan deposits (Qyf) just west of the center of the quadrangle, and younger floodplain and stream deposits (Qya2) in the northeastern and south-central portion of the map as well as along the Centinela Creek drainage

ENGINEERING GEOLOGY

Information on subsurface geology and engineering characteristics of flatland deposits was obtained from borehole logs collected from reports on geotechnical and environmental projects. For this investigation, several hundred borehole logs were collected from the files of the California Department of Transportation (Caltrans); the Department of Water Resources; the Los Angeles County Department of Public Works; the California Regional Water Quality Control Board - Los Angeles Region; DMG Environmental Review and Hospital Review Projects; and the U.S. Geological Survey (USGS). The USGS supplied paper logs of the Los Angeles County of Public Works storm-drain borehole data. These logs were used in earlier liquefaction studies of the Los Angeles area (Tinsley and Fumal, 1985; Tinsley and others, 1985).

Lithologic, soil test, and related data from approximately 246 logs were entered into the DMG (Geographic Information System) database. The remaining logs were reviewed during this investigation to aid with the stratigraphic correlation. Locations of all exploratory boreholes entered into the database are shown in Plate 1.2.

Standard Penetration Test (SPT) data provide a standardized measure of the penetration resistance of a geologic deposit and commonly are used as an index of density. Many geotechnical investigations record SPT data, including the number of blows by a 140-pound drop weight required to drive a sampler of specific dimensions one foot into the soil. Recorded blow counts for non-SPT geotechnical sampling, where the sampler diameter, hammer weight or drop distance differ from those specified for an SPT (ASTM D1586), were converted to SPT-equivalent blow count values and entered into the DMG GIS. The actual and converted SPT blow counts were normalized to a common reference effective overburden pressure of one atmosphere (approximately one ton per square foot) and a hammer efficiency of 60% using a method described by Seed and Idriss (1982) and Seed and others (1985). This normalized blow count is referred to as $(N_1)_{60}$.

Descriptions of characteristics of geologic units recorded on the borehole logs are given below. These descriptions are generalized to give the characteristics of the unit most commonly encountered.

Older alluvium (Qoa) and older eolian deposits (Qoe)

In general, the older alluvium of the Rosecrans Hills, the Baldwin Hills, and the Gardena area consists of stiff to hard clay and medium dense to very dense sand, silty sand, clayey sand and silt.

Within the western and southwestern portion of the Inglewood Quadrangle, the elevated plain consists of older alluvium overlain, in part, by stabilized older dunes. The dune sand is up to 15 feet thick and is composed of medium dense fine silty sand and silt. Locally, the top 10 feet of this unit is very loose. Underlying and adjacent to this unit, the older alluvium is medium dense to very dense sand, silty sand, clayey sand and silt, and very stiff clay. Locally, in the Lawndale area at a depth of 25 to 30 feet, there occurs a 20- to 25-foot thick unit of loose to medium dense silt, fine sand and shell material.

Younger alluvium (Qyf, Qya2)

The younger alluvial fan (Qyf) in the central portion of the quadrangle is composed of medium dense to very dense sand, silty sand, and silt, and stiff clay. This unit appears to be up to 45 feet thick, however the borehole characteristics become indistinguishable from the underlying older alluvium with depth. The younger alluvial valley deposits (Qya2) mapped in this portion of the quadrangle consists of approximately 10 to 20 feet of soft to firm clay and clayey sand. These materials overlie dense sands and stiff clays of older alluvium.

The younger alluvial valley deposits (Qya2) of the northeastern portion of the quadrangle consist predominately of loose to dense sands, silty sands, and silts. Clay units are locally present, but become much more dominant adjacent to the Rosecrans Hills.

GROUND-WATER CONDITIONS

Liquefaction hazard may exist in areas where depth to ground water is 40 feet or less. DMG uses the highest known ground-water levels because water levels during an earthquake cannot be anticipated because of the unpredictable fluctuations caused by natural processes and human activities. An historical-high ground-water map differs from most ground-water maps, which show the actual water table at a particular time. Plate 1.2 depicts a hypothetical ground-water table within alluviated areas.

Ground-water conditions were investigated in the Inglewood Quadrangle to evaluate the depth to saturated materials. Saturated conditions reduce the effective normal stress, thereby increasing the likelihood of earthquake-induced liquefaction (Youd, 1973). The evaluation relied heavily on turn of the century water-well logs (Mendenhall, 1905), and water measurements from borehole logs collected for this study. Other reports that were reviewed include Poland and others (1959), California Department of Water Resources (1961), and California Department of Public Works (1952). The depths to first-encountered unconfined ground water were plotted onto a map (Plate 1.2) of the project area to constrain the estimate of historically shallowest ground water. Water depths from boreholes known to penetrate confined aquifers were not utilized.

In the late 1800's many shallow wells showed near-surface water levels particularly in those areas already known to have deeper artesian conditions (Mendenhall, 1905). Subsequent management and withdrawal of ground water markedly reduced the distribution of both of these conditions. Although the potential for recharge is beyond the scope of this report, the review of 100's of boreholes and conclusions from California Department of Water Resources (1961) and Tinsley and others (1985), all suggest that water could move upward into semi-perched zones if pressure levels in the underlying units become sufficiently high, due to the discontinuous character and high sand content of the confining units.

PART II

LIQUEFACTION POTENTIAL

Liquefaction may occur in water-saturated sediment during moderate to great earthquakes. Liquefied sediment loses strength and may fail, causing damage to buildings, bridges, and other structures. Many methods for mapping liquefaction hazard have been proposed. Youd (1991) highlights the principal developments and notes some of the widely used criteria. Youd and Perkins (1978) demonstrate the use of geologic criteria as a qualitative characterization of liquefaction susceptibility and introduce the mapping technique of combining a liquefaction susceptibility map and a liquefaction opportunity map to produce a liquefaction potential map. Liquefaction susceptibility is a function of the capacity of sediment to resist liquefaction. Liquefaction opportunity is a function of the potential seismic ground shaking intensity.

The method applied in this study for evaluating liquefaction potential is similar to that of Tinsley and others (1985). Tinsley and others (1985) applied a combination of the techniques used by Seed and others (1983) and Youd and Perkins (1978) for their mapping of liquefaction hazards in the Los Angeles region. This method combines geotechnical analyses, geologic and hydrologic mapping, and probabilistic earthquake shaking estimates, but follows criteria adopted by the State Mining and Geology Board (DOC, 2000).

LIQUEFACTION SUSCEPTIBILITY

Liquefaction susceptibility reflects the relative resistance of a soil to loss of strength when subjected to ground shaking. Physical properties of soil such as sediment grain-size distribution, compaction, cementation, saturation, and depth govern the degree of resistance to liquefaction. Some of these properties can be correlated to a sediment's geologic age and environment of deposition. With increasing age, relative density may increase through cementation of the particles or compaction caused by the weight of the overlying sediment. Grain-size characteristics of a soil also influence susceptibility to liquefaction. Sand is more susceptible than silt or gravel, although silt of low plasticity is treated as liquefiable in this investigation. Cohesive soils generally are not considered susceptible to liquefaction. Such soils may be vulnerable to strength loss with remolding and represent a hazard that is not addressed in this investigation. Soil characteristics and processes that result in higher measured penetration resistances generally indicate lower liquefaction susceptibility. Thus, blow count and cone penetrometer values are useful indicators of liquefaction susceptibility.

Saturation is required for liquefaction, and the liquefaction susceptibility of a soil varies with the depth to ground water. Very shallow ground water increases the susceptibility to liquefaction (soil is more likely to liquefy). Soils that lack resistance (susceptible soils) typically are saturated, loose and sandy. Soils resistant to liquefaction include all soil types that are dry, cohesive, or sufficiently dense.

DMG's map inventory of areas containing soils susceptible to liquefaction begins with evaluation of geologic maps and historical occurrences, cross-sections, geotechnical test data, geomorphology, and ground-water hydrology. Soil properties and soil conditions such as type, age, texture, color, and consistency, along with historical depths to ground water are used to identify, characterize, and correlate susceptible soils. Because Quaternary geologic mapping is based on similar soil observations, liquefaction susceptibility maps typically are similar to Quaternary geologic maps. DMG's qualitative susceptible soil inventory is summarized below.

Younger alluvium (Qyf, Qya2)

The younger alluvial valley (Qya2) deposits in the north and eastern portion of the Inglewood Quadrangle consist largely of loose to dense sands and silts. Where historical ground water levels are within 40 feet of the surface, these deposits are judged to be susceptible to liquefaction.

The younger alluvial fan (Qyf) unit in the central portion of the quadrangle is dense to very dense and is considered to have a low potential for liquefaction. Similarly the younger alluvial valley deposits (Qya2) in this vicinity are also considered to have a low potential for liquefaction. The Qya2 units are generally stiff clays that lie above the historically high ground-water elevation.

Older alluvium (Qoa, Qoe)

Most of the old Quaternary sedimentary deposits of the Inglewood Quadrangle are described in borehole logs as being medium dense to very dense sand, silt, and clay. In general, these deposits are considered to have a low liquefaction susceptibility. Within the western and southwestern portion of the Inglewood Quadrangle some loose dune sand does occur, however this unit is located above the historical high ground-water level. Locally, in the Lawndale area at a depth of 25 to 30 feet, there occurs a loose to medium dense unit of sand, silt and shell debris in an area where the historical high ground water is at less than 40 feet. Although the liquefaction analysis performed on these layers results in factors of safety of less than one, the unit is overlain by 15 to 20 feet of very dense to dense sand, and is, therefore, considered to have a low susceptibility.

LIQUEFACTION OPPORTUNITY

Liquefaction opportunity is a measure, expressed in probabilistic terms, of the potential for strong ground shaking. Analyses of in-situ liquefaction resistance require assessment of liquefaction opportunity. The minimum level of seismic excitation to be used for such purposes is the level of peak ground acceleration (PGA) with a 10% probability of exceedance over a 50-year period (DOC, 2000). The earthquake magnitude used in DMG's analysis is the magnitude that contributes most to the calculated PGA for an area.

For the Inglewood Quadrangle, PGAs of 0.44 g to 0.50 g, resulting from earthquakes ranging in magnitude from 6.7 to 7.1, were used for liquefaction analyses. The PGA and magnitude values were based on de-aggregation of the probabilistic hazard at the 10% in

50-year hazard level (Petersen and others, 1996; Cramer and Petersen, 1996). See the ground motion section (3) of this report for further details.

Quantitative Liquefaction Analysis

DMG performs quantitative analysis of geotechnical data to evaluate liquefaction potential using the Seed-Idriss Simplified Procedure (Seed and Idriss, 1971; Seed and others, 1983; National Research Council, 1985; Seed and others, 1985; Seed and Harder, 1990; Youd and Idriss, 1997). Using the Seed-Idriss Simplified Procedure one can calculate soil resistance to liquefaction, expressed in terms of cyclic resistance ratio (CRR), based on SPT results, ground-water level, soil density, moisture content, soil type, and sample depth. CRR values are then compared to calculated earthquake-generated shear stresses expressed in terms of cyclic stress ratio (CSR). The Seed-Idriss Simplified Procedure requires normalizing earthquake loading relative to a M7.5 event for the liquefaction analysis. To accomplish this, DMG's analysis uses the Idriss magnitude scaling factor (MSF) (Youd and Idriss, 1997). It is convenient to think in terms of a factor of safety (FS) relative to liquefaction, where: $FS = (CRR / CSR) * MSF$. FS, therefore, is a quantitative measure of liquefaction potential. DMG uses a factor of safety of 1.0 or less, where CSR equals or exceeds CRR, to indicate the presence of potentially liquefiable soil. While an FS of 1.0 is considered the "trigger" for liquefaction, for a site specific analysis an FS of as much as 1.5 may be appropriate depending on the vulnerability of the site and related structures. The DMG liquefaction analysis program calculates an FS for each geotechnical sample for which blow counts were collected. Typically, multiple samples are collected for each borehole. The lowest FS in each borehole is used for that location. FS values vary in reliability according to the quality of the geotechnical data used in their calculation. FS, as well as other considerations such as slope, presence of free faces, and thickness and depth of potentially liquefiable soil, are evaluated in order to construct liquefaction potential maps, which are then used to make a map showing zones of required investigation.

Approximately 92 percent of the borehole logs reviewed in this study (Plate 1.2) include blow-count data from SPTs or from penetration tests that allow reasonable blow count translations to SPT-equivalent values. Non-SPT values, such as those resulting from the use of 2-inch or 2½-inch inside-diameter ring samplers, were translated to SPT-equivalent values if reasonable factors could be used in conversion calculations. The reliability of the SPT-equivalent values varies. Therefore, they are weighted and used in a more qualitative manner. Few borehole logs, however, include all of the information (e.g. soil density, moisture content, sieve analysis, etc.) required for an ideal Seed-Idriss Simplified Procedure. For boreholes having acceptable penetration tests, liquefaction analysis is performed using recorded density, moisture, and sieve test values or using averaged test values of similar materials.

LIQUEFACTION ZONES

Criteria for Zoning

Areas underlain by materials susceptible to liquefaction during an earthquake were included in liquefaction zones using criteria developed by the Seismic Hazards Mapping Act Advisory Committee and adopted by the California State Mining and Geology Board (DOC, 2000). Under those guideline criteria, liquefaction zones are areas meeting one or more of the following:

1. Areas known to have experienced liquefaction during historical earthquakes
2. All areas of uncompacted artificial fill containing liquefaction-susceptible material that are saturated, nearly saturated, or may be expected to become saturated
3. Areas where sufficient existing geotechnical data and analyses indicate that the soils are potentially liquefiable
4. Areas where existing geotechnical data are insufficient

In areas of limited or no geotechnical data, susceptibility zones may be identified by geologic criteria as follows:

- a) Areas containing soil deposits of late Holocene age (current river channels and their historic floodplains, marshes and estuaries), where the M7.5-weighted peak acceleration that has a 10% probability of being exceeded in 50 years is greater than or equal to 0.10 g and the water table is less than 40 feet below the ground surface; or
- b) Areas containing soil deposits of Holocene age (less than 11,000 years), where the M7.5-weighted peak acceleration that has a 10% probability of being exceeded in 50 years is greater than or equal to 0.20 g and the historical high water table is less than or equal to 30 feet below the ground surface; or
- c) Areas containing soil deposits of latest Pleistocene age (11,000 to 15,000 years), where the M7.5-weighted peak acceleration that has a 10% probability of being exceeded in 50 years is greater than or equal to 0.30 g and the historical high water table is less than or equal to 20 feet below the ground surface.

Application of SMGB criteria to liquefaction zoning in the Inglewood Quadrangle is summarized below.

Areas of Past Liquefaction

Historic liquefaction has not been confirmed in the Inglewood Quadrangle. However, a depression that developed in the sediments of Centinela Creek Valley as a result of the 1920 Inglewood earthquake about two to three miles northwest of Inglewood City Hall (in the adjacent Venice Quadrangle) is suggestive of liquefaction. In his discussion of the effects of the June 21, 1920, Inglewood earthquake, Taber described and pictured (1920,

p. 140 and Plate 14, figure 2) a “low ridge about one and one half feet high and fifteen feet broad” that crossed the furrows in a farm field in the Centinela Creek Valley just west of the boundary of the Inglewood 7.5-minute Quadrangle. He also described a depression that had developed between the ridge and another, parallel one about one hundred yards to the northeast. No evidence of paleo-seismic liquefaction has been reported. Therefore, no areas within the Inglewood Quadrangle are zoned for potential liquefaction hazard based on historic liquefaction.

Artificial Fills

Non-engineered artificial fills have not been delineated or mapped in the Inglewood Quadrangle. Consequently, no areas within the Inglewood Quadrangle are zoned for potential liquefaction hazard based on their presence.

Areas with Sufficient Existing Geotechnical Data

Borehole logs, which generally included penetration test data and reasonably sufficient lithologic descriptions, were used to determine the areas of high liquefaction susceptibility. Accordingly, these areas are zoned as potential liquefaction hazard areas based on adequate existing geotechnical data.

Areas with Insufficient Existing Geotechnical Data

Younger alluvium deposited in stream channel and active wash areas generally lacks adequate geotechnical borehole information. The soil characteristics and ground-water conditions in these cases are assumed to be similar to deposits where subsurface information is available. The stream channel and active wash deposits, therefore, are included in the liquefaction zone for reasons presented in criteria item 4a above.

ACKNOWLEDGMENTS

The author thanks the staff of the California Department of Transportation (Caltrans) and the Department of Water Resources; the Los Angeles County Department of Public Works; the California Regional Water Quality Control Board - Los Angeles Region; and John Tinsley of the USGS for their assistance in the collection of subsurface borehole data. Special thanks to Bob Moskovitz, Teri McGuire, Scott Shepherd, Barbara Wanish and Joy Arther for their GIS operations support, and for designing and plotting the graphic displays associated with the liquefaction zone map and this report.

REFERENCES

American Society for Testing and Materials, 1999, Standard test method for penetration test and split-barrel sampling of soils, Test Method D1586-99, *in* Annual Book of ASTM Standards, v. 4.08.

- Barrows, A.G., 1974, A review of the geology and earthquake history of the Newport-Inglewood structural zone, southern California: California Department of Conservation, Division of Mines and Geology, Special Report 114, 115 p.
- California Department of Conservation, Division of Mines and Geology, 1997, Guidelines for evaluating and mitigating seismic hazards in California, Special Publication 117, 74 p.
- California Department of Conservation, Division of Mines and Geology, 2000, Recommended criteria for delineating seismic hazard zones in California, Special Publication 118, 12 p.
- California Department of Public Works, 1952, Draft of Report of Referee, West Coast Basin Reference, in the Superior Court of the State of California in and for the County of Los Angeles, California Water Service Company, a corporation, *et al.*, Plaintiffs, vs. City of Compton, *et al.* and Alexander Abercromby, *et al.*, Defendants, no. 506806, 175 p.
- California Department of Water Resources, 1961, Planned utilization of the ground water basins of the Coastal Plain of Los Angeles County, Appendix A, Ground water geology: California Department of Water Resources Bulletin 104, 181 p.
- Castle, R.O., 1960, Geologic map of the Baldwin Hills area, California: U.S. Geological Survey Open-File Report, scale 1:12,000.
- Conkling, H., 1927, San Gabriel investigation: California Division of Water Resources Bulletin 5, 640 p.
- Cramer, C.H. and Petersen, M.D., 1996, Predominant seismic source distance and magnitude maps for Los Angeles, Orange, and Ventura counties, California: Bulletin of Seismological Society of America, v. 86, no. 5, p. 1,645-1,649.
- Hillis, D., 1933, Cracks produced by Long Beach, California, earthquake: American Association of Petroleum Geologists Bulletin, v. 17, p. 739-740.
- Leighton and Associates, Inc., 1990, Hazard reduction in Los Angeles County: Technical Appendix to the Safety Element of the Los Angeles County General Plan, Department of Regional Planning, County of Los Angeles, 2 v.
- Mendenhall, W.C., 1905, Development of underground waters in the western coastal plain region of southern California: U.S. Geological Survey Water-Supply Paper 139, 105 p.
- Morton, D.M. and Kennedy, M.P., 1989, A southern California digital 1:100,000-scale geologic map series—The Santa Ana Quadrangle—The first release: Geological Society of America Abstracts with Programs v. 21, no. 6, p. A107-A108.

- National Research Council, 1985, Liquefaction of soils during earthquakes: National Research Council Special Publication, Committee on Earthquake Engineering, National Academy Press, Washington, D.C., 240 p.
- Petersen, M.D., Bryant, W.A., Cramer, C.H., Cao, Tianqing, Reichle, M.S., Frankel, A.D., Lienkaemper, J.J., McCrory, P.A. and Schwartz, D.P., 1996, Probabilistic seismic hazard assessment for the State of California: California Department of Conservation, Division of Mines and Geology, Open File Report 96-08; U.S. Geological Survey Open File Report 96-706, 33 p.
- Poland, J.E., Garrett, A.A. and Sinnott, A., 1959, Geology, hydrology, and chemical character of ground waters in the Torrance-Santa Monica area, California: U.S. Geological Survey Water Supply Paper 1461, 425 p.; Plate 1, north half, scale 1:31,680.
- Saucedo, G., unpublished, Digital geologic map of the Inglewood 7.5-minute Quadrangle, California Department of Conservation, Division of Mines and Geology, map resolution scale 1:24,000.
- Seed, H.B. and Idriss, I.M., 1971, Simplified procedure for evaluating soil liquefaction potential: *Journal of the Soil Mechanics and Foundations Division of ASCE*, v. 97: SM9, p. 1,249-1,273.
- Seed, H.B. and Idriss, I.M., 1982, Ground motions and soil liquefaction during earthquakes: Monograph Series, Earthquake Engineering Research Institute, Berkeley, California, 134 p.
- Seed, H.B., Idriss, I.M. and Arango, Ignacio, 1983, Evaluation of liquefaction potential using field performance data: *Journal of Geotechnical Engineering*, v. 109, no. 3, p. 458-482.
- Seed, H.B., Tokimatsu, Kohji, Harder, L.F., and Chung, R.M., 1985, Influence of SPT procedures in soil liquefaction resistance evaluations: *Journal of Geotechnical Engineering*, ASCE, v. 111, no. 12, p. 1,425-1,445.
- Seed, R.B. and Harder, L.F., 1990, SPT-based analysis of cyclic pore pressure generation and undrained residual strength: *Proceedings of the H. Bolton Seed Memorial Symposium*, v. 2, p. 351-376.
- Smith, T.C., 1996, Preliminary maps of seismic hazard zones and draft guidelines for evaluating and mitigating seismic hazards: *California Geology*, v. 49, no. 6, p. 147-150.
- Stewart, J.P., Bray, J.D., Seed, R.B. and Sitar, N., 1994, Preliminary report on the principal geotechnical aspects of the January 17, 1994 Northridge earthquake: Earthquake Engineering Research Center, College of Engineering, University of California, Berkeley, Report No. UCB/EERC-94/08.

- Taber, Stephen, 1920, The Inglewood earthquake in southern California, June 21, 1920: Bulletin of the Seismological Society of America, v. 10, no. 3, p. 129-145.
- Tinsley, J.C. and Fumal, T.E., 1985, Mapping Quaternary sedimentary deposits for areal variations in shaking response, *in* Ziony, J.I., *editor*, Evaluating earthquake hazards in the Los Angeles Region—An earth science perspective: U.S. Geological Survey Professional Paper 1360, p. 101-125.
- Tinsley, J.C., Youd, T.L., Perkins, D.M. and Chen, A.T.F., 1985, Evaluating liquefaction potential, *in* Ziony, J.I., *editor*, Evaluating earthquake hazards in the Los Angeles region — An earth science perspective: U.S. Geological Survey Professional Paper 1360, p. 263-316.
- U.S. Geological Survey, 1930 edition, Topographic map of the Inglewood 6-Minute Quadrangle, scale 1:24,000, contour interval 5 feet.
- U.S. Geological Survey, 1942 reprinted edition, Topographic map of the Watts 6-Minute Quadrangle, scale 1:24,000, contour interval 5 feet.
- U.S. Geological Survey, 1924a edition, Topographic map of the Torrance 6-Minute Quadrangle, scale 1:24,000, contour interval 5 feet.
- U.S. Geological Survey, 1924b edition, Topographic map of the Compton 6-Minute Quadrangle, scale 1:24,000, contour interval 5 feet.
- Weber, F.H., Jr., Hsu, E.Y., Saul, R.B., Tan, S.S. and Treiman, J.A., 1982, Slope stability and geology of the Baldwin Hills, Los Angeles County, California: California Division of Mines and Geology Special Report 152, 93 p., scale 1:4,800
- Wood, H.O., 1933, Preliminary report on the Long Beach earthquake: Bulletin of the Seismological Society of America, v. 23, p. 43-56.
- Youd, T.L., 1973, Liquefaction, flow and associated ground failure: U.S. Geological Survey Circular 688, 12 p.
- Youd, T.L., 1991, Mapping of earthquake-induced liquefaction for seismic zonation: Earthquake Engineering Research Institute, Proceedings, Fourth International Conference on Seismic Zonation, v. 1, p. 111-138.
- Youd, T.L. and Idriss, I.M., 1997, *editors*, Proceedings of the NCEER workshop on evaluation of liquefaction resistance of soils: National Center for Earthquake Engineering Research Technical Report NCEER-97-0022, 276 p.
- Youd, T.L. and Perkins, D.M., 1978, Mapping liquefaction-induced ground failure potential: Journal of Geotechnical Engineering, v. 104, p. 433-446.

AIR PHOTOS

Fairchild Aerial Surveys, Flight 113, 1927, Frames 131-138 and 171-178, black and white, vertical, scale 1:19,000.

U.S. Geological Survey, NAPP Aerial Photography, May 31, 1994, Flight 6858, Frames 28-32 and 45-49, black and white, vertical, scale 1:40,000.

SECTION 2 EARTHQUAKE-INDUCED LANDSLIDE EVALUATION REPORT

Earthquake-Induced Landslide Zones in the Inglewood 7.5-Minute Quadrangle, Los Angeles County, California

By

Michael A. Silva and Pamela J. Irvine

**California Department of Conservation
Division of Mines and Geology**

PURPOSE

The Seismic Hazards Mapping Act (the Act) of 1990 (Public Resources Code, Chapter 7.8, Division 2) directs the California Department of Conservation (DOC), Division of Mines and Geology (DMG) to delineate Seismic Hazard Zones. The purpose of the Act is to reduce the threat to public health and safety and to minimize the loss of life and property by identifying and mitigating seismic hazards. Cities, counties, and state agencies are directed to use seismic hazard zone maps prepared by DMG in their land-use planning and permitting processes. The Act requires that site-specific geotechnical investigations be performed prior to permitting most urban development projects within the hazard zones. Evaluation and mitigation of seismic hazards are to be conducted under guidelines established by the California State Mining and Geology Board (DOC, 1997; also available on the Internet at <http://gmw.consrv.ca.gov/shmp/webdocs/sp117.pdf>).

This section of the evaluation report summarizes seismic hazard zone mapping for earthquake-induced landslides in the Inglewood 7.5-minute Quadrangle. This section, along with Section 1 (addressing liquefaction), and Section 3 (addressing earthquake shaking), form a report that is one of a series that summarizes the preparation of seismic hazard zone maps within the state (Smith, 1996). Additional information on seismic

hazard zone mapping in California can be accessed on DMG's Internet web page:
<http://gmw.consrv.ca.gov/shmp/webdocs/sp117.pdf>.

BACKGROUND

Landslides triggered by earthquakes historically have been a significant cause of earthquake damage. In California, large earthquakes such as the 1971 San Fernando, 1989 Loma Prieta, and 1994 Northridge earthquakes triggered landslides that were responsible for destroying or damaging numerous structures, blocking major transportation corridors, and damaging life-line infrastructure. Areas that are most susceptible to earthquake-induced landslides are steep slopes in poorly cemented or highly fractured rocks, areas underlain by loose, weak soils, and areas on or adjacent to existing landslide deposits. These geologic and terrain conditions exist in many parts of California, including numerous hillside areas that have already been developed or are likely to be developed in the future. The opportunity for strong earthquake ground shaking is high in many parts of California because of the presence of numerous active faults. The combination of these factors constitutes a significant seismic hazard throughout much of California, including the hillside areas of the Inglewood Quadrangle.

METHODS SUMMARY

The mapping of earthquake-induced landslide hazard zones presented in this report is based on the best available terrain, geologic, geotechnical, and seismological data. If unavailable or significantly outdated, new forms of these data were compiled or generated specifically for this project. The following were collected or generated for this evaluation:

- Digital terrain data were used to provide an up-to-date representation of slope gradient and slope aspect in the study area
- Geologic mapping was used to provide an accurate representation of the spatial distribution of geologic materials in the study area. In addition, a map of existing landslides, whether triggered by earthquakes or not, was prepared
- Geotechnical laboratory test data were collected and statistically analyzed to quantitatively characterize the strength properties and dynamic slope stability of geologic materials in the study area
- Seismological data in the form of DMG probabilistic shaking maps and catalogs of strong-motion records were used to characterize future earthquake shaking within the mapped area

The data collected for this evaluation were processed into a series of GIS layers using commercially available software. A slope stability analysis was performed using the Newmark method of analysis (Newmark, 1965), resulting in a map of landslide hazard potential. The earthquake-induced landslide hazard zone was derived from the landslide

hazard potential map according to criteria developed in a DMG pilot study (McCrink and Real, 1996) and adopted by the State Mining and Geology Board (DOC, 2000).

SCOPE AND LIMITATIONS

The methodology used to make this map is based on earthquake ground-shaking estimates, geologic material-strength characteristics and slope gradient. These data are gathered from a variety of outside sources. Although the selection of data used in this evaluation was rigorous, the quality of the data is variable. The State of California and the Department of Conservation make no representations or warranties regarding the accuracy of the data gathered from outside sources.

Earthquake-induced landslide zone maps are intended to prompt more detailed, site-specific geotechnical investigations as required by the Act. As such, these zone maps identify areas where the potential for earthquake-induced landslides is relatively high. Due to limitations in methodology, it should be noted that these zone maps do not necessarily capture all potential earthquake-induced landslide hazards. Earthquake-induced ground failures that are not addressed by this map include those associated with ridge-top spreading and shattered ridges. It should also be noted that no attempt has been made to map potential run-out areas of triggered landslides. It is possible that such run-out areas may extend beyond the zone boundaries. The potential for ground failure resulting from liquefaction-induced lateral spreading of alluvial materials, considered by some to be a form of landsliding, is not specifically addressed by the earthquake-induced landslide zone or this report. See Section 1, Liquefaction Evaluation Report for the Inglewood Quadrangle, for more information on the delineation of liquefaction zones.

The remainder of this report describes in more detail the mapping data and processes used to prepare the earthquake-induced landslide zone map for the Inglewood Quadrangle. The information is presented in two parts. Part I covers physiographic, geologic and engineering geologic conditions in the study area. Part II covers the preparation of landslide hazard potential and landslide zone maps.

PART I

PHYSIOGRAPHY

Study Area Location and Physiography

The Inglewood Quadrangle covers an area of about 62 square miles within the Los Angeles Basin. The study area is densely populated and includes all or parts of the cities of Carson, Compton, Gardena, Hawthorne, Inglewood, Lawndale, Los Angeles, Redondo Beach, and Torrance, as well as unincorporated areas of Los Angeles County. Major transportation routes traversing the Inglewood Quadrangle include the Century Freeway (I-105), the San Diego Freeway (I-405), and the Harbor Freeway (I-110).

The Inglewood Quadrangle, located at the northwestern end of the Peninsular Ranges geomorphic province, contains a northwest-trending uplifted area consisting of the Baldwin Hills and the Rosecrans Hills. The hills are geomorphic features associated with uplift along the Newport –Inglewood structural zone. Older Quaternary units are exposed in these strongly dissected hills, and elevations range from approximately 75 feet to over 400 feet. To the east, Holocene alluvium lies upon the regional coastal basin, also known as the Downey Plain. The sediments overlie an erosional surface of late Pleistocene age. To the west of the Rosecrans Hills is an elevated plain underlain by older Quaternary alluvium. This area contains a drainage basin, with Holocene sediments, that narrows to the south into the Dominguez Channel. Within the southwestern corner of the quadrangle Pleistocene dune sand overlies older alluvial deposits.

The main drainage courses within the quadrangle are the Dominguez Channel, Compton Creek, and Centinela Creek.

Digital Terrain Data

The calculation of slope gradient is an essential part of the evaluation of slope stability under earthquake conditions. An accurate slope gradient calculation begins with an up-to-date map representation of the earth's surface. Within the Inglewood Quadrangle, a Level 2 digital elevation model (DEM) was obtained from the USGS (U.S. Geological Survey, 1993). This DEM, which was prepared from the 7.5-minute quadrangle topographic contours that are based on 1963 aerial photography, has a 10-meter horizontal resolution and a 7.5-meter vertical accuracy.

A slope map was made from the DEM using a third-order, finite difference, center-weighted algorithm (Horn, 1981). The DEM was also used to make a slope aspect map. The manner in which the slope and aspect maps were used to prepare the zone map will be described in subsequent sections of this report.

GEOLOGY

Bedrock and Surficial Geology

A digital map obtained from the U.S. Geological Survey (Tinsley, unpublished) was used as a base to prepare a geologic map of the Inglewood Quadrangle for this project. Other geologic maps reviewed include Castle (1960), Weber and others (1982), Poland and others (1959), CDWR (1961), and a digital map prepared by the Southern California Areal Mapping Project (SCAMP, unpublished). Geologic contacts were modified using the sources listed above, air photos (Fairchild, 1927), and older topographic maps (USGS, 1930, 1942, 1924a, and 1924b). In the field, observations were made of exposures, aspects of weathering, and general surface expression of the geologic units. In addition, the relation of the various geologic units to development and abundance of landslides was noted.

Bedrock exposures in the Inglewood Quadrangle are limited to the northwest corner of the map where strata have been uplifted, folded, and faulted along the Newport-Inglewood structural zone to form the Baldwin Hills. The Baldwin Hills are primarily composed of marine sediments of Pleistocene age. Stratigraphic correlation of Plio-Pleistocene and Quaternary strata within the Los Angeles Basin is difficult because of rapid lateral facies changes resulting from fluctuations in the paleo-shoreline and the time-transgressive nature of the faunal assemblages (Quinn and others, 1997). Because of the current lack of well-defined Quaternary correlations and nomenclature, the formation designations used in this study for the Baldwin Hills area should be regarded as generalized and informal.

The oldest Quaternary unit mapped in the Inglewood Quadrangle is the lower Pleistocene Inglewood Formation (Qi; "A" formation of Castle, 1960), which is exposed along fault traces on the south slope of the Baldwin Hills. It is composed of thinly interbedded siltstone and fine sandstone deposited in a shallow marine environment. Unconformably overlying the Inglewood Formation, is the Pleistocene San Pedro Formation (Qsp; "B" formation of Castle, 1960), which consists of poorly consolidated, fine- to coarse-grained sand interbedded with thin beds and lenses of gravel deposited in a near-shore marine environment ("Qc" in Weber and others, 1982). Also included in this unit are fluvial sand and gravel with local beds of clayey silt ("Qb" in Weber and others, 1982). A reddish brown, well-cemented and resistant, locally pebbly or gravelly, silty sand caps some of the ridges in this area and is designated older alluvium (Qoa; "Qf" in Weber and others, 1982; "cap deposits" in Castle, 1960).

Quaternary sediments covering the remainder of the Inglewood Quadrangle include older eolian deposits (Qoe), which form a portion of the El Segundo Sand Hills that extends into the southwest corner of the map, older alluvium (Qoa) deposited around the margin of the Baldwin Hills and on the elevated plain and Rosecrans Hills to the south, younger alluvial-fan deposits (Qyf) just west of the center of the quadrangle, and younger floodplain and stream deposits (Qya2) in the northeastern and south-central portion of the map as well as along the Centinela Creek drainage. Small, surficial landslides (Qls and Qls?) have occurred on the steeper slopes and along roadcuts in the Baldwin Hills. A more detailed discussion of the Quaternary deposits in the Inglewood Quadrangle can be found in Section 1.

Landslide Inventory

As a part of the geologic data compilation, an inventory of existing landslides in the Inglewood Quadrangle was prepared (Irvine, unpublished) by using previous work done in the area (Weber and others, 1979; Weber and others, 1982) and by combining field observations, analysis of aerial photos, and interpretation of landforms on current and older topographic maps. Aerial photos used for landslide interpretation include those from Fairchild (1927) and USGS (1994) (see Air Photos in References). Landslides were mapped and digitized at a scale of 1:24,000. For each landslide included on the map a number of characteristics (attributes) were compiled. These characteristics include the confidence of interpretation (definite, probable and questionable) and other properties, such as activity, thickness, and associated geologic unit(s). Landslides rated as definite

and probable were carried into the slope stability analysis. Landslides rated as questionable were not carried into the slope stability analysis due to the uncertainty of their existence. The completed hand-drawn landslide map was scanned, digitized, and the attributes were compiled in a database. A version of this landslide inventory is included with Plate 2.1.

ENGINEERING GEOLOGY

Geologic Material Strength

To evaluate the stability of geologic materials under earthquake conditions, the geologic map units described above were ranked and grouped on the basis of their shear strength. Generally, the primary source for rock shear-strength measurements is geotechnical reports prepared by consultants on file with local government permitting departments. Shear-strength data for the rock units identified on the Inglewood Quadrangle geologic map were obtained from the City of Los Angeles, Department of Building and Safety and other sources (see Appendix A). For the Inglewood Quadrangle, shear test values used to calculate rock strength were borrowed from adjacent quadrangles. All shear tests for Q_i and additional values for Q_{sp} were obtained from the Hollywood Quadrangle. The locations of rock and soil samples taken for shear testing are shown on Plate 2.1.

Shear strength data gathered from the above sources were compiled for each geologic map unit. Geologic units were grouped on the basis of average angle of internal friction (average ϕ) and lithologic character. Average (mean and median) ϕ values for each geologic map unit and corresponding strength group are summarized in Table 2.1. For most of the geologic strength groups in the map area, a single shear strength value was assigned and used in our slope stability analysis. A geologic material strength map was made based on the groupings presented in Tables 2.1 and 2.2, and this map provides a spatial representation of material strength for use in the slope stability analysis.

Additional values for Q_{oa} and Q_{sp} were obtained from the Venice Quadrangle. No shear tests were available for Q_{yf} and this geologic unit was added to existing groups on the basis of lithologic and stratigraphic similarities.

The results of the grouping of geologic materials in the Inglewood Quadrangle are in Tables 2.1 and 2.2.

INGLEWOOD QUADRANGLE SHEAR STRENGTH GROUPINGS							
	Formation Name	Number Tests	Mean/ Median Phi	Mean/ Median (Group phi) (deg)	Group Mean/Median C (psf)	No Data: Similar Geologic Strength	Phi Values Used in Stability Analysis
GROUP 1	Qoe Qi Qoa Qsp	54 33 41 30	31.1/31 29.9/29 29.8/31 28.2/30	30/31	279/222		30
GROUP 2	Qya2	3	26.3/26	26.3/26	300/300	Qyf	26
GROUP 3	Qls	-	-	-	-	-	15

Table 2.1. Summary of the Shear Strength Statistics for the Inglewood Quadrangle.

SHEAR STRENGTH GROUPS FOR THE INGLEWOOD QUADRANGLE		
GROUP 1	GROUP 2	GROUP 3
Qi Qoa Qoe Qsp	Qya2 Qyf	Qls

Table 2.2. Summary of the Shear Strength Groups for the Inglewood Quadrangle.

Existing Landslides

The strength characteristics of existing landslides (Qls) must be based on tests of the materials along the landslide slip surface. Ideally, shear tests of slip surfaces formed in each mapped geologic unit would be used. However, this amount of information is rarely available, and for the preparation of the earthquake-induced landslide zone map it has been assumed that all landslides within the quadrangle have the same slip surface strength parameters. We collect and use primarily “residual” strength parameters from laboratory tests of slip surface materials tested in direct shear or ring shear test equipment. Back-calculated strength parameters, if the calculations appear to have been performed appropriately, have also been used.

PART II

EARTHQUAKE-INDUCED LANDSLIDE HAZARD POTENTIAL

Design Strong-Motion Record

To evaluate earthquake-induced landslide hazard potential in the study area, a method of dynamic slope stability analysis developed by Newmark (1965) was used. The Newmark method analyzes dynamic slope stability by calculating the cumulative down-slope displacement for a given earthquake strong-motion time history. As implemented for the preparation of earthquake-induced landslide zones, the Newmark method necessitates the selection of a design earthquake strong-motion record to provide the “ground shaking opportunity.” For the Inglewood Quadrangle, selection of a strong motion record was based on an estimation of probabilistic ground motion parameters for modal magnitude, modal distance, and peak ground acceleration (PGA). The parameters were estimated from maps prepared by DMG for a 10% probability of being exceeded in 50 years (Petersen and others, 1996). The parameters used in the record selection are:

Modal Magnitude:	6.8 to 7.0
Modal Distance:	2.5 km
PGA:	0.43 to 0.49 g

The strong-motion record selected for the slope stability analysis in the Inglewood Quadrangle was the Channel 3 (north horizontal component) University of Southern California Station #14 recording from the magnitude 6.7 Northridge earthquake (Trifunac and others, 1994). This record had a source to recording site distance of 8.5 km and a peak ground acceleration of 0.69 g. The selected strong-motion record was not scaled or otherwise modified prior to its use in the analysis.

Displacement Calculation

The design strong-motion record was used to develop a relationship between landslide displacement and yield acceleration (a_y), defined as the earthquake horizontal ground acceleration above which landslide displacements take place. This relationship was prepared by integrating the design strong-motion record twice for a given acceleration value to find the corresponding displacement, and the process was repeated for a range of acceleration values (Jibson, 1993). The resulting curve in Figure 2.1 represents the full spectrum of displacements that can be expected for the design strong-motion record. This curve provides the required link between anticipated earthquake shaking and estimates of displacement for different combinations of geologic materials and slope gradient, as described in the Slope Stability Analysis section below.

The amount of displacement predicted by the Newmark analysis provides an indication of the relative amount of damage that could be caused by earthquake-induced landsliding. Displacements of 30, 15 and 5 cm were used as criteria for rating levels of earthquake-induced landslide hazard potential based on the work of Youd (1980), Wilson and Keefer (1983), and a DMG pilot study for earthquake-induced landslides (McCrink and Real, 1996). Applied to the curve in Figure 2.1, these displacements correspond to yield accelerations of 0.076, 0.129 and 0.232 g. Because these yield acceleration values are derived from the design strong-motion record, they represent the ground shaking opportunity thresholds that are significant in the Inglewood Quadrangle.

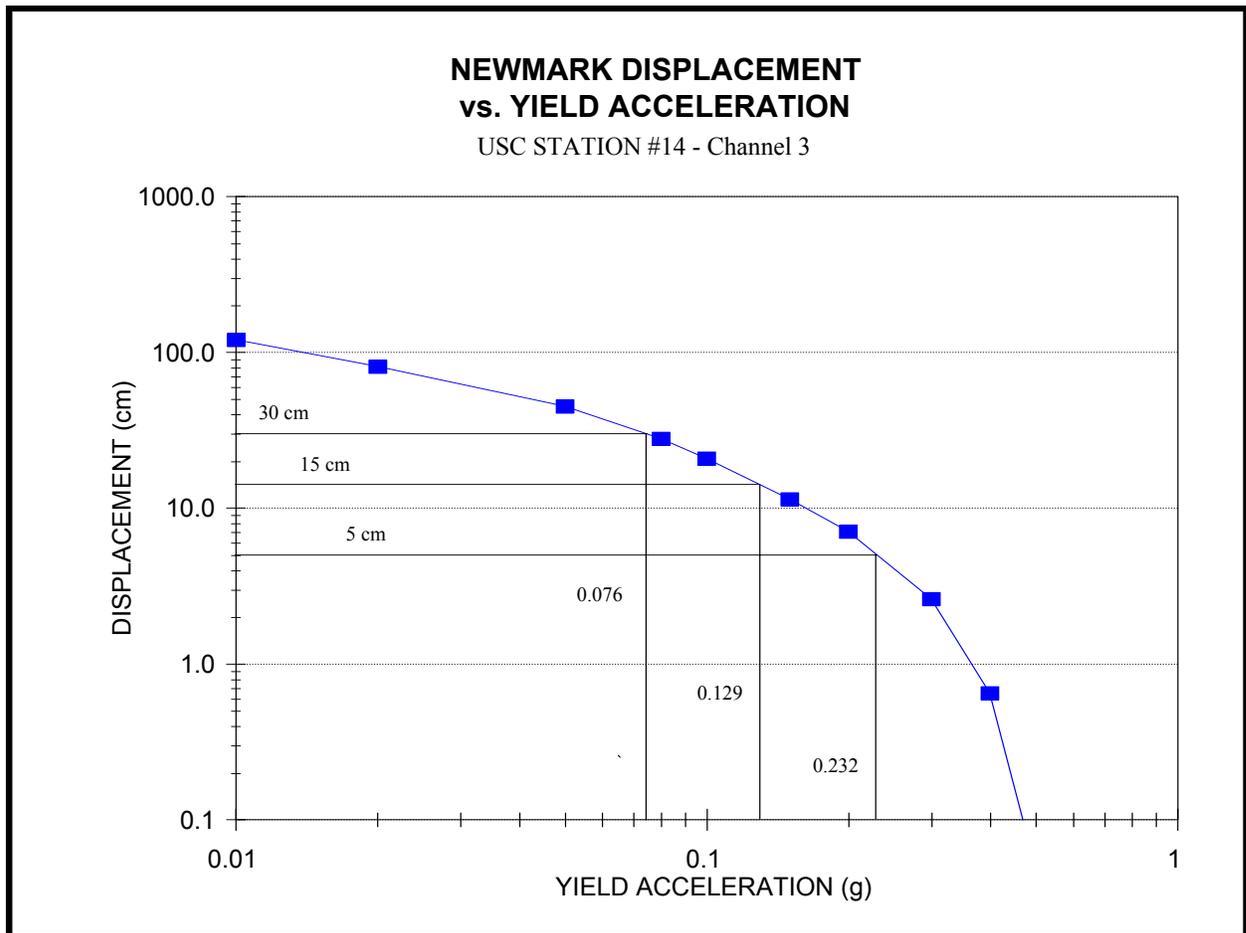


Figure 2.1. Yield acceleration vs. Newmark displacement for the USC Station #14 strong-motion record from the 17 January 1994 Northridge, California Earthquake.

Slope Stability Analysis

A slope stability analysis was performed for each geologic material strength group at slope increments of 1 degree. An infinite-slope failure model under unsaturated slope

conditions was assumed. A factor of safety was calculated first, followed by the calculation of yield acceleration from Newmark's equation:

$$a_y = (FS - 1)g \sin \alpha$$

where FS is the Factor of Safety, g is the acceleration due to gravity, and α is the direction of movement of the slide mass, in degrees measured from the horizontal, when displacement is initiated (Newmark, 1965). For an infinite slope failure α is the same as the slope angle.

The yield accelerations resulting from Newmark's equations represent the susceptibility to earthquake-induced failure of each geologic material strength group for a range of slope gradients. Based on the relationship between yield acceleration and Newmark displacement shown in Figure 2.1, hazard potentials were assigned as follows:

1. If the calculated yield acceleration was less than 0.076g, Newmark displacement greater than 30 cm is indicated, and a HIGH hazard potential was assigned (H on Table 2.3)
2. If the calculated yield acceleration fell between 0.076g and 0.129g, Newmark displacement between 15 cm and 30 cm is indicated, and a MODERATE hazard potential was assigned (M on Table 2.3)
3. If the calculated yield acceleration fell between 0.129g and 0.232g, Newmark displacement between 5 cm and 15 cm is indicated, and a LOW hazard potential was assigned (L on Table 2.3)
4. If the calculated yield acceleration was greater than 0.232g, Newmark displacement of less than 5 cm is indicated, and a VERY LOW potential was assigned (VL on Table 2.3)

Table 2.3 summarizes the results of the stability analyses. The earthquake-induced landslide hazard potential map was prepared by combining the geologic material-strength map and the slope map according to this table.

INGLEWOOD QUADRANGLE HAZARD POTENTIAL MATRIX										
		SLOPE CATEGORY (Percent Slope)								
Geologic Material Group	Mean Phi	I 0-14	II 14-19	III 19-27	IV 27-34	V 36-36	VI 36-42	VII 42-45	VIII 45-50	IX >50
1	30	VL	VL	VL	VL	L	L	L	H	H
2	26	VL	VL	VL	L	L	M	H	H	H
3	15	L	M	H	H	H	H	H	H	H

Table 2.3. Hazard Potential Matrix for Earthquake-Induced Landslides in the Inglewood Quadrangle. Shaded area indicates hazard potential levels included within the hazard zone. H = High, M = Moderate, L = Low, VL = Very Low.

EARTHQUAKE-INDUCED LANDSLIDE HAZARD ZONE

Criteria for Zoning

Earthquake-induced landslide zones were delineated using criteria adopted by the California State Mining and Geology Board (DOC, 2000). Under these criteria, earthquake-induced landslide hazard zones are defined as areas that meet one or both of the following conditions:

1. Areas that have been identified as having experienced landslide movement in the past, including all mappable landslide deposits and source areas as well as any landslide that is known to have been triggered by historic earthquake activity.
2. Areas where the geologic and geotechnical data and analyses indicate that the earth materials may be susceptible to earthquake-induced slope failure.

These conditions are discussed in further detail in the following sections.

Existing Landslides

Existing landslides typically consist of disrupted soils and rock materials that are generally weaker than adjacent undisturbed rock and soil materials. Previous studies indicate that existing landslides can be reactivated by earthquake movements (Keefer, 1984). Earthquake-triggered movement of existing landslides is most pronounced in

steep head scarp areas and at the toe of existing landslide deposits. Although reactivation of deep-seated landslide deposits is less common (Keefer, 1984), a significant number of deep-seated landslide movements have occurred during, or soon after, several recent earthquakes. Based on these observations, all existing landslides with a definite or probable confidence rating are included within the earthquake-induced landslide hazard zone.

Geologic and Geotechnical Analysis

Based on the conclusions of a pilot study performed by DMG (McCrink and Real, 1996), it has been concluded that earthquake-induced landslide hazard zones should encompass all areas that have a High, Moderate or Low level of hazard potential (see Table 2.3). This would include all areas where the analyses indicate earthquake displacements of 5 centimeters or greater. Areas with a Very Low hazard potential, indicating less than 5 centimeters displacement, are excluded from the zone.

As summarized in Table 2.3, all areas characterized by the following geologic strength group and slope gradient conditions are included in the earthquake-induced landslide hazard zone:

1. Geologic Strength Group 3 is included for all slope gradient categories. (Note: Geologic Strength Group 3 includes all mappable landslides with a definite or probable confidence rating).
2. Geologic Strength Group 2 is included for all slopes steeper than 27 percent.
3. Geologic Strength Group 1 is included for all slopes steeper than 34 percent.

This results in less than 0.1 percent of the quadrangle lying within the earthquake-induced landslide hazard zone for the Inglewood Quadrangle.

ACKNOWLEDGMENTS

The authors would like to thank the following individuals and organizations for their assistance in obtaining the data necessary to complete this project. Geologic material strength data were collected at the City of Los Angeles with the assistance of Nicki Girmay. Technical review of the methodology was provided by Bruce Clark, Randy Jibson, Robert Larson, Scott Lindvall, and J. David Rogers, who are members of the State Mining and Geology Board's Seismic Hazards Mapping Act Advisory Committee Landslides Working Group. At DMG, special thanks to Bob Moskovitz, Teri McGuire, Scott Shepherd and Barbara Wanish for their GIS operations support, and to Barbara Wanish for designing and plotting the graphic displays associated with the hazard zone map and this report.

REFERENCES

- Brabb, E.E., 1983, Map showing direction and amount of bedding dip of sedimentary rocks in San Mateo County, California: U.S. Geological Survey Miscellaneous Investigations Series Map I-1257C, 1 sheet, scale 1:62,500.
- California Department of Conservation, Division of Mines and Geology, 1997, Guidelines for evaluating and mitigating seismic hazards in California: California Department of Conservation, Division of Mines and Geology, Special Publication 117, 74 p.
- California Department of Conservation, Division of Mines and Geology, 2000, Recommended criteria for delineating seismic hazard zones: California Department of Conservation, Division of Mines and Geology, Special Publication 118, 12 p.
- California Department of Water Resources, 1961, Planned utilization of the ground water basins of the coastal plain of Los Angeles County, Appendix A, Ground water geology: California Department of Water Resources, Bulletin No. 104, 181 p.
- Castle, R.O., 1960, Geologic map of the Baldwin Hills area, California: U.S. Geological Survey Open-File Report, scale 1:12,000.
- GeoSAR Consortium, 1995, Year 1: Research and development status report for GeoSAR, a radar-based terrain mapping project: U.S. Government's Advanced Research Projects Agency Contract Order No. B335/00, 135 p.
- GeoSAR Consortium, 1996, Year 1: Research and development status report for GeoSAR, a radar-based terrain mapping project: U.S. Government's Advanced Research Projects Agency Contract Order No. B378/00, 70 p.
- Horn, B.K.P., 1981, Hill shading and the reflectance map: Proceedings of the IEEE, v. 69, no. 1, p. 14-47.
- Irvine, P.J., unpublished, Landslide inventory of the Inglewood 7.5' Quadrangle, Los Angeles County, California: California Division of Mines and Geology, scale 1:24,000.
- Jibson, R.W., 1993, Predicting earthquake-induced landslide displacements using Newmark's sliding block analysis: Transportation Research Board, National Research Council, Transportation Research Record 1411, 17 p.
- Keefer, D.K., 1984, Landslides caused by earthquakes: Geological Society of America Bulletin, v. 95, no. 4, p. 406-421.
- McCrink, T.P. and Real, C.R., 1996, Evaluation of the Newmark method for mapping earthquake-induced landslide hazards in the Laurel 7-1/2 minute Quadrangle, Santa Cruz County, California: California Division of Mines and Geology Final Technical

Report for U.S. Geological Survey Contract 143-93-G-2334, U.S. Geological Survey, Reston, Virginia, 31 p.

Newmark, N.M., 1965, Effects of earthquakes on dams and embankments: *Geotechnique*, v. 15, no. 2, p. 139-160.

Petersen, M.D., Bryant, W.A., Cramer, C.H., Cao, T., Reichle, M.S., Frankel, A.D., Lienkaemper, J.J., McCrory, P.A. and Schwartz, D.P., 1996, Probabilistic seismic hazard assessment for the State of California: California Department of Conservation, Division of Mines and Geology, Open File Report 96-08; U.S. Geological Survey Open File Report 96-706, 33 p.

Poland, J.E., Garrett, A.A. and Sinotte, A., 1959, Geology, hydrology, and chemical character of ground waters in the Torrance-Santa Monica area, California: U.S. Geological Survey Water Supply Paper 1461, 425 p.; Plate 1, north half, scale 1:31,680.

Quinn, J.P., Ponti, D.J., Hillhouse, J.W. and Powell, C.L. II, 1997, Quaternary chronostratigraphic constraints on deformation and blind thrust faulting, northern Los Angeles basin: Final Technical Report 1434-95-G-2523 to the U.S. Geological Survey.

Smith, T.C., 1996, Preliminary maps of seismic hazard zones and draft guidelines for evaluating and mitigating seismic hazards: *California Geology*, v. 49, no. 6, p. 147-150.

Southern California Areal Mapping Project, unpublished, Digital geologic map of the Inglewood 7.5-Minute Quadrangle, scale 1:24,000.

Tinsley, J.C., unpublished, Digital Quaternary geologic map of the Inglewood 7.5-Minute Quadrangle, California: U. S. Geological Survey: compilation scale 1:24,000.

Trifunac, M.D., Todorovska, M.I., and Ivanovic, S.S., 1994, A note on distribution of uncorrected peak ground accelerations during the Northridge, California earthquake of 17 January 1994: *Soil Dynamic and Earthquake Engineering*, v. 13, no. 3, p. 187-196.

U.S. Geological Survey, 1993, Digital Elevation Models: National Mapping Program, Technical Instructions, Data Users Guide 5, 48 p.

U.S. Geological Survey, 1930 edition, Topographic map of the Inglewood 6-Minute Quadrangle, scale 1:24,000, contour interval 5 feet.

U.S. Geological Survey, 1942 reprinted edition, Topographic map of the Watts 6-Minute Quadrangle, scale 1:24,000, contour interval 5 feet.

U.S. Geological Survey, 1924a edition, Topographic map of the Torrance 6-Minute Quadrangle, scale 1:24,000, contour interval 5 feet.

- U.S. Geological Survey, 1924b edition, Topographic map of the Compton 6-Minute Quadrangle, scale 1:24,000, contour interval 5 feet.
- Weber, F.H., Jr., Hsu, E.Y., Saul, R.B., Tan, S.S. and Treiman, J.A., 1982, Slope Stability and Geology of the Baldwin Hills, Los Angeles County, California: California Division of Mines and Geology Special Report 152, 93 p., scale 1:4,800.
- Weber, F.H., Jr., Treiman, J.A., Tan, S.S. and Miller, R.V., 1979, Landslides in the Los Angeles region, California: effects of the February-March rains: California Division of Mines and Geology Open-File Report 79-4, 277 p., scale 1:250,000.
- Wilson, R.C. and Keefer, D.K., 1983, Dynamic analysis of a slope failure from the 1979 Coyote Lake, California, earthquake: Bulletin of the Seismological Society of America, v. 73, p. 863-877.
- Youd, T.L., 1980, Ground failure displacement and earthquake damage to buildings: American Society of Civil Engineers Conference on Civil Engineering and Nuclear Power, 2d, Knoxville, Tennessee, 1980, v. 2, p. 7-6-2 to 7-6-26.

AIR PHOTOS

- Fairchild Aerial Surveys, Flight 113, 1927, Frames 131-138 and 171-178, black and white, vertical, scale 1:19,000.
- U.S. Geological Survey NAPP Aerial Photography, May 31, 1994, Flight 6858, Frames 28-32 and 45-49, black and white, vertical, scale 1:40,000.

APPENDIX A SOURCE OF ROCK STRENGTH DATA

SOURCE	NUMBER OF TESTS SELECTED
City of Los Angeles, Department of Building and Safety	140
CDMG Special Report 152 (Weber and others, 1982)	19
CDMG Hospital Site Reviews	3
Total Number of Shear Tests	162

SECTION 3

GROUND SHAKING EVALUATION REPORT

Potential Ground Shaking in the Inglewood 7.5-Minute Quadrangle, Los Angeles County, California

By

**Mark D. Petersen*, Chris H. Cramer*, Geoffrey A. Faneros,
Charles R. Real, and Michael S. Reichle**

**California Department of Conservation
Division of Mines and Geology**

***Formerly with DMG, now with U.S. Geological Survey**

PURPOSE

The Seismic Hazards Mapping Act (the Act) of 1990 (Public Resources Code, Chapter 7.8, Division 2) directs the California Department of Conservation (DOC), Division of Mines and Geology (DMG) to delineate Seismic Hazard Zones. The purpose of the Act is to reduce the threat to public health and safety and to minimize the loss of life and property by identifying and mitigating seismic hazards. Cities, counties, and state agencies are directed to use the Seismic Hazard Zone Maps in their land-use planning and permitting processes. The Act requires that site-specific geotechnical investigations be performed prior to permitting most urban development projects within the hazard zones. Evaluation and mitigation of seismic hazards are to be conducted under guidelines established by the California State Mining and Geology Board (DOC, 1997; also available on the Internet at <http://gmw.consrv.ca.gov/shmp/webdocs/sp117.pdf>).

This section of the evaluation report summarizes the ground motions used to evaluate liquefaction and earthquake-induced landslide potential for zoning purposes. Included are ground motion and related maps, a brief overview on how these maps were prepared, precautionary notes concerning their use, and related references. The maps provided

herein are presented at a scale of approximately 1:150,000 (scale bar provided on maps), and show the full 7.5-minute quadrangle and portions of the adjacent eight quadrangles. They can be used to assist in the specification of earthquake loading conditions *for the analysis of ground failure* according to the “Simple Prescribed Parameter Value” method (SPPV) described in the site investigation guidelines (California Department of Conservation, 1997). Alternatively, they can be used as a basis for comparing levels of ground motion determined by other methods with the statewide standard.

This section and Sections 1 and 2 (addressing liquefaction and earthquake-induced landslide hazards) constitute a report series that summarizes development of seismic hazard zone maps in the state. Additional information on seismic hazard zone mapping in California can be accessed on DMG’s Internet homepage: <http://www.conservation.ca.gov/CGS/index.htm>

EARTHQUAKE HAZARD MODEL

The estimated ground shaking is derived from the statewide probabilistic seismic hazard evaluation released cooperatively by the California Department of Conservation, Division of Mines and Geology, and the U.S. Geological Survey (Petersen and others, 1996). That report documents an extensive 3-year effort to obtain consensus within the scientific community regarding fault parameters that characterize the seismic hazard in California. Fault sources included in the model were evaluated for long-term slip rate, maximum earthquake magnitude, and rupture geometry. These fault parameters, along with historical seismicity, were used to estimate return times of moderate to large earthquakes that contribute to the hazard.

The ground shaking levels are estimated for each of the sources included in the seismic source model using attenuation relations that relate earthquake shaking with magnitude, distance from the earthquake, and type of fault rupture (strike-slip, reverse, normal, or subduction). The published hazard evaluation of Petersen and others (1996) only considers uniform firm-rock site conditions. In this report, however, we extend the hazard analysis to include the hazard of exceeding peak horizontal ground acceleration (PGA) at 10% probability of exceedance in 50 years on spatially uniform conditions of rock, soft rock, and alluvium. These soil and rock conditions approximately correspond to site categories defined in Chapter 16 of the Uniform Building Code (ICBO, 1997), which are commonly found in California. We use the attenuation relations of Boore and others (1997), Campbell (1997), Sadigh and others (1997), and Youngs and others (1997) to calculate the ground motions.


The seismic hazard maps for ground shaking are produced by calculating the hazard at sites separated by about 5 km. Figures 3.1 through 3.3 show the hazard for PGA at 10% probability of exceedance in 50 years assuming the entire map area is firm rock, soft rock, or alluvial site conditions respectively. The sites where the hazard is calculated are represented as dots and ground motion contours as shaded regions. The quadrangle of interest is outlined by bold lines and centered on the map. Portions of the eight adjacent

INGLEWOOD 7.5 MINUTE QUADRANGLE AND PORTIONS OF ADJACENT QUADRANGLES

10% EXCEEDANCE IN 50 YEARS PEAK GROUND ACCELERATION (g)

1998

FIRM ROCK CONDITIONS

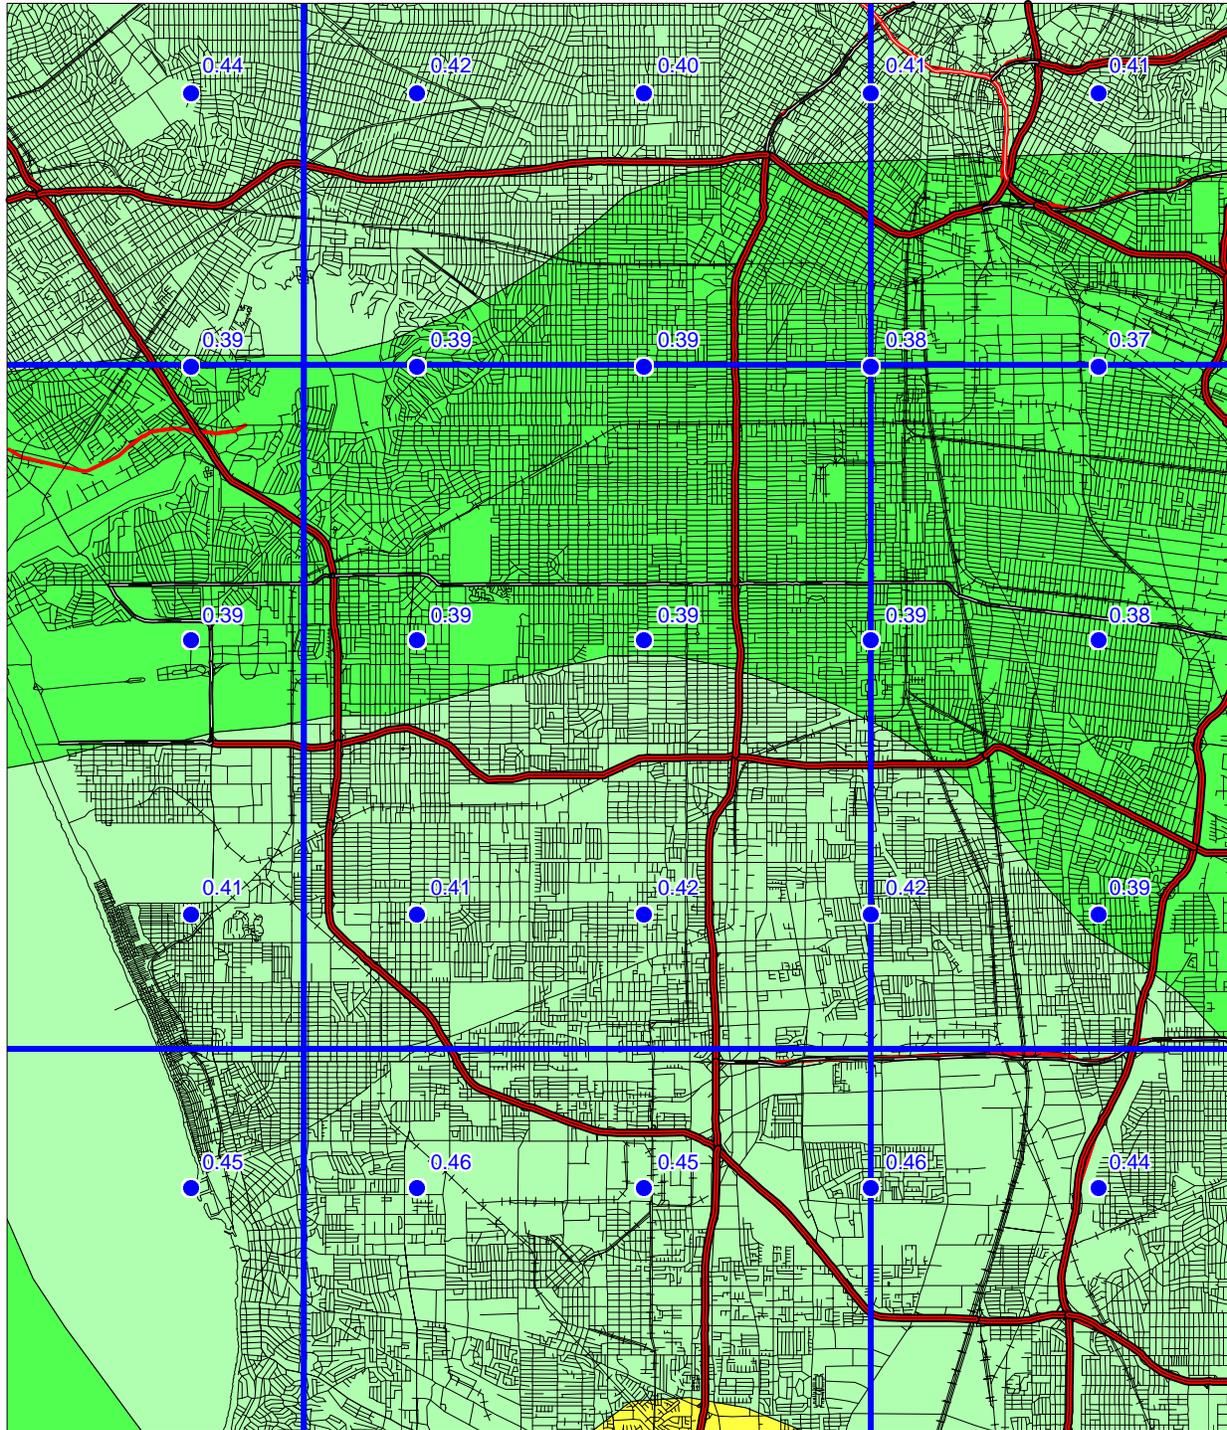

Base map modified from MapInfo StreetWorks ©1998 MapInfo Corporation



Department of Conservation
Division of Mines and Geology




Figure 3.1

INGLEWOOD 7.5 MINUTE QUADRANGLE AND PORTIONS OF ADJACENT QUADRANGLES


10% EXCEEDANCE IN 50 YEARS PEAK GROUND ACCELERATION (g)

1998

SOFT ROCK CONDITIONS

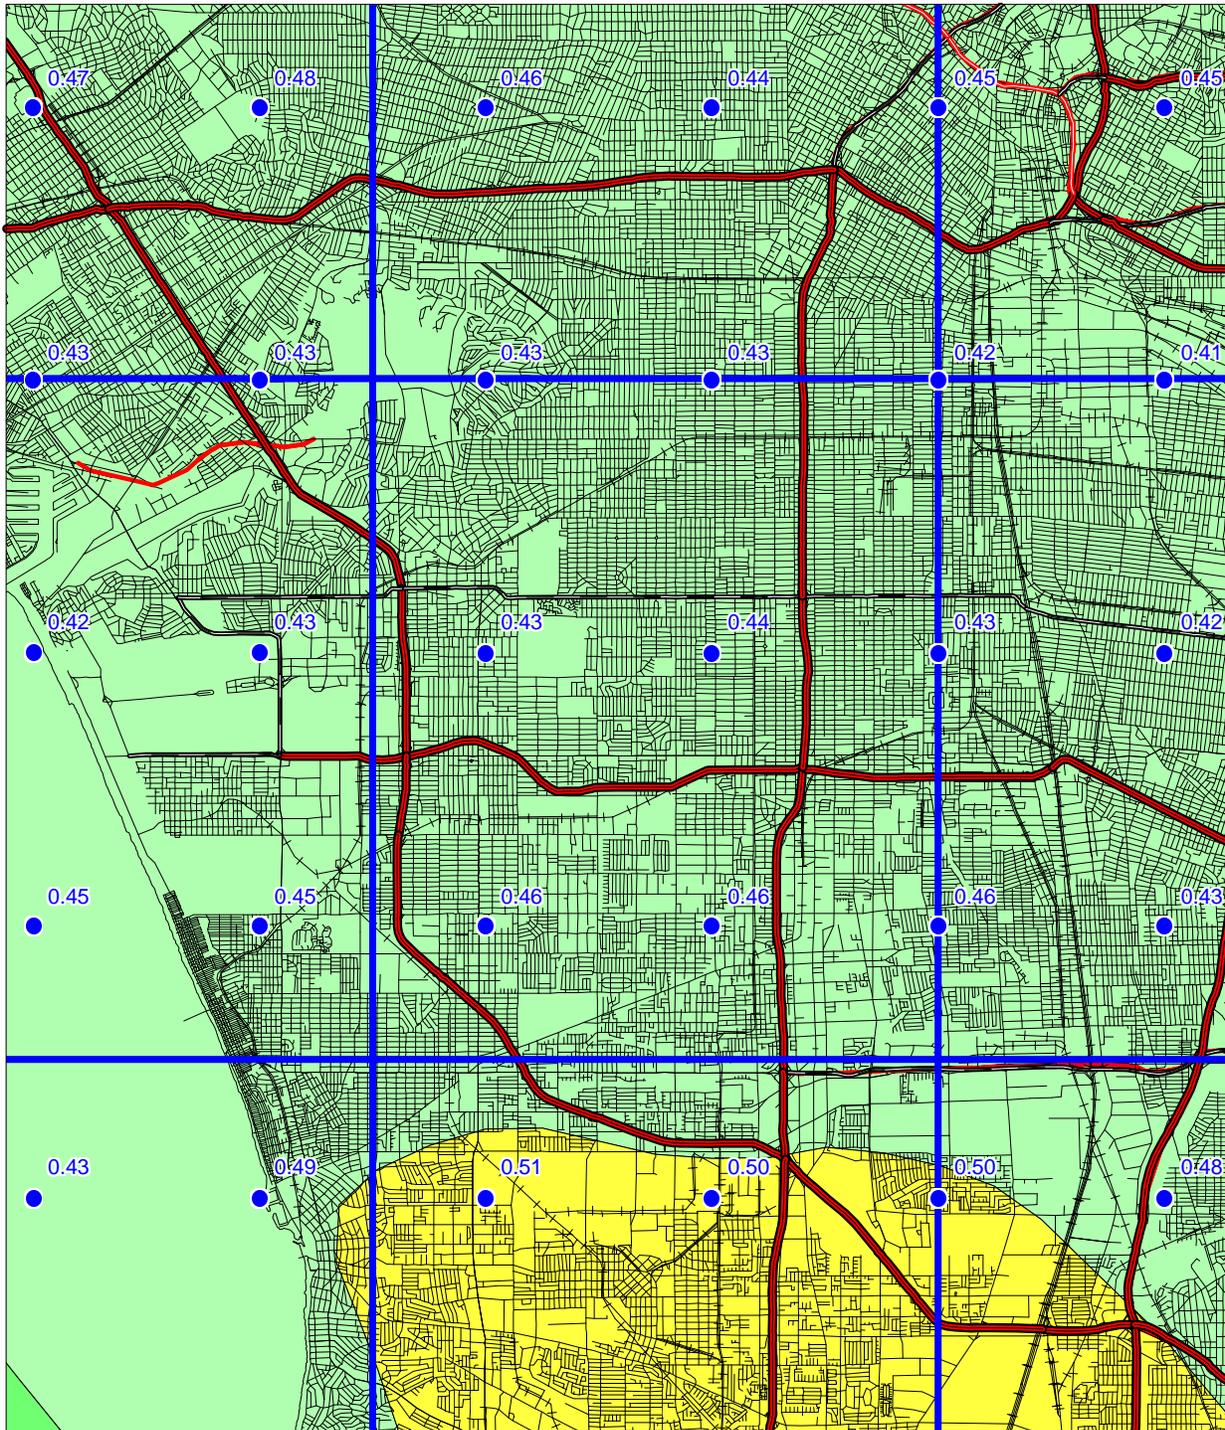

Base map modified from MapInfo StreetWorks © 1998 MapInfo Corporation



Department of Conservation
Division of Mines and Geology




Figure 3.2

INGLEWOOD 7.5 MINUTE QUADRANGLE AND PORTIONS OF ADJACENT QUADRANGLES


10% EXCEEDANCE IN 50 YEARS PEAK GROUND ACCELERATION (g)

1998

ALLUVIUM CONDITIONS

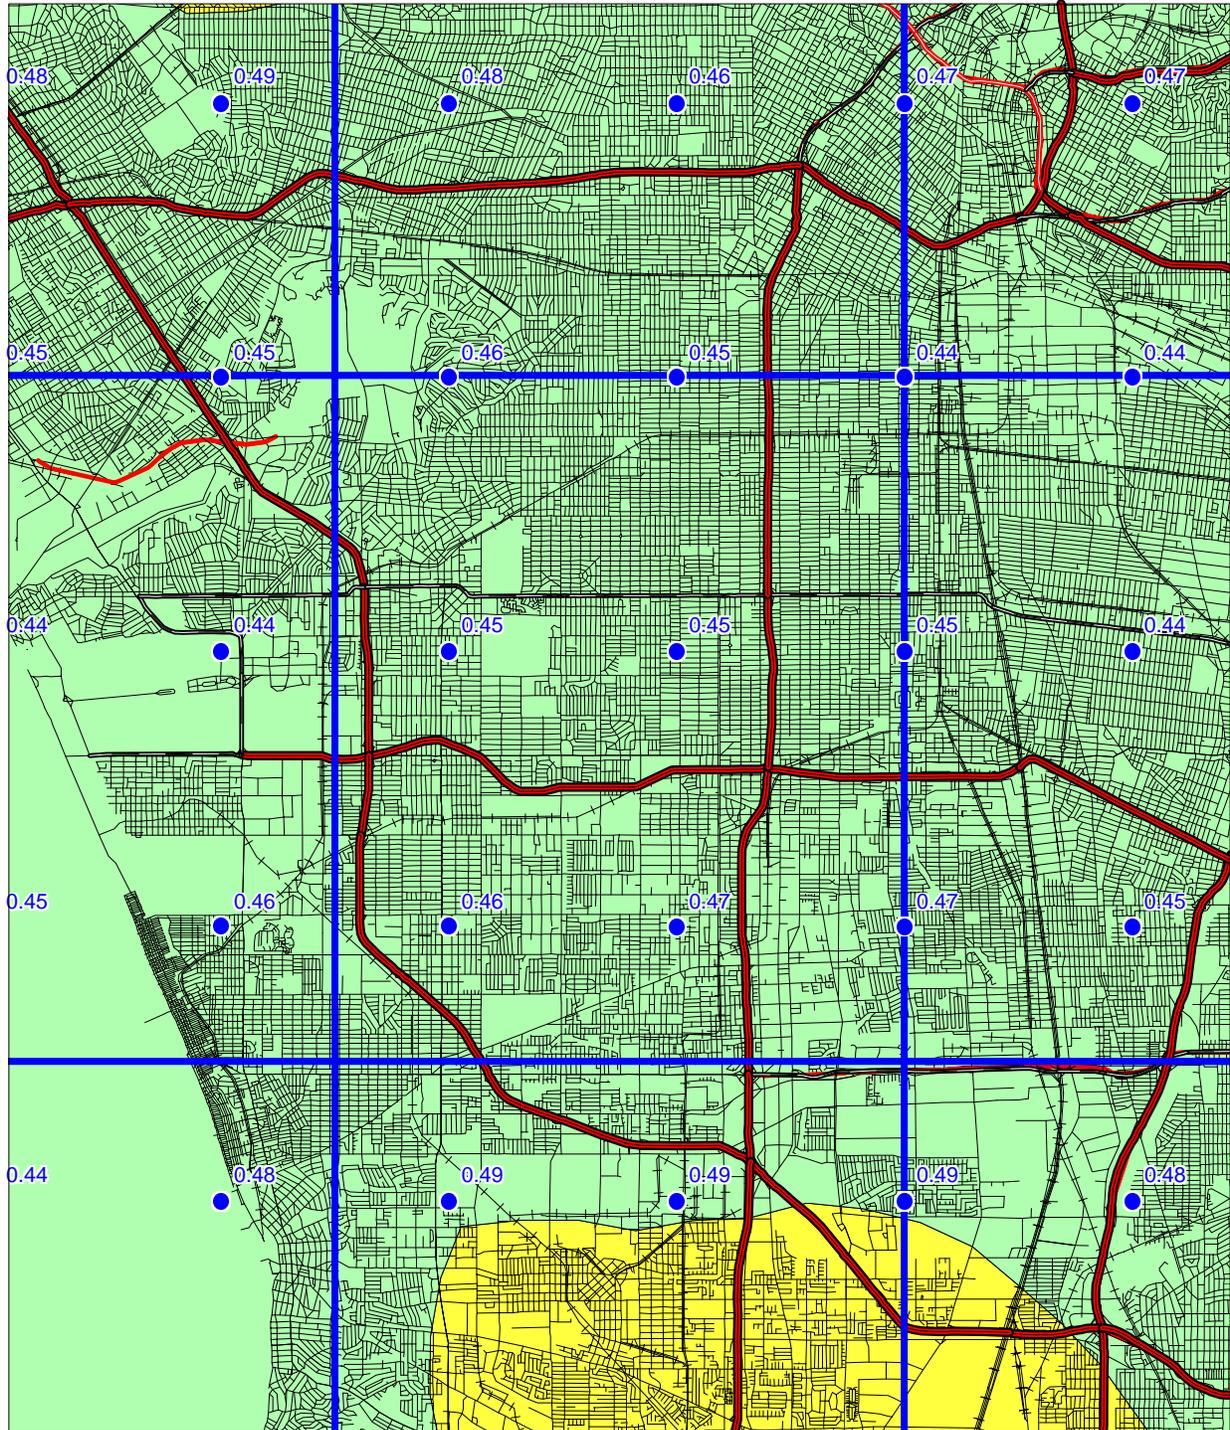

Base map modified from MapInfo Street Works ©1998 MapInfo Corporation



Department of Conservation
Division of Mines and Geology



Figure 3.3

quadrangles are also shown so that the trends in the ground motion may be more apparent. We recommend estimating ground motion values by selecting the map that matches the actual site conditions, and interpolating from the calculated values of PGA rather than the contours, since the points are more accurate.

APPLICATIONS FOR LIQUEFACTION AND LANDSLIDE HAZARD ASSESSMENTS

Deaggregation of the seismic hazard identifies the contribution of each of the earthquakes (various magnitudes and distances) in the model to the ground motion hazard for a particular exposure period (see Cramer and Petersen, 1996). The map in Figure 3.4 identifies the magnitude and the distance (value in parentheses) of the earthquake that contributes most to the hazard at 10% probability of exceedance in 50 years on alluvial site conditions (*predominant earthquake*). This information gives a rationale for selecting a seismic record or ground motion level in evaluating ground failure. However, it is important to keep in mind that more than one earthquake may contribute significantly to the hazard at a site, and those events can have markedly different magnitudes and distances. For liquefaction hazard the predominant earthquake magnitude from Figure 3.4 and PGA from Figure 3.3 (alluvium conditions) can be used with the Youd and Idriss (1997) approach to estimate cyclic stress ratio demand. For landslide hazard the predominant earthquake magnitude and distance can be used to select a seismic record that is consistent with the hazard for calculating the Newmark displacement (Wilson and Keefer, 1983). When selecting the predominant earthquake magnitude and distance, it is advisable to consider the range of values in the vicinity of the site and perform the ground failure analysis accordingly. This would yield a range in ground failure hazard from which recommendations appropriate to the specific project can be made. Grid values for predominant earthquake magnitude and distance should **not** be interpolated at the site location, because these parameters are not continuous functions.

A preferred method of using the probabilistic seismic hazard model and the “simplified Seed-Idriss method” of assessing liquefaction hazard is to apply magnitude scaling probabilistically while calculating peak ground acceleration for alluvium. The result is a “magnitude-weighted” ground motion (liquefaction opportunity) map that can be used directly in the calculation of the cyclic stress ratio threshold for liquefaction and for estimating the factor of safety against liquefaction (Youd and Idriss, 1997). This can provide a better estimate of liquefaction hazard than use of predominate magnitude described above, because all magnitudes contributing to the estimate are used to weight the probabilistic calculation of peak ground acceleration (Real and others, 2000). Thus, large distant earthquakes that occur less frequently but contribute *more* to the liquefaction hazard are appropriately accounted for.

Figure 3.5 shows the magnitude-weighted alluvial PGA based on Idriss’ weighting function (Youd and Idriss, 1997). It is important to note that the values obtained from this map are pseudo-accelerations and should be used in the formula for factor of safety without any magnitude-scaling (a factor of 1) applied.


INGLEWOOD 7.5 MINUTE QUADRANGLE AND PORTIONS OF
ADJACENT QUADRANGLES

10% EXCEEDANCE IN 50 YEARS PEAK GROUND ACCELERATION

1998

PREDOMINANT EARTHQUAKE

Magnitude (Mw)
(Distance (km))

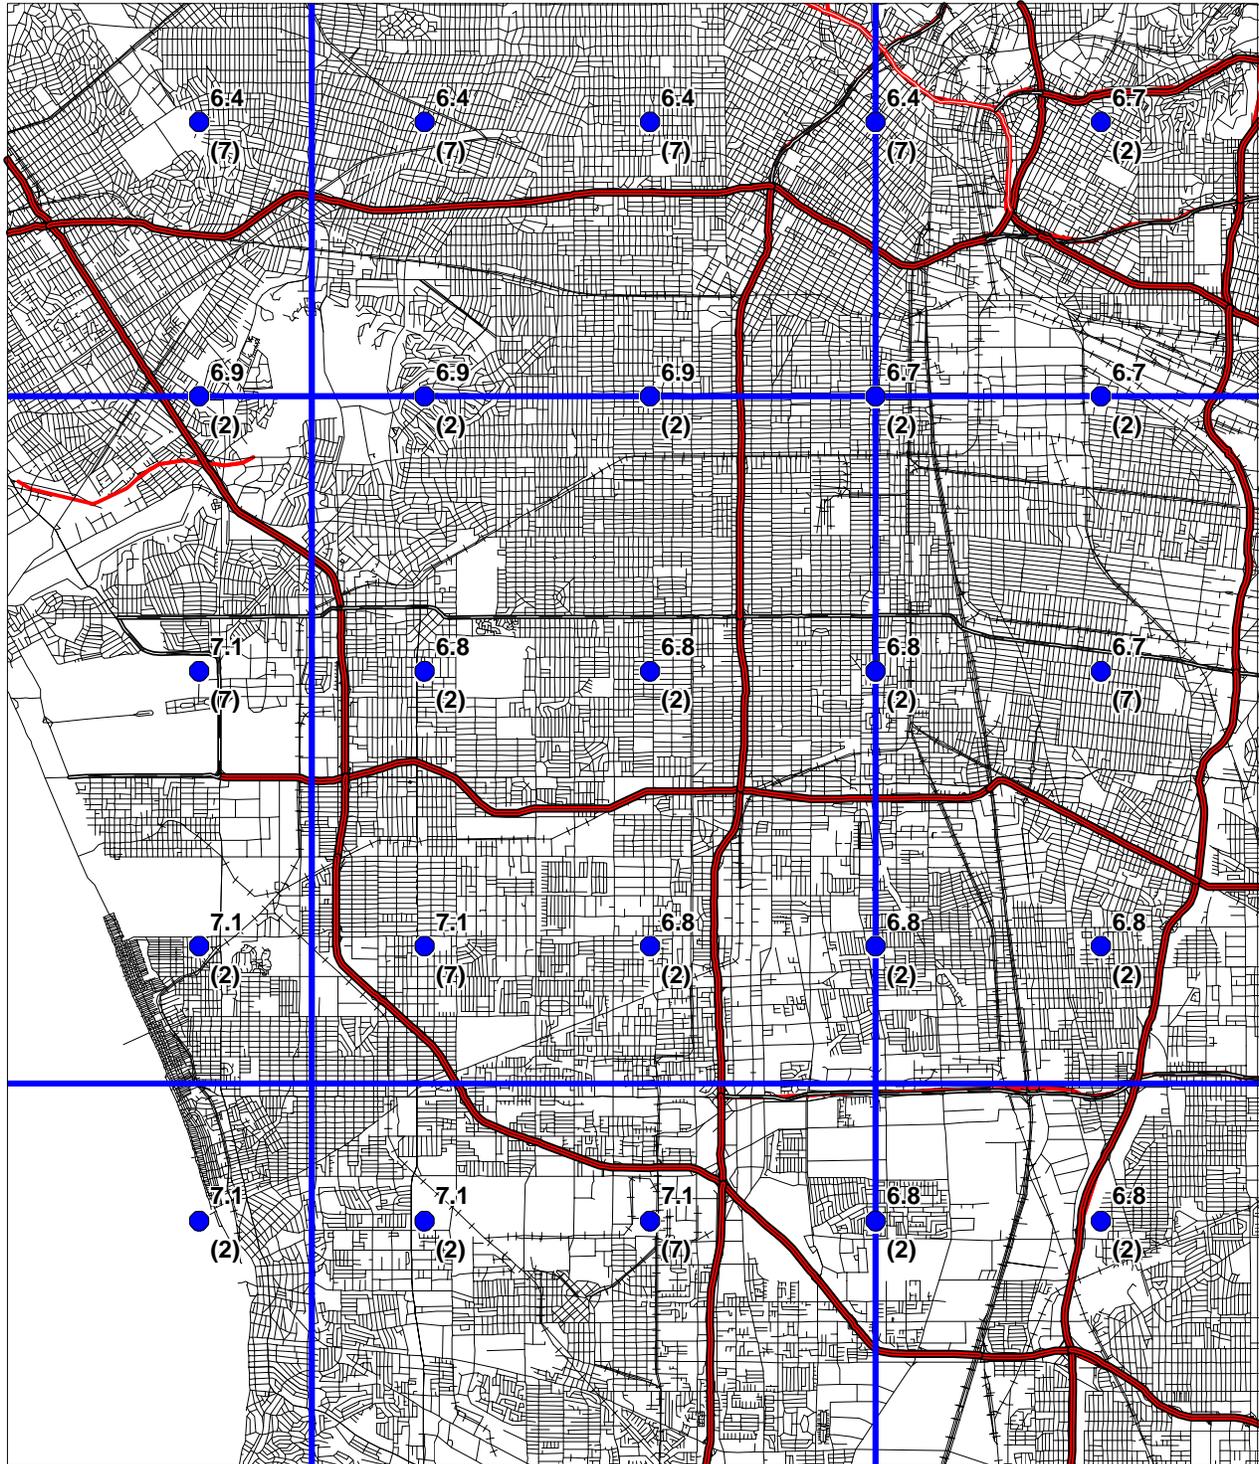

Base map modified from MapInfo StreetWorks ©1998 MapInfo Corporation



Department of Conservation
Division of Mines and Geology

Figure 3.4




SEISMIC HAZARD EVALUATION OF THE INGLEWOOD QUADRANGLE INGLEWOOD 7.5-MINUTE QUADRANGLE AND PORTIONS OF ADJACENT QUADRANGLES


10% EXCEEDANCE IN 50 YEARS MAGNITUDE-WEIGHTED PSEUDO-PEAK ACCELERATION (g)
FOR ALLUVIUM

1998

LIQUEFACTION OPPORTUNITY

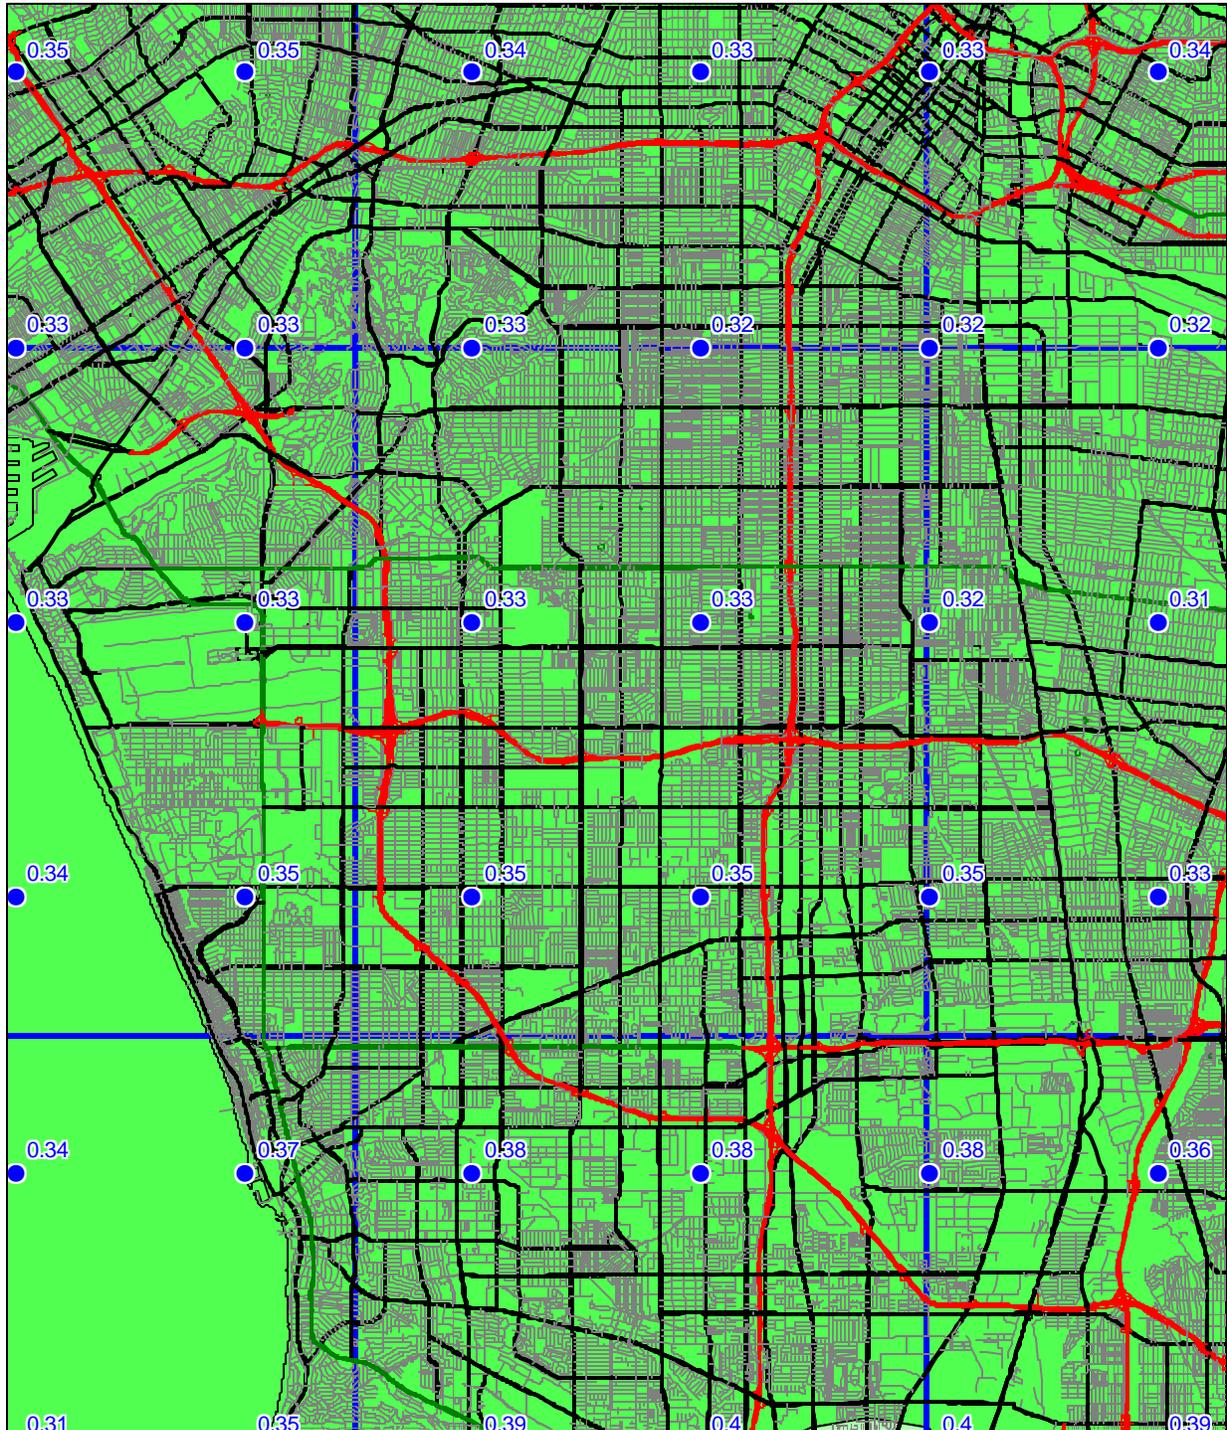

Base map from GDT



Department of Conservation
California Geological Survey



Figure 3.5

USE AND LIMITATIONS

The statewide map of seismic hazard has been developed using regional information and is *not appropriate for site specific structural design applications*. Use of the ground motion maps prepared at larger scale is limited to estimating earthquake loading conditions for preliminary assessment of ground failure at a specific location. We recommend consideration of site-specific analyses before deciding on the sole use of these maps for several reasons.

1. The seismogenic sources used to generate the peak ground accelerations were digitized from the 1:750,000-scale fault activity map of Jennings (1994). Uncertainties in fault location are estimated to be about 1 to 2 kilometers (Petersen and others, 1996). Therefore, differences in the location of calculated hazard values may also differ by a similar amount. At a specific location, however, the log-linear attenuation of ground motion with distance renders hazard estimates less sensitive to uncertainties in source location.
2. The hazard was calculated on a grid at sites separated by about 5 km (0.05 degrees). Therefore, the calculated hazard may be located a couple kilometers away from the site. We have provided shaded contours on the maps to indicate regional trends of the hazard model. However, the contours only show regional trends that may not be apparent from points on a single map. Differences of up to 2 km have been observed between contours and individual ground acceleration values. *We recommend that the user interpolate PGA between the grid point values rather than simply using the shaded contours.*
3. Uncertainties in the hazard values have been estimated to be about +/- 50% of the ground motion value at two standard deviations (Cramer and others, 1996).
4. Not all active faults in California are included in this model. For example, faults that do not have documented slip rates are not included in the source model. Scientific research may identify active faults that have not been previously recognized. Therefore, future versions of the hazard model may include other faults and omit faults that are currently considered.
5. A map of the predominant earthquake magnitude and distance is provided from the deaggregation of the probabilistic seismic hazard model. However, it is important to recognize that a site may have more than one earthquake that contributes significantly to the hazard. Therefore, in some cases earthquakes other than the predominant earthquake should also be considered.


Because of its simplicity, it is likely that the SPPV method (DOC, 1997) will be widely used to estimate earthquake shaking loading conditions for the evaluation of ground failure hazards. It should be kept in mind that ground motions at a given distance from an earthquake will vary depending on site-specific characteristics such as geology, soil properties, and topography, which may not have been adequately accounted for in the regional hazard analysis. Although this variance is represented to some degree by the

recorded ground motions that form the basis of the hazard model used to produce Figures 3.1, 3.2, and 3.3, extreme deviations can occur. More sophisticated methods that take into account other factors that may be present at the site (site amplification, basin effects, near source effects, etc.) should be employed as warranted. The decision to use the SPPV method with ground motions derived from Figures 3.1, 3.2, or 3.3 should be based on careful consideration of the above limitations, the geotechnical and seismological aspects of the project setting, and the “importance” or sensitivity of the proposed building with regard to occupant safety.

REFERENCES

- Boore, D.M., Joyner, W.B. and Fumal, T.E., 1997, Empirical near-source attenuation relationships for horizontal and vertical components of peak ground acceleration, peak ground velocity, and pseudo-absolute acceleration response spectra: *Seismological Research Letters*, v. 68, p. 154-179.
- California Department of Conservation, Division of Mines and Geology, 1997, *Guidelines for evaluating and mitigating seismic hazards in California: Special Publication 117*, 74 p.
- Campbell, K.W., 1997, Attenuation relationships for shallow crustal earthquakes based on California strong motion data: *Seismological Research Letters*, v. 68, p. 180-189.
- Cramer, C.H. and Petersen, M.D., 1996, Predominant seismic source distance and magnitude maps for Los Angeles, Orange and Ventura counties, California: *Bulletin of the Seismological Society of America*, v. 85, no. 5, p. 1645-1649.
- Cramer, C.H., Petersen, M.D. and Reichle, M.S., 1996, A Monte Carlo approach in estimating uncertainty for a seismic hazard assessment of Los Angeles, Ventura, and Orange counties, California: *Bulletin of the Seismological Society of America*, v. 86, p. 1681-1691.
- International Conference of Building Officials (ICBO), 1997, *Uniform Building Code: v. 2, Structural engineering and installation standards*, 492 p.
- Jennings, C.W., *compiler*, 1994, *Fault activity map of California and adjacent areas: California Department of Conservation, Division of Mines and Geology, California Geologic Data Map Series, map no. 8.*
- Petersen, M.D., Bryant, W.A., Cramer, C.H., Cao, T., Reichle, M.S., Frankel, A.D., Lienkaemper, J.J., McCrory, P.A. and Schwartz, D.P., 1996, Probabilistic seismic hazard assessment for the State of California: California Department of Conservation, Division of Mines and Geology Open-File Report 96-08; also U.S. Geological Survey Open-File Report 96-706, 33 p.


- Real, C.R., Petersen, M.D., McCrink, T.P. and Cramer, C.H., 2000, Seismic Hazard Deaggregation in zoning earthquake-induced ground failures in southern California: Proceedings of the Sixth International Conference on Seismic Zonation, November 12-15, Palm Springs, California, EERI, Oakland, CA.
- Sadigh, K., Chang, C.-Y., Egan, J.A., Makdisi, F. and Youngs, R.R., 1997, SEA96- A new predictive relation for earthquake ground motions in extensional tectonic regimes: *Seismological Research Letters*, v. 68, p. 190-198.
- Wilson, R.C. and Keefer, D.K., 1983, Dynamic analysis of a slope failure from the 1979 Coyote Lake, California, Earthquake: *Bulletin of the Seismological Society of America*, v. 73, p. 863-877.
- Youd, T.L. and Idriss I.M., 1997, Proceedings of the NCEER workshop on evaluation of liquefaction resistance of soils: Technical Report NCEER-97-0022, 40 p.
- Youngs, R.R., Chiou, S.-J., Silva, W.J. and Humphrey, J.R., 1997, Stochastic point-source modeling of ground motions in the Cascadia Region: *Seismological Research Letters*, v. 68, p. 74-85.

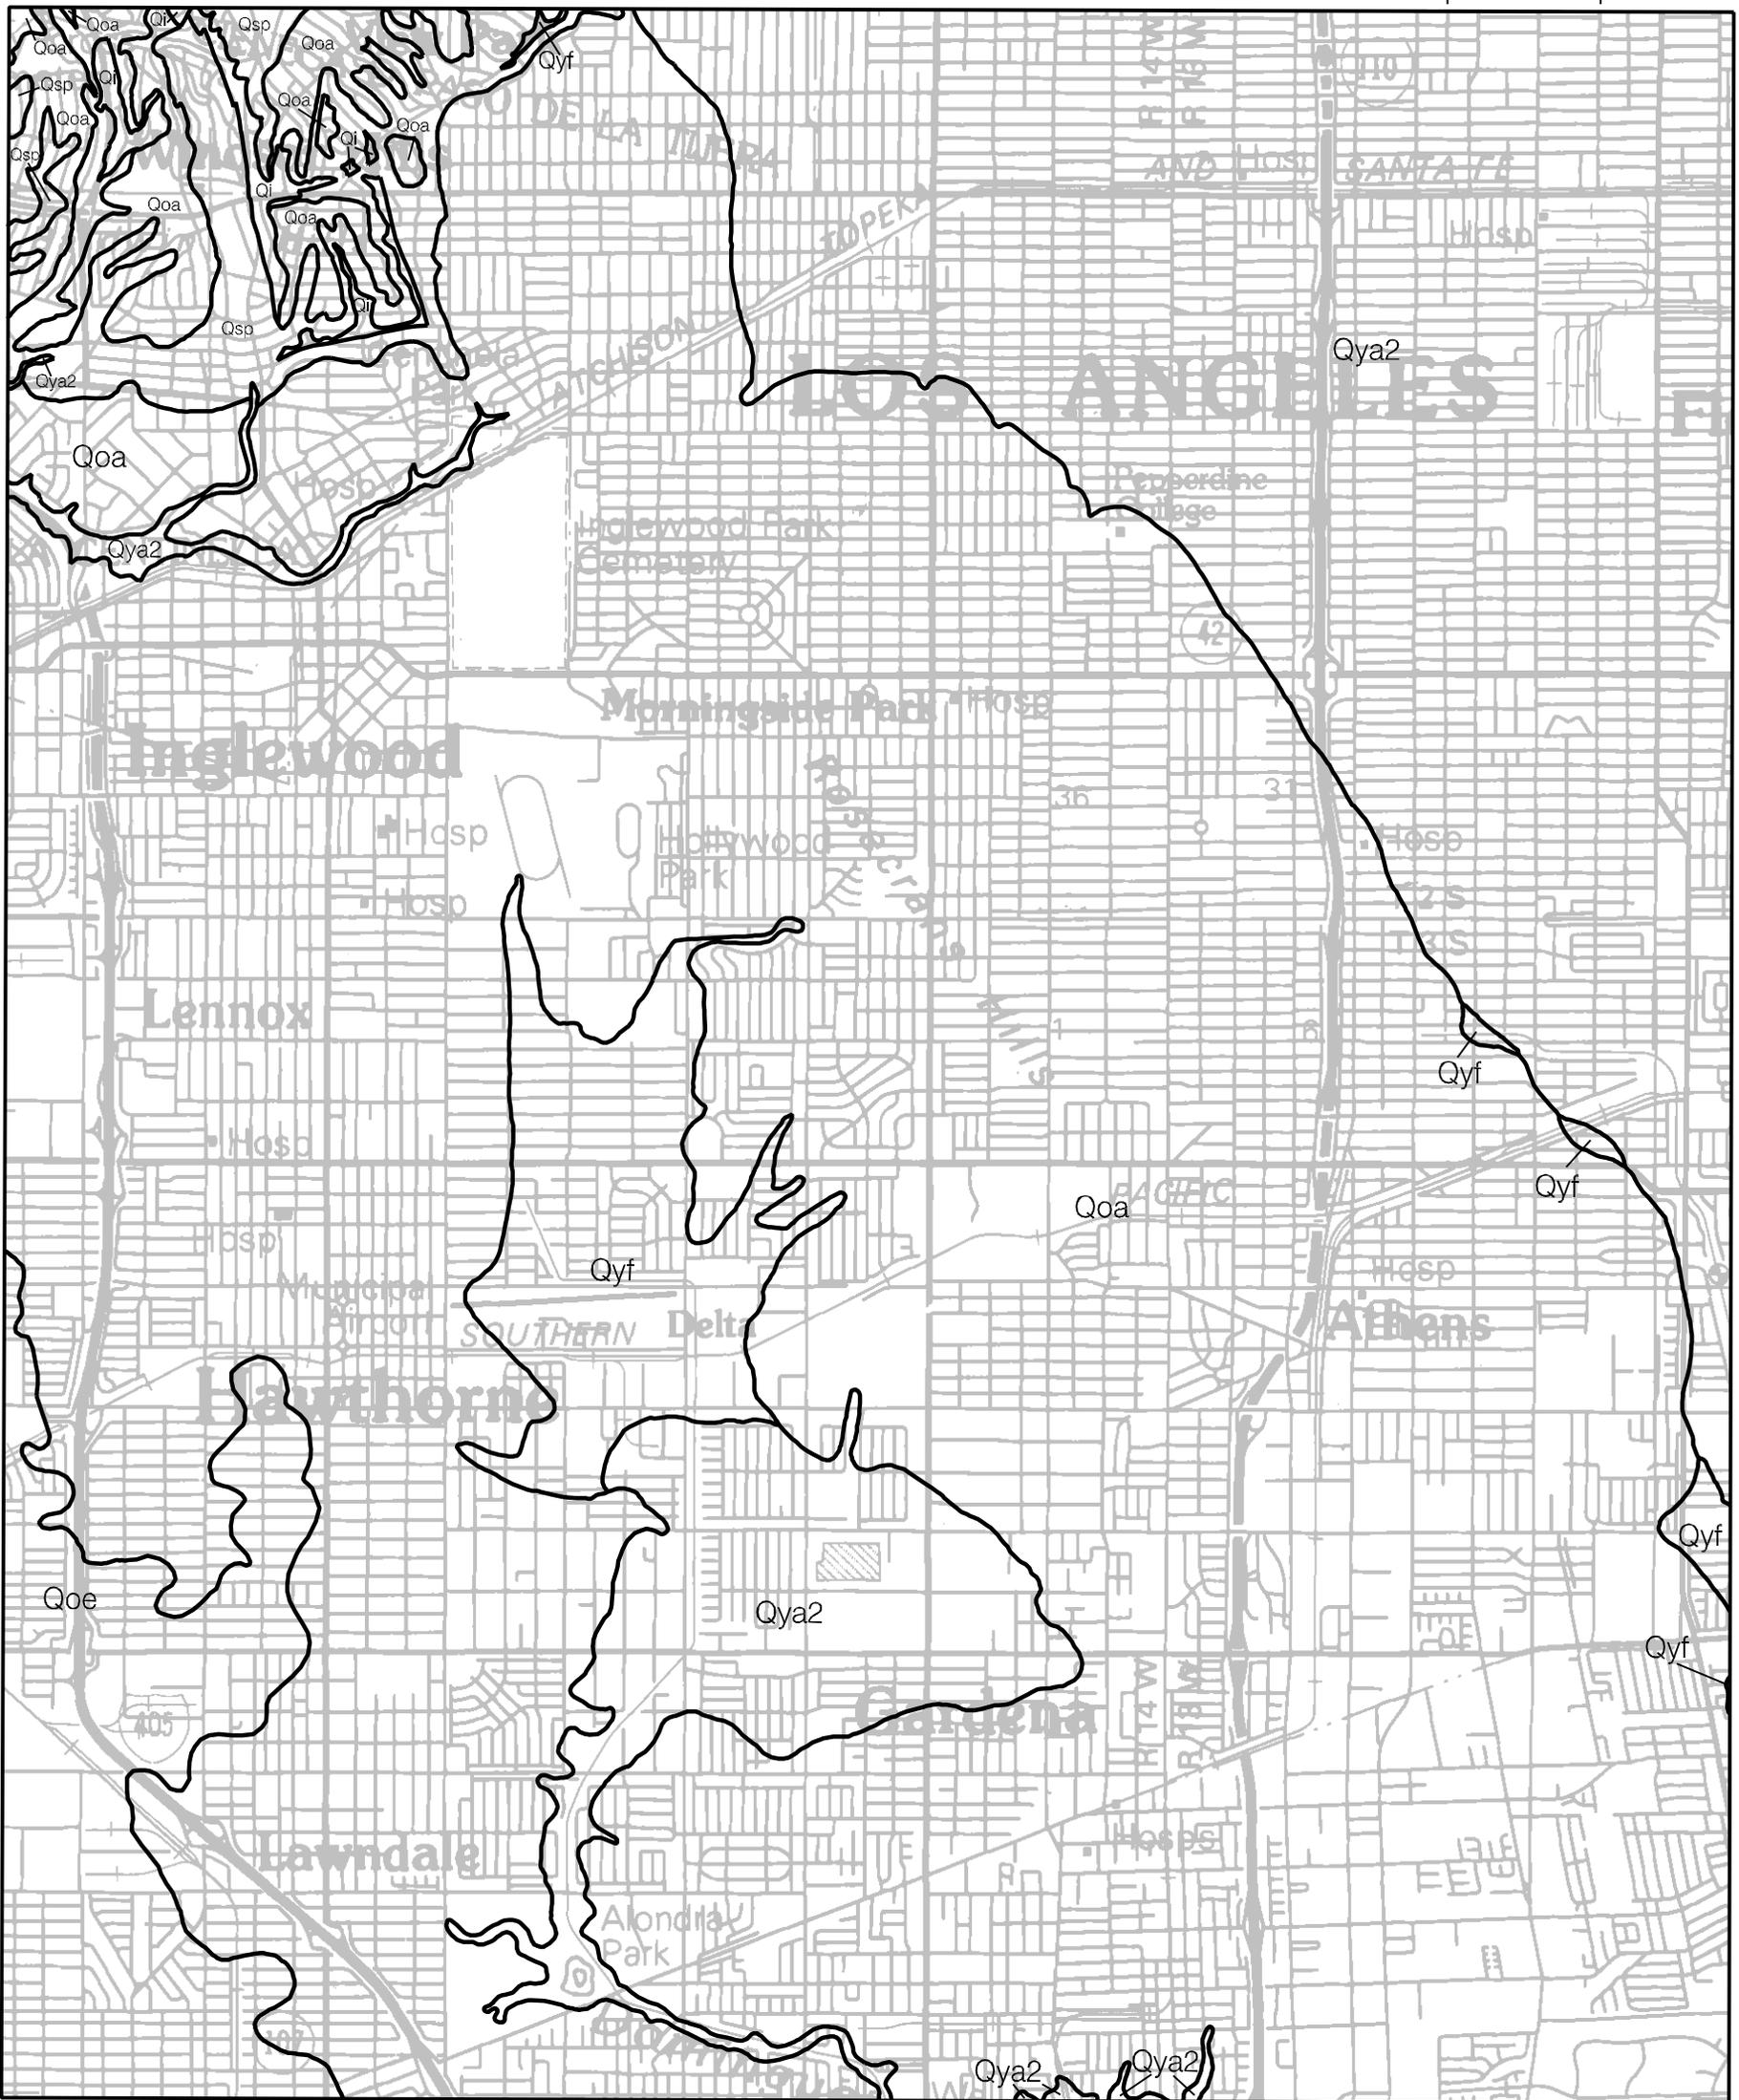

Base map enlarged from U.S.G.S. 30 x 60-minute series

Plate 1.1 Quaternary Geologic Map of the Inglewood Quadrangle.
See Geologic Conditions section in report for descriptions of the units.

ONE MILE
SCALE

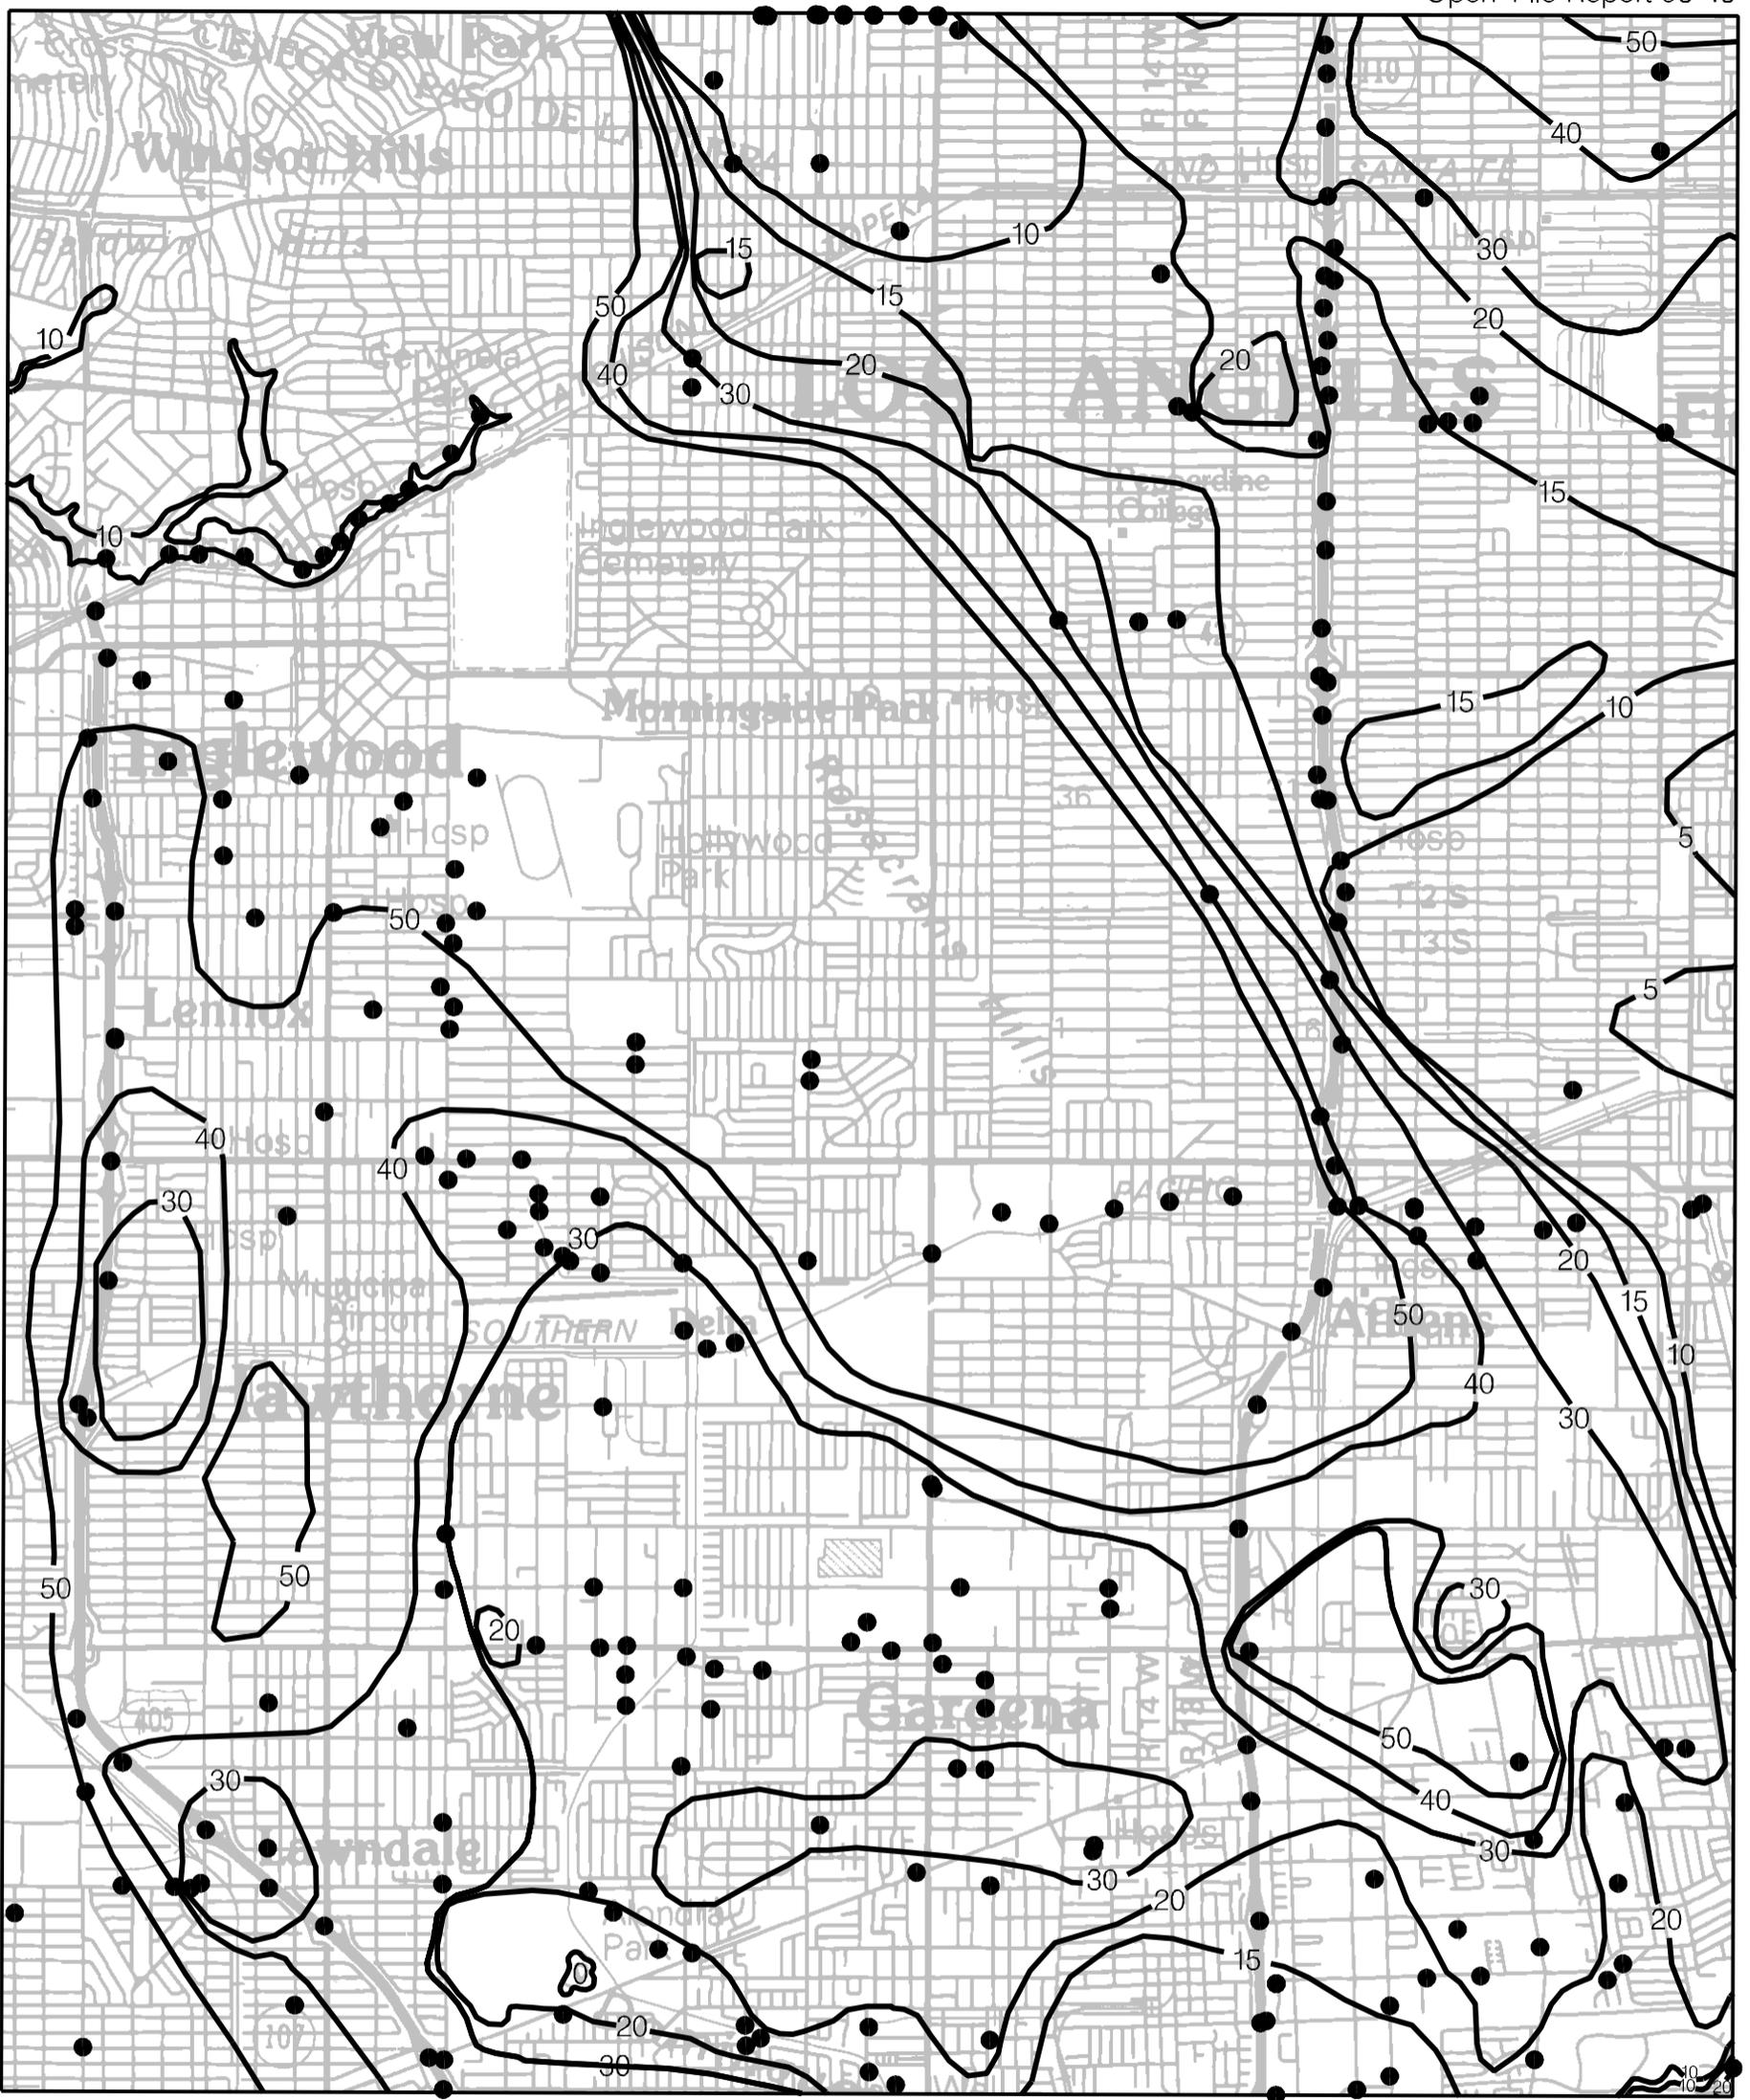


Base map enlarged from U.S.G.S. 30 x 60-minute series

Plate 1.2 Historically Highest Ground Water Contours and Borehole Log Data Locations, Inglewood Quadrangle.

● Borehole Site

— 30 — Depth to ground water in feet

ONE MILE
SCALE

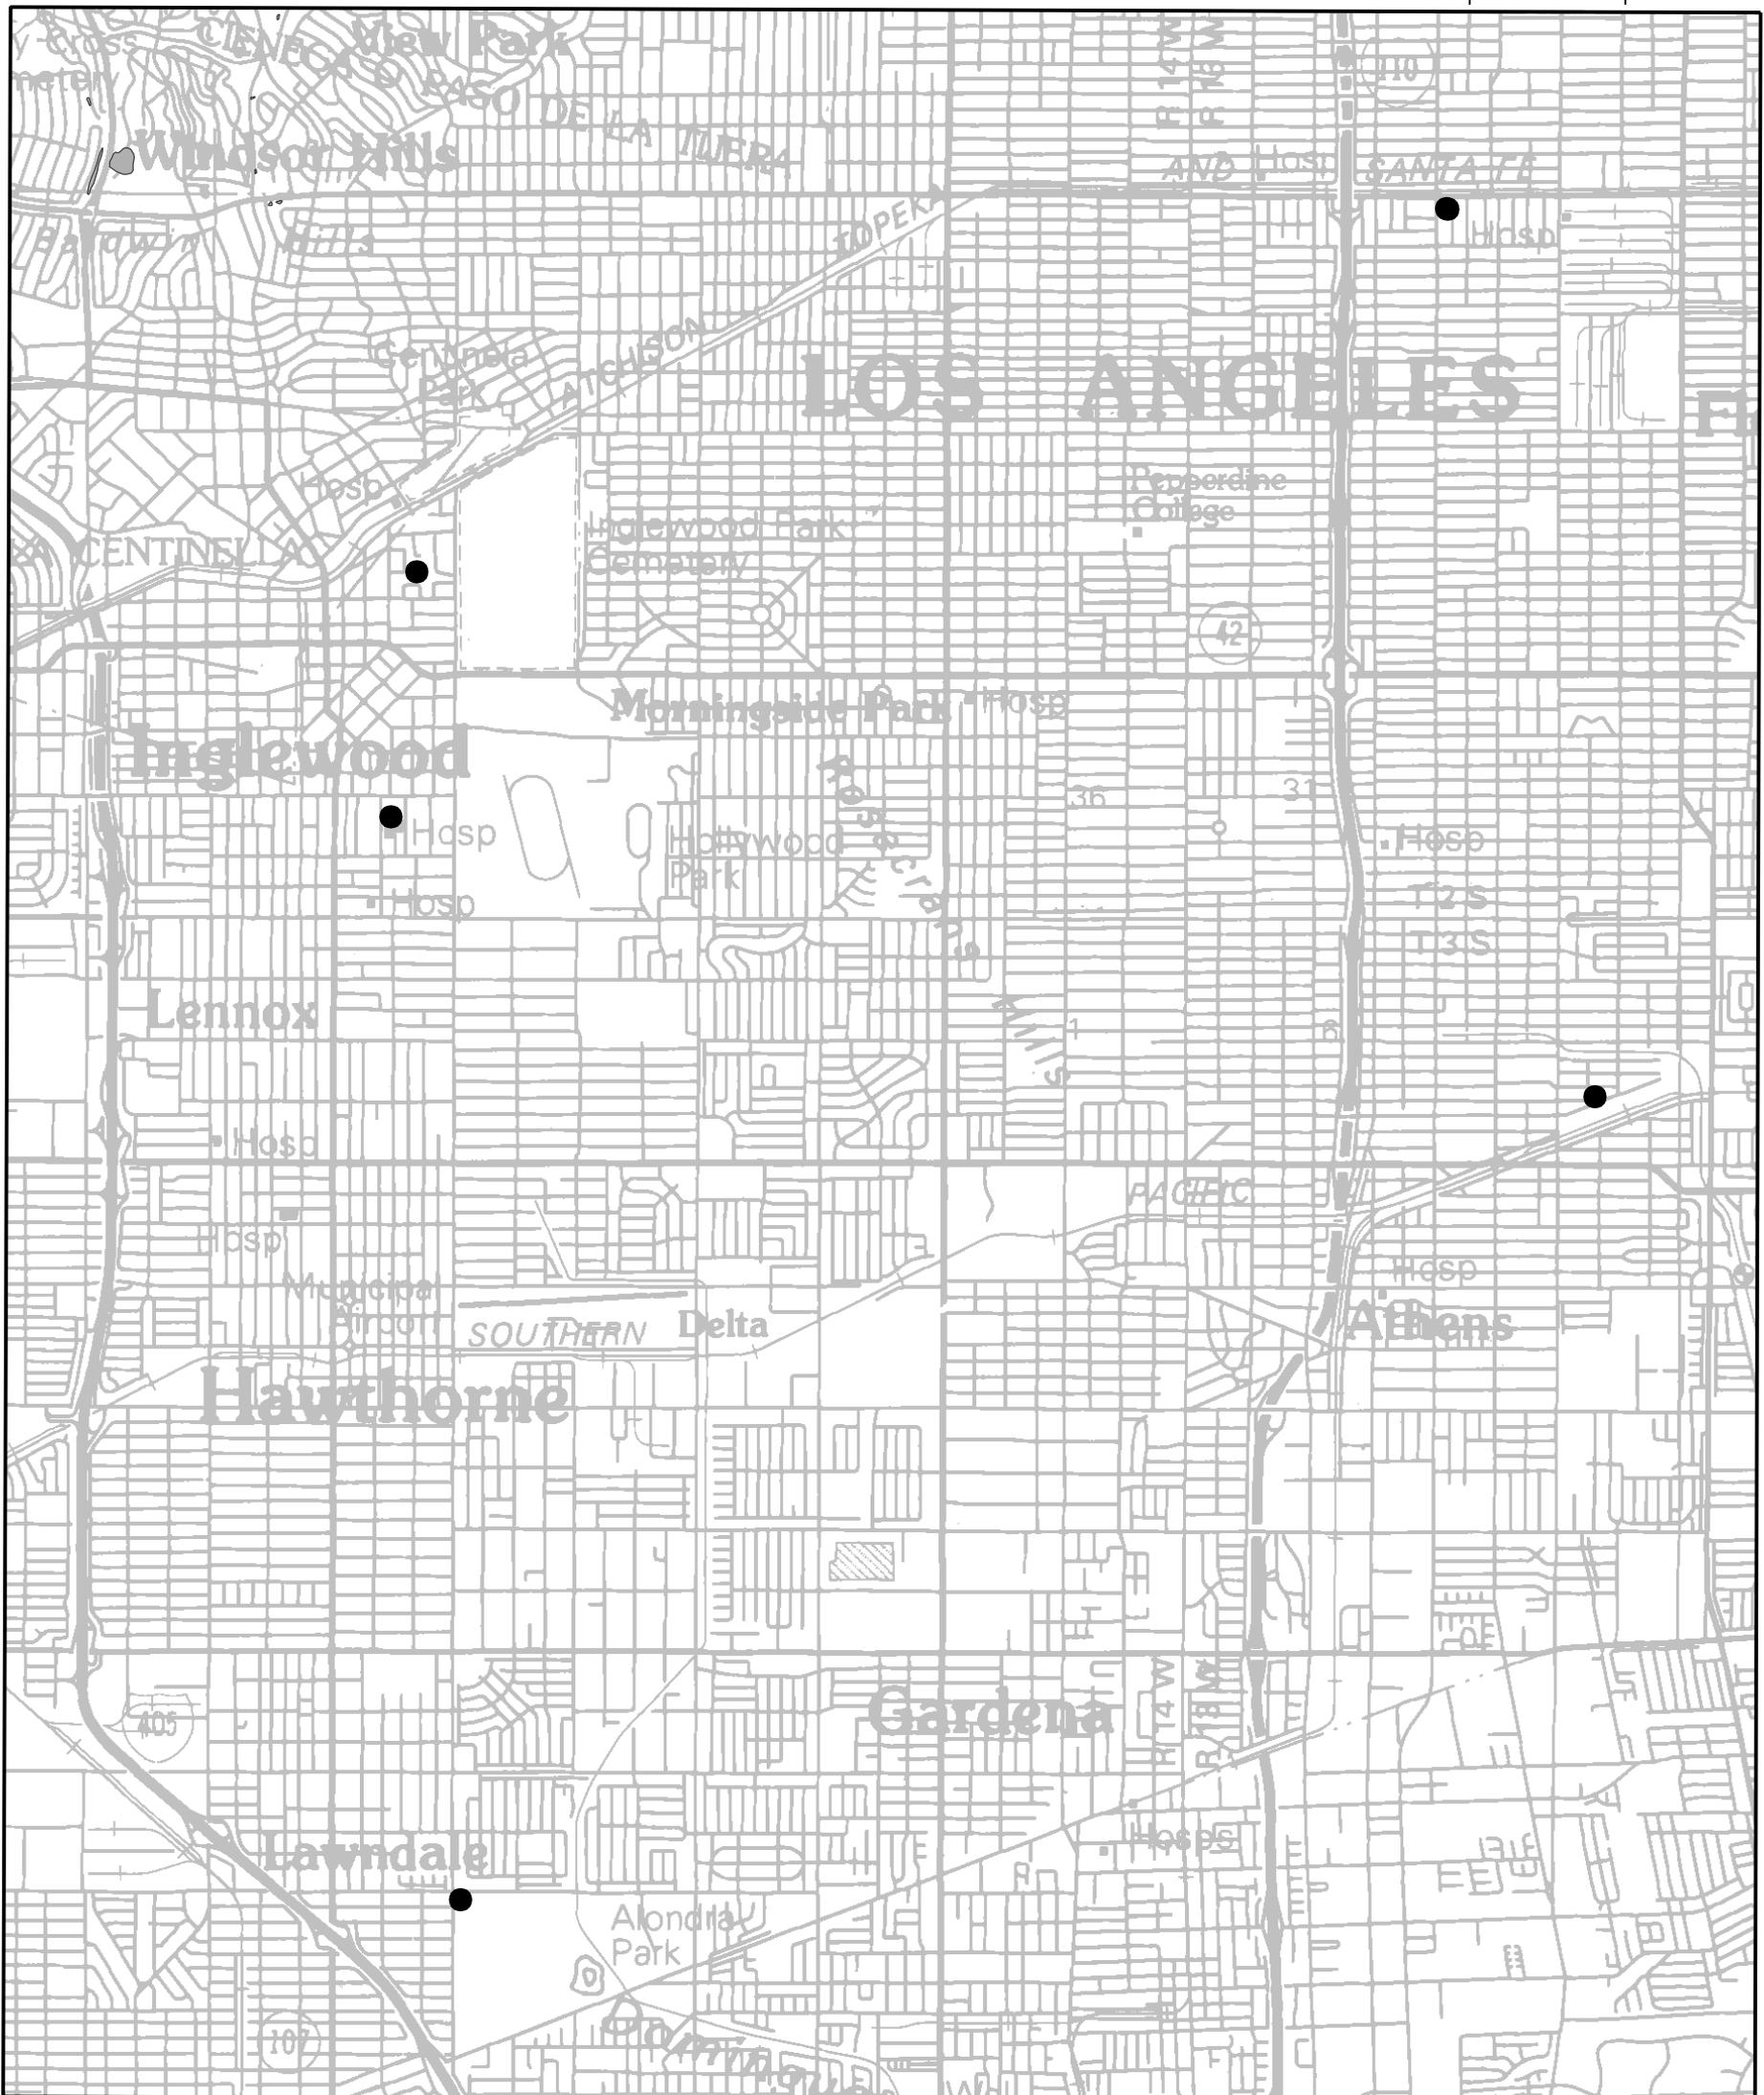

Base map enlarged from U.S.G.S. 30 x 60-minute series

Plate 2.1 Landslide inventory, Shear Test Sample Locations, Inglewood Quadrangle.

● shear test sample location ○ landslide

ONE MILE
SCALE